

# EASTON

TARGET



2021 CATALOG



# X10™

## ALUMINUM CARBON

USED TO WIN EVERY OLYMPIC TITLE SINCE 1996

- High-strength carbon fiber bonded to a 7075 alloy core
- Straightness: ± .001"
- Weight tolerance: ± 0.5 grains
- Barreled design
- *Components sold separately*



### RECOMMENDED COMPONENTS



**X10 Ballistic Tungsten Break-off Point**  
(100-120, 100-140 gr.) Fits all sizes.



**X10 Stainless Steel Break-off point**  
(80-100, 100-120 gr.) Fits all sizes.



**X10 Pin™**  
(8 gr.)



**Pin™ Nock**  
(2 gr.)



**X10 Over Nock™**  
(8 gr.)



**G Pin™ Nock (compound)**  
(4 gr.)

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Front Max Trim Inches	X10 Pin Fitment	X10 Point Fitment
325	9.2	.221	34.25	6.0	#1	All
350	8.8	.218	34	6.0	#1	All
380	8.9	.215	33.75	6.5	#1	All
410	8.5	.212	33.75	5.5	#1	All
450	8.1	.209	33.50	5.5	#1	All
500	7.8	.206	32	4.0	#1	All
550	7.5	.203	31	3.5	#1	All
600	7.0	.200	30	3.5	#1	All
650	6.8	.197	29	3.5	#1	All
700	6.7	.194	29	3.5	#1	All
750	6.4	.191	29	3.5	#1	All
830	6.2	.188	28.5	No Limit	#1	All
900	5.8	.185	28	No Limit	#1	All
1000	5.3	.182	28	No Limit	#1	All

1 Due to the barrel design of the X10, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Nominal O.D. at mid-point of shaft. Ends are smaller.

3 Recommended that no more than these lengths be cut from the front of the shaft.



# X10™

## PROTOUR™

## ALUMINUM CARBON

- Lightweight, high-modulus carbon fiber bonded to a precision 7075 alloy core
- Straightness: ± .001"
- Weight tolerance: ± 0.5 grains
- Tapered design
- Designed for compound
- *Components sold separately*



### RECOMMENDED COMPONENTS



**X10 Ballistic Tungsten Break-off Point**  
(100-120, 100-140 gr.) Fits all sizes.



**X10 Stainless Steel Break-off point**  
(80-100, 100-120 gr.) Fits all sizes.



**X10 Pin™**  
(8 gr.)



**Pin™ Nock**  
(2 gr.)



**G Pin™ Nock (compound)**  
(4 gr.)

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Front Max Trim Inches	X10 Pin Adapter Fitment	X10 Point Fitment
340	8.8	.213	34	7.0	#2	All
380	8.4	.207	34	7.0	#2	All
420	8.0	.202	33.75	6.5	#2	All
470	7.6	.198	33.75	6.0	#2	All
520	7.3	.194	32	5.5	#2	All
570	6.9	.191	31	5.0	#2	All
620	6.7	.188	30	4.5	#2	All
670	6.5	.186	29.75	4.0	#2	All
720	6.2	.183	29.75	No Limit	#2	All
770	6.0	.181	29	No Limit	#2	All

1 Due to the taper design of the X10 Pro Tour, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger-diameter neck end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Nominal O.D. at mid-point of shaft. Front end is smaller.

3 Recommended that no more than these lengths be cut from the front of the shaft.

A/C/E®

4MM ALUMINUM CARBON

- High-strength carbon fiber bonded to a 7075 alloy core
- Straightness: ±.0015”
- Weight tolerance: ±0.5 grains
- Barreled design
- Components—sold separately



RECOMMENDED COMPONENTS

NEW



4MM HL Stainless Steel Break-off Point  
(80 - 130 gr.)



4MM Pin™  
(9 gr.)



4MM G Nock™  
(7 gr.)



Pin™ Nock  
(2 gr.)



G Pin™ Nock (compound)  
(4 gr.)



4MM Microlite™ Nock  
(6 gr.)

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Max Trim Inches	4MM HL Point Fitment	4MM Point Fitment
370	7.9	.230	32.62	4.0	#1	#1
400	7.5	.230	32.62	4.0	#1	#1
430	7.0	.224	32.62	5.5	#1	#1
470	6.8	.223	32.62	6.5	#1	#1
520	6.7	.216	31.62	4.5	#1	#1
570	6.3	.216	31.62	10.0	#1	#1
620	6.1	.214	30.62	No Limit	#1	#1
670	5.9	.212	30.62	No Limit	#1	#1
720	6.4	.215	29.62	6.0	#1	#1
780	6.0	.216	29.62	No Limit	#1	#1
850	5.7	.213	28.62	No Limit	#1	#1
920	5.8	.213	28.62	9.5	#1	#1
1000	5.7	.213	28.62	No Limit	#1	#1
1100	5.1	.205	28.62	No Limit	#1	#1
1250	5.1	.205	28.62	No Limit	#1	#1

All sizes use: 4MM HL Point 80-130 grain #1 • 4MM ML Point 60-80 grain • 4MM Pin Adapter #1



PROCOMP™

4MM ALUMINUM CARBON

- High-strength carbon fiber bonded to a 7075 alloy core
- Straightness: ± .0015”
- Weight tolerance: ± 0.5 grains
- Parallel design
- Components—sold separately



RECOMMENDED COMPONENTS

NEW



4MM HL Stainless Steel Break-off Point  
(80 - 130 gr.)



4MM Pin™  
(9 gr.)



4MM G Nock™  
(7 gr.)



Pin™ Nock  
(2 gr.)



G Pin™ Nock (compound)  
(4 gr.)



4MM Microlite™ Nock  
(6 gr.)

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	4MM HL Point Fitment	4MM Pin Fitment
250	10.8	.245	34	#4	#4
300	9.5	.236	33.63	#4	#4
340	8.9	.231	33.63	#4	#4
380	8.3	.227	32.63	#3	#4
420	7.8	.224	32.63	#3	#3
470	7.3	.220	32.63	#2	#3
520	7.0	.217	32.63	#2	#2
570	6.6	.215	32.63	#2	#2
610	7.3	.218	31	#2	#2
660	6.9	.215	30.75	#2	#2
710	6.5	.213	30.5	#2	#2
810	6.1	.209	30	#1	#2
880	5.9	.207	29.5	#1	#2
1000	5.5	.204	29	#1	#1
1150	5.5	.203	28.5	#1	#1


NEW

# AVANCE™


## 4MM CARBON

- 100% carbon construction
- Straightness ± .0025"
- Weight tolerance ± 1 grain
- Components sold separately
- Parallel design

### RECOMMENDED COMPONENTS

  
**4MM ML Stainless Steel Point**  
[60-80, 70-90, 90-110, 100-120 gr.]

  
**Pin™ Nock**  
[2 gr.]

  
**4MM G Nock™**  
[7 gr.]

  
**4MM Microlite™ Nock**  
[6 gr.]

  
**G Pin™ Nock (compound)**  
[4 gr.]

  
**4MM Pin**  
[9 gr.]

Spine	Shaft Weight	Shaft OD	Stock Length	4MM ML Point Fitment				Nock Pin Adapter Fitment
	GPI	Inches	Inches	100-120 gr	90-110 grain	70-90 grain	60-80 grain	4MM Pin
340	8.8	.240	32.50	#4				#4
400	7.9	.234	32.09	#4				#4
450	7.4	.230	31.88	#4				#4
500	6.9	.227	31.50	#4				#4
550	6.5	.224	31.09		#3			#3
600	6.5	.224	30.72		#3			#3
660	6.2	.220	30.31		#3			#3
730	5.7	.217	29.72		#3			#2
810	5.5	.215	29.13			#2		#2
900	5.2	.211	28.75			#2		#2
1000	4.9	.209	28.34			#2		#2
1150	4.9	.208	28.16			#2		#2
1400	4.2	.205	29.00				#1	#1
1600	3.8	.202	28.75				#1	#1
1800	3.6	.200	28.50				#1	#1
2000	3.4	.198	28.25				#1	#1



NEW


# AVANCE™

## SPORT


## 4MM CARBON

- 100% carbon construction
- Straightness ± .005"
- Weight tolerance ± 1 grain
- Parallel design
- All fletched shafts include points & nocks
- Bare shaft components sold separately

### RECOMMENDED COMPONENTS

  
**4MM ML Stainless Steel Point**  
[60-80, 70-90, 90-110, 100-120 gr.]

  
**Pin™ Nock**  
[2 gr.]

  
**4MM G Nock™**  
[7 gr.]

  
**4MM Microlite™ Nock**  
[6 gr.]

  
**G Pin™ Nock (compound)**  
[4 gr.]

  
**4MM Pin**  
[9 gr.]

Spine	Shaft Weight	Shaft OD	Stock Length	4MM ML Point Fitment				Nock Pin Adapter Fit
	GPI	Inches	Inches	100-120 gr	90-110 grain	70-90 grain	60-80 grain	4MM Pin
340	8.8	.240	32.50	#4				#4
400	7.9	.234	32.09	#4				#4
450	7.4	.230	31.88	#4				#4
500	6.9	.227	31.50	#4				#4
550	6.5	.224	31.09		#3			#3
600	6.5	.224	30.72		#3			#3
660	6.2	.220	30.31		#3			#3
730	5.7	.217	29.72		#3			#2
810	5.5	.215	29.13			#2		#2
900	5.2	.211	28.75			#2		#2
1000	4.9	.209	28.34			#2		#2
1150	4.9	.208	28.16			#2		#2
1400	4.2	.205	29.00				#1	#1
1600	3.8	.202	28.75				#1	#1
1800	3.6	.200	28.50				#1	#1
2000	3.4	.198	28.25				#1	#1

# INSPIRE™

## CARBON

- High-strength small diameter carbon fiber construction
- Available in ten sizes
- Parallel design
- All fletched shafts include points & nocks

### RECOMMENDED COMPONENTS



**4MM Zinc Point**  
[70 gr.]



**5MM Zinc Point**  
[75 gr. 570 and 630 spines only]



**4MM G Nock™**  
[7 gr.]



**5MM X Nock™**  
[9 gr. 570 and 630 spines only]



**4MM Microlite™ Nock**  
[6 gr.]

630/570 sizes use 5MM components

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Nock Fitment	Zinc Point Fitment
570	8.2	.256	31.5	5MM	5MM #1
630	7.9	.254	30.5	5MM	5MM #1
750	8.1	.227	29.5	4MM	4MM #2
900	7.7	.223	28.5	4MM	4MM #2
1000	7.2	.220	27.5	4MM	4MM #2
1200	7.2	.220	27.25	4MM	4MM #2
1400	4.2	.205	29	4MM	4MM #1
1600	3.8	.202	28.75	4MM	4MM #1
1800	3.6	.200	28.5	4MM	4MM #1
2000	3.4	.198	28.25	4MM	4MM #1

# SUPERDRIVE™

## CARBON

# 19

- High-strength carbon fiber
- Straightness: ±.002"
- Weight tolerance: ±0.5 grains
- Outside diameter: 19/64" [7.5mm]
- Inserts, points, nocks & pin adapter—sold separately
- G UNI bushings—included

### RECOMMENDED COMPONENTS



**Superdrive 19 Adjustable Point**  
[90 gr.]



**Pin™ Nock**  
[2 gr.]



**G Pin™ Nock (compound)**  
[4 gr.]



**SD 19™ 4MM Bushing**  
[6 gr.]



**4MM G Nock™**  
[7 gr.]



**SD 19™ Pin**  
[11 gr.]



**4MM Microlite™ Nock**  
[6 gr.]


### ADJUSTABLE POINT SYSTEM



**Weight Screw**  
[Various lengths] [10-60 gr.]



**Stainless Steel Weight**  
[50 gr.]



**Adjustment Wrench**  
[not to scale]

Adjustable stainless steel point system, offering 90-200 grains of adjustment with interchangeable weight modules.

Pro-Point™ is a Trademark of Competition Archery Products, LLC

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
330	8.4	.281	33
380	7.8	.278	32
460	7.0	.273	31

# SUPERDRIVE™

## CARBON

# 23

- Multi-layer wrapped carbon fiber
- Polished black carbon finish
- Straightness: ±.002"
- Weight tolerance: ±1.0 grain
- Outside diameter: 23/64" [9.3mm]
- World Archery compliant outside diameter
- Inserts, points, nocks and pin adapter—sold separately
- Super or G UNI Bushings—included

### RECOMMENDED COMPONENTS



**SD 23™ Adjustable Point**  
[90 gr.]



**SD 23™ One-piece Point**  
[100 & 125 gr.]



**SD 23™ 4MM Bushing**  
[18 gr.]



**SD 23™ 6.5MM Bushing**  
[19 gr.]



**SD 23 Pin**  
[14 gr.]



**SD 23™ Insert**  
[40 gr.]



**Pin™ Nock**  
[2 gr.]



**G Pin™ Nock (compound)**  
[4 gr.]



**4MM G Nock™**  
[7 gr.]



**6.5MM MicroLite™ SuperNock™**  
[8 gr.]




**6.5MM Super 3D Nock™**  
[13 gr.]




**4MM Microlite Nock**  
[6 gr.]


### ADJUSTABLE POINT SYSTEM



**Weight Screw**  
[Various lengths] [10-60 gr.]



**Stainless Steel Weight**  
[50 gr.]



**Adjustment Wrench**  
[not to scale]

Adjustable stainless steel point system, offering 90-200 grains of adjustment with interchangeable weight modules.

Pro-Point™ is a Trademark of Competition Archery Products, LLC

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
325	7.4	.361	33.25
375	6.9	.359	32
475	6.4	.356	31.5


# SUPERDRIVE™

## CARBON


# 25

- Straightness: ± .002"
- Weight tolerance: ± 1.0 grain
- Outside diameter: 25/64"
- Specifically engineered for indoor and 3D
- Multi-layer wrapped carbon fiber
- Super and G UNI bushings—included
- Inserts, points, nocks and pin adapter—sold separately


### RECOMMENDED COMPONENTS



**SD 25™ Adjustable Point**  
[90 gr.]




**SD 25™ One-piece Point**  
[100 & 125 gr.]




**SD 25™ 4MM Bushing**  
[18 gr.]




**SD 25™ 6.5MM Bushing**  
[19 gr.]




**SD 25™ Pin**  
[14 gr.]




**SuperDrive 25 Insert**  
[50 gr.]




**Pin™ Nock**  
[2 gr.]




**G Pin™ Nock (compound)**  
[4 gr.]




**4MM G Nock™**  
[7 gr.]



**6.5MM MicroLite™ SuperNock™**  
[8 gr.]




**Super 3D Nock™**  
[13 gr.]




**4MM Microlite™ Nock**  
[6 gr.]


### ADJUSTABLE POINT SYSTEM



**Weight Screw**  
[Various lengths] [10-60 gr.]



**Stainless Steel Weight**  
[50 gr.]



**Adjustment Wrench**  
[not to scale]

Adjustable stainless steel point system, offering 90-200 grains of adjustment with interchangeable weight modules.

Pro-Point™ is a Trademark of Competition Archery Products, LLC

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
290	7.8	.396	32

# SUPERDRIVE™

## +MATCH GRADE

# CARBON

# 27

- High-strength carbon fiber
- Polished black carbon finish
- Straightness: ±.005"/Matchgrade ±.002"
- Weight tolerance: ±1.0 grains
- Outside diameter: 27/64"
- Points, and nocks—sold separately
- Super or G UNI Bushings—included
- Components—sold separately

### RECOMMENDED COMPONENTS



**SD 27™ Point**  
(100 ,200 & 250 gr.)



**SD 27™ Adjustable Point**  
(100 gr.)



**SD 27™ 4MM Bushing**  
(18 gr.)



**SD 27™ 6.5MM Bushing**  
(19 gr.)



**4MM G Nock™**  
(7 gr.)



**6.5MM MicroLite™ Super Nock™**  
(8 gr.)




**6.5MM Super 3D Nock™**  
(13 gr.)




**4MM Microlite™ Nock**  
(6 gr.)


### ADJUSTABLE POINT SYSTEM



**Weight Screw**  
(Various lengths) (10-60 gr.)



**Stainless Steel Weight**  
(50 gr.)



**Adjustment Wrench**  
(not to scale)

Adjustable stainless steel point system, offering 90-200 grains of adjustment with interchangeable weight modules.

Pro-Point™ is a Trademark of Competition Archery Products, LLC

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
270	9.0	.420	32.125


# RX7™

## DUAL SPINE ALUMINUM

- Designed for recurve bows
- Straightness: ± .001"
- Weight tolerance: ± 0.75%
- Strength (PSI) : 105,000
- Thick-wall front end easily copes with tough European target materials
- Three spines—525, 475, and 420- in a 21, 22, and World Archery™ Maximum 23 O.D.




### RECOMMENDED COMPONENTS




**Super UNI Bushing®**  
(19 gr.)



**Adjustable Bullet Point**  
(100 gr.)




**6.5MM MicroLite™ Super Nock™**  
(8 gr.)




**Super 3D Nock™**  
(13 gr.)


### ADJUSTABLE POINT SYSTEM



**Weight Screw**  
(Various lengths) (10-60 gr.)



**Stainless Steel Weight**  
(50 gr.)



**Adjustment Wrench**  
(not to scale)

Adjustable stainless steel point system, offering 90-200 grains of adjustment with interchangeable weight modules.

Pro-Point™ is a Trademark of Competition Archery Products, LLC

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Point Fitment	Bushing Fitment
23-420	10.4	.365	33.75	2315	2315
22-475	9.7	.348	33.5	2214	2214
21-520	9.3	.328	32.5	2114	2114



NEW

# 6.5 MATRIX™

## 6.5MM CARBON

- Uniform spine ACU-CARBON
- Pre-installed Microlite™ nocks
- 6.5 inserts included
- Straightness ±.003"



### RECOMMENDED COMPONENTS



6.5MM MicroLite™ Nock



6.5MM 3D Super Nock™



6.5MM™ Insert  
23 grains



4MM Microlite™ Nock  
6 grains



6.5MM Target Point  
80 & 100 Grains



6.5MM UNI Bushing®  
12 grains

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
500	6.9	.287	30.75
400	7.4	.291	31.25
340	8.1	.295	31.75
300	8.8	.298	32.25
250	9.4	.302	32.5

STANDARD .003"

NEW

# 6.5 MATRIX™

## MATCHGRADE

## 6.5MM CARBON

- Uniform spine ACU-CARBON
- Pre-installed Microlite™ nocks
- 6.5 inserts included
- Straightness ±.001"



### RECOMMENDED COMPONENTS



6.5MM MicroLite™ Nock



6.5MM 3D Super Nock™



6.5MM™ Insert  
23 grains



4MM Microlite™ Nock  
6 grains



6.5MM Target Point  
80 & 100 Grains



6.5MM UNI Bushing®  
12 grains

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
500	6.9	.287	30.75
400	7.4	.291	31.25
340	8.1	.295	31.75
300	8.8	.298	32.25
250	9.4	.302	32.5

MATCH GRADE .001"

# X23™

## ALUMINUM

- 7178-T9 aerospace alloy 2-tone finish
- Straightness: ±.001"
- Components—sold separately
- World Archery Tournament outside diameter compliant
- Black point end for better target contrast



### RECOMMENDED COMPONENTS



Adjustable Bullet Point



6.5MM MicroLite™ Super Nock™  
(8 gr.)




6.5MM Super UNI Bushing®  
(19 gr.)




6.5MM Super 3D Nock™  
(13 gr.)

### ADJUSTABLE POINT SYSTEM



Weight Screw  
(Various lengths) (10-60 gr.)



Stainless Steel Weight  
(50 gr.)



Adjustment Wrench  
(not to scale)

Adjustable stainless steel point system, offering 90-200 grains of adjustment with interchangeable weight modules. Bullet and CAP Pro-Points™ also available.

Pro-Point™ is a Trademark of Competition Archery Products, LLC

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	6.5 Bushing Weight [grains]
2312	.423	9.5	.363	33	11
2314	.391	10.8	.357	33.5	10
2315	.242	11.8	.365	34	11
2318	.200	13.7	.365	34.25	11

# X27™

## ALUMINUM

- 7178-T9 aerospace alloy 2-tone finish
- Straightness: ±.001"
- Components—sold separately
- Black point end for better target contrast



### RECOMMENDED COMPONENTS



Adjustable Bullet Point



6.5MM MicroLite™ Super Nock™  
(8 gr.)



6.5MM Super UNI Bushing®  
(19 gr.)




6.5MM Super 3D Nock™  
(13 gr.)

### ADJUSTABLE POINT SYSTEM



Weight Screw  
(Various lengths) (10-60 gr.)



Stainless Steel Weight  
(50 gr.)



Adjustment Wrench  
(not to scale)

Adjustable stainless steel point system, offering 90-200 grains of adjustment with interchangeable weight modules. Bullet and CAP Pro-Points™ also available.

Pro-Point™ is a Trademark of Competition Archery Products, LLC

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	6.5 Bushing Weight [grains]
2712	.260	11.3	.420	34.50	19

# X7ECLIPSE™

## ALUMINUM

- 7178-T9 aluminum alloy
- Hard-anodized black finish
- Straightness: ±.001"
- Weight tolerance: ±.75%
- Strength (psi): 105,000
- G-UNI/Super UNI bushing installed
- Nocks and points sold separately
- Sizes 1514 through 2214 are World Archery compliant



### RECOMMENDED COMPONENTS



NIBB Point



Bullet Point



6.5MM Super UNI Bushing®  
[19 gr.]



4MM G-UNI Bushing®  
[for sizes 1914 and smaller]



4MM G Nock™  
[for sizes 1914 and smaller] [7 gr.]



6.5MM MicroLite™ Super Nock™  
[8 gr.]



RPS Insert



4MM MicroLite™ Nock  
[6 gr.]



6.5MM Super 3D Nock™  
[13 gr.]

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	4MM Bushing Weight (Grains)	6.5MM Bushing Weight (Grains)	Bullet Point Weight (grains)	NIBB Point Weight (grains)	Insert Weight (grains)	Screw-In Point Size
2613	.265	11.5	.414	34.75	22	17	150	NA	58	3/8
2512	.321	10.3	.398	34.5	20	15	100	108	52	11/32
2511	.348	9.6	.396	34.38	20	15	100	108	52	11/32
2413	.365	10.5	.372	34	17	12	100	110	40	11/32
2214	.425	10.4	.318	33.38	14	9	100	103	NA	NA
2213	.458	9.9	.344	33.5	13	9	100	88	30	11/32
2212	.505	8.8	.345	32.5	14	9	100	102	31	11/32
2114	.510	9.9	.328	32.5	11	7	100	78	25	5/16
2014	.579	9.6	.314	31.63	10	5	NA	71	NA	NA
1914	.658	9.3	.300	30.88	9	NA	NA	64	NA	NA
1814	.799	8.6	.284	29.88	8	NA	NA	60	NA	NA
1714	.963	8.1	.268	29.38	7	NA	NA	56	NA	NA
1614	1.153	7.7	.251	28.25	5	NA	NA	51	NA	NA
1514	1.379	6.8	.244	26.5	5	NA	NA	61	NA	NA

# XX75

## PLATINUM® PLUS

## ALUMINUM

- 7075-T9 aluminum alloy
- Hard-anodized finish
- Straightness: ± .002"
- Weight tolerance: ± 1%
- Super or G UNI bushings—installed
- Components—sold separately



### RECOMMENDED COMPONENTS



NIBB Point



Bullet Point



6.5MM Super UNI Bushing®  
[19 gr.]



MicroLite™ Super Nock® 6.5MM  
[8 gr.]



6.5MM Super 3D Nock™ [13 gr.]



4MM G-UNI Bushing®  
[for sizes 1914 and smaller]



RPS Insert



4MM Micro Nock  
[6 gr.]



4MM G Nock™  
[for sizes 1914 and smaller] [7 gr.]

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Bushing Weight 4MM (Grains)	Bushing Weight 6.5MM (Grains)	Bullet Point Weight (grains)	NIBB Point Weight (grains)	Insert Weight (grains)	Screw-In Point Size
2315	.342	11.7	.365	32	22	17	150	NA	58	3/8
2213	.458	9.8	.344	31	20	15	100	108	52	11/32
2114	.510	9.9	.328	31	20	15	100	108	52	11/32
2016	.531	10.6	.312	32	17	12	100	110	40	11/32
2013	.610	9.0	.313	32	14	9	100	103	NA	NA
1916	.623	10.0	.297	31	13	9	100	88	30	11/32
1913	.733	8.3	.298	31	14	9	100	102	31	11/32
1816	.756	9.3	.281	30	11	7	100	78	25	5/16
1813	.874	7.9	.282	30	10	5	NA	71	NA	NA
1716	.880	9.0	.266	29	9	NA	NA	64	NA	NA
1713	1.044	7.4	.266	29	8	NA	NA	60	NA	NA
1616	1.079	8.4	.250	28.5	7	NA	NA	56	NA	NA
1516	1.403	7.3	.234	28.5	5	NA	NA	51	NA	NA
1416	1.684	7.2	.219	27	5	NA	NA	61	NA	NA

# XX75™

## JAZZ®

### ALUMINUM

- 7075 aerospace alloy
- Hard-anodized finish
- Straightness: ± .005"
- Weight tolerance: ±2%
- Strength (psi): 90,000
- Precision-ground nock swage
- Components—sold separately



#### RECOMMENDED COMPONENTS



NIBB Point



Conventional Nock



RPS Insert



Economy Point



4MM G Nock™  
(for sizes 1914 and smaller) [7 gr.]



Bullet Point

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Conventional Nock Size	Bullet Point Weight (grains)	Economy Point Weight (grains)	NIBB Point Weight (grains)	Insert Weight (grains)	Screw In Point Size
2016	.531	10.6	.312	32	5/16	90	70	80	20	5/16
1916	.623	10.0	.297	31	9/32	82	65	72	16	5/16
1816	.756	9.3	.281	30	9/32	74	60	63	12	9/32
1716	.880	9.0	.266	29	1/4	68	55	60	10	17/64
1616	1.079	8.4	.250	28.5	1/4	63	50	56	NA	NA
1516	1.403	7.3	.234	27.5	1/4	54	45	48	NA	NA
1416	1.684	7.2	.219	27	7/32	52	40	46	NA	NA
1413	2.036	5.9	.216	26	7/32	35	NA	NA	NA	NA
1214	2.501	5.9	.197	26.5	4MM	45	NA	NA	NA	NA

# XX75™

## TRIBUTE™

### ALUMINUM

- 7075 aerospace alloy
- Hard-anodized black finish
- Straightness: ±.005"
- Weight tolerance: ±2%
- Strength (psi): 90,000
- Precision-ground nock swage
- Components—sold separately



#### RECOMMENDED COMPONENTS



NIBB Point



Conventional Nock



RPS Insert



Economy Point



4MM G Nock™  
(for sizes 1914 and smaller) [7 gr.]



Bullet Point

Size	Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches	Conventional Nock Size	Bullet Point Weight (grains)	Economy Point Weight (grains)	NIBB Point Weight (grains)	Insert Weight (grains)	Screw In Point Size
2016	.531	10.6	.312	32	5/16	90	70	80	20	5/16
1916	.623	10.0	.297	31	9/32	82	65	72	16	5/16
1816	.756	9.3	.281	30	9/32	74	60	63	12	9/32
1716	.880	9.0	.266	29	1/4	68	55	60	10	17/64
1616	1.079	8.4	.250	28.5	1/4	63	50	56	NA	NA
1516	1.403	7.3	.234	27.5	1/4	54	45	48	NA	NA
1416	1.684	7.2	.219	27	7/32	52	40	46	NA	NA
1413	2.036	5.9	.216	26	7/32	35	NA	NA	NA	NA
1214	2.501	5.9	.197	26.5	4MM	45	NA	NA	NA	NA

# GENESIS™

## ALUMINUM

- 7075 aerospace alloy
- Hard-anodized
- Straightness: ±.005"
- Weight tolerance: ±2.5%
- Strength (psi): 90,000
- UNI bushing, nock, and point—installed



National Archery in the Schools Program  
The ONLY arrow approved for all NASP® tournaments and events.  
Available in black, purple, green, and teal.

### RECOMMENDED COMPONENTS



Genesis Point



N Nock™  
(7 gr.)



UNI Bushing®  
(18 gr.)

Spine	Shaft Weight GPI	Shaft O.D. Inches	Stock Length Inches
1820	12.2	.282	30

# XX75™

## NEOS™

## ALUMINUM

- 7075 aerospace alloy
- Hard-anodized gold finish
- Straightness: ±.008"
- Weight tolerance: ±5%
- Precision-ground nock swage
- Size 1618
- Components—sold separately



### RECOMMENDED COMPONENTS



Neos Point



Conventional Nock

Size	Spine	Shaft Weight	Shaft O.D. Inches	Stock Length Inches	Conventional Nock Size	Neos Point Weight
1618	.957	9.8	.255	32.5	1/4	50





# EZ FLETCH™

## Fletching Tools

### (A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"



### (B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"



### (C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"



### (D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"



## VANES

All weights are within ±0.5 grain

### 2" BULLY™ VANES

Ultra-stiff design for high speed stability



Size	Length (in)	Height (in)	Weight (grain)	Colors	
200	2.00	.568	6.5	● Fire Orange ● Bright Green	● Red ● Yellow ○ White

### BULLY BOAT TAIL™ VANES

Ultra-stiff design for high speed stability • Exclusive Boat Tail shape for superior accuracy



Size	Length (in)	Height (in)	Weight (grain)	Colors	
200	2.00	.500	7	● Bright Green ● Yellow ● Red	● Fire Orange ○ White
300	3.00	.500	10		100 Ct. 100 Ct.

EZ Fletch is a trademark of Arizona Rim Country, Inc.

## DIAMOND HD 3" VANES™



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	● Bright Green ● Yellow ● Blue	● Red ○ White ● Pink ● Orange

## DIAMOND VANES™



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
175	1.750	.375	3	● Bright Green ● Sunset Gold ● Yellow	● Fire Orange ○ White ● Black ● Hot Pink
235	2.375	.375	4		
280	2.875	.500	6		
380	3.875	.500	8		

## TITE FLIGHT™ VANES

Special rib adds stiffness to cut in-flight flutter and noise



Size	Length (in)	Height (in)	Weight (grains)	Colors	Packaging
200	2.00	.330	4	● Hot Pink ○ White ● Bright Green	● Black ● Fire Orange ● Yellow

## SPIN WING VANES™

1.75-inch vanes available in right or left • Packaging - 50-count bag



Colors ● Black ○ White ● Blue ● Red ● Yellow

Spin Wing Vane is a trademark of Range-O-Matic Archery Company.

# STABILIZERS



NEW COLORS

## HALCYON™

- Very low resonance for faster damping and a steadier hold
- Unmatched wind drag resistance
- Class-leading 14MM ultra-high modulus graphite fiber construction
- Windcutter 360 design
- Weights not included

	Main Stabilizers			Side Rods		
Size	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-76 cm
Ounces	4.4	4.7	5	2.9	3	3.4
Grams	125.5	133	140	83.1	88.3	96.6



Halcyon stabilizers come with a reusable protective sleeve



NEW COLORS

## CONTOUR CS™

- Complex unidirectional and cross weave High Modulus Carbon and Ultra High Modulus Graphite construction for extreme stiffness, fast damping rate and a steadier hold for both compound and recurve
- Proven in both compound and recurve top level competition worldwide
- Extremely light weight, greater stiffness to weight ratio than any stabilizer currently available
- Drag reducing Windcutter 360 design
- Weights not included

Includes reusable protective sleeve and 1/4-20 to 5/16-24 adapter.

	Main Stabilizers			Side Rods		
Size	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-76 cm
Ounces	4.0	4.3	4.5	2.5	2.6	2.85
Grams	115	122	128	71	74	81



Contour CS stabilizers come with a reusable protective sleeve

STABILIZERS



CONTOUR™

- Complex High Modulus Carbon, multi-diameter design
- Faster damping and a steadier hold with less wind drag
- Stiff and light self-damping design ideal for recurve performance
- Weights not included

	Main Stabilizers				Side Rods		
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	3.7	4.0	4.3	4.6	2.5	2.7	2.9
Grams	106	114	123	131	71	75	83



Z-FLEX™

- High stiffness ideal for top level compound and 3D competition
- High Modulus Carbon construction
- Built-in AVRS damping system
- Less aiming float and highly efficient
- Weights not included

	Main Stabilizers				Side Rods		
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm
Ounces	5.8	6.2	6.5	6.9	3.2	3.5	3.9
Grams	164	175	186	196	92	99	111



- Ultra-stiff design for steady aiming
- AVRS™ damping for active-shock management
- Lowest mass and highest efficiency



Z-Flex stabilizers come with a reusable protective sleeve



Z COMP™

- Balanced feel with lower mass and smaller diameter
- High Modulus Carbon construction
- Weights not included

	Main Stabilizers			Side Rods	
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	10 in-25 cm	12 in-30 cm
Ounces	5.8	6.2	6.5	3.2	3.5
Grams	164	175	186	92	99



- Ultra-stiff design for steady aiming
- Fast-damping high frequency response
- AVRS damping for active-shock management
- 100% high modulus carbon at a smaller 0.600" diameter



MICROFLEX™

- Balanced feel with lower mass and smaller diameter
- High modulus carbon construction
- Weights not included

Main Stabilizers				Side Rods	
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	10 in-25 cm	12 in-30 cm
Ounces	5.8	6.2	6.5	3.2	3.5
Grams	164	175	186	92	99



- Ultra-stiff design for steady aiming
- Fast-damping high frequency response
- AVRS damping for active-shock management
- 100% high modulus carbon at a smaller 0.600" diameter

PRO-LINK™ EXTENDER

- Internal stainless steel reinforcement beam with high modulus carbon construction
- Stiffest extension ever made by Easton
- Engineered for extreme reliability

PROLINK Extender			
Size	6 in-15 cm	5 in-13 cm	4 in-10 cm
Ounces	4.6	4.3	4.0
Grams	131	122	113



Pro-link internal steel beam system



VARI-WEIGHTS



	Ounces	Grams
Module	1.5	43
1/2 Module	0.75	21
Cap	1.5	43

FLAT VARI-WEIGHTS 5/16-24 THREAD

	Ounces	Grams
Halcyon/Contour Base	2.0	57
Z Flex Base	2.0	57
1 Oz.	1.0	28.5
2 Oz.	2.0	57
4 Oz.	4.0	114



ALSO AVAILABLE IN BLACK

MOUNTS

FIXED V-BAR WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt— included



ADJUSTABLE V-BAR WITH BOLT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt included



ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel eye bolt included



CONTOUR AND Z-FLEX™ V-BAR CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down



QUICK DISCONNECT MOUNT

- Stainless steel
- 7075 alloy
- Precision design
- Zero and 10 degree drop models available



TOOLS & SUPPLIES

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz.
- HIT approved



CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



FASTSET™ VANE GEL

- Sizes: 3 gram



CROSSBOW RAIL LUBE

- Full synthetic formula provides maximum lubrication for crossbow rails
- Protects string from damage



3-STEP BOWSTRING MAINTENANCE KIT

- String Cleaner —removes dirt, wax and contaminants from bowstring
- Bowstring Revitalizer—restores color and penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax—protects longer & better than conventional waxes



WEDGE ARROW PULLER

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep-sights
- Includes 1m red thread and 1m black thread



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz.



QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



FLETCH-TITE® PLATINUM

- Size: 22-gram tube



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Available in 10" shop stick



FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



PUCK ARROW PULLER

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage
- Best for tight single spot groups



BROADHEAD WRENCH

- For safe installation and removal of broadheads from arrows



BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools



ANGEL MAJESTY™ SERVING

- Two sizes .018 and .021.
- Highest quality serving available
- Greatest dimensional stability
- Extremely long wearing
- Made in Japan
- .018 —100 meters/109 yds. per spool
- .021 —80 meters/87 yds. per spool




BCY™ POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool



ELITE NOCK AND D-LOOP PLIERS

- Maximizes mechanical advantage for tightest possible D-loops
- Patented dual-jaw design
- Convenient and versatile archery tool
- Six tools in one

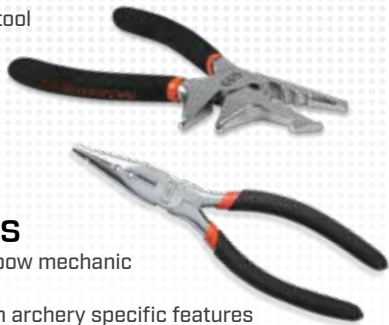


PRO ARCHERY NEEDLE-NOSE PLIERS

- A must have for any serious bow mechanic
- Rubber-coated handle
- Needle-nose plier design with archery specific features for D-loop stretching and hot-melt point installation

ARCHERY OMNI TOOL BY FIX-IT STICKS® – 17 PIECE

- Integrates 17 of the most popular Standard & Metric Hex, and Star bit sizes into the most compact archery tool ever produced
- Snaps together in a T-shape for leverage
- Compatible with any standard 1/4" drive bit
- Breaks down for portability but durable enough for shop use
- Perfect for servicing all types of compound and recurve bows, cam modules, and accessories
- Includes the following bit sizes:  
Standard Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050"  
Metric Sizes: 1.5, 2.5, 3.0  
Star Tip Sizes: T10, T15, T20

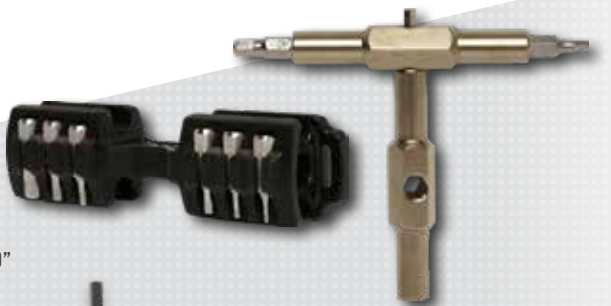

PRO HEX FOLD UP SET - STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050

PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64

PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and a 1/8" flat blade screwdriver

PRO HEX STUBBY 10 PIECE "L" WRENCH SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4

PRO HEX LIMB MASTER ALLEN WRENCHES

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually in sizes 7/32 and 1/4



Fletch-Tite® is a registered trademark of Bohning Company LTD

ASB Majesty is a trademark of Angel Co., Ltd. Fix-it Sticks Registered Trademark of Titan Product Development LLC.

TOOLS & SUPPLIES

BOW-SQUARES

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up



RECURVE BOW STRINGER

- Molded rubber-cupped stringer recommended for stringing target recurve bows
- Makes stringing safe and easy



9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to 27/64" diameters



ARCHERY ESSENTIALS™ TOOL KITS

- Kit items save 30% versus items sold separately
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors

12 AND 8 PIECE KITS INCLUDE:

- Extra large folding allen wrench set
- Nock installation & removal tool
- Wedge arrow puller
- Zippered Case Cube
- Bowstring wax
- Serving thread
- D-Loop rope
- Broadhead wrench

6-PIECE CROSSBOW KIT INCLUDES:

- Small folding allen wrench set
- Zippered Cube Case
- Rail lube wax
- Wedge arrow puller
- Broadhead wrench
- Scope lens cleaner cloth

12-PIECE KIT ADDS:

- D-Loop pliers
- Bow-square-L model
- Small folding allen wrench set
- Arrow prep tool kit



6-PIECE CROSSBOW KIT

8-PIECE VALUE PACK

SHOOTING ACCESSORIES



STAY SHARP™ BROADHEAD CASE

- Grippers ensure broadhead sharpness by supporting ferrules without contacting blades
- Hold six mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads
- Dimensions: approximately 5"W x 4"H x 2"D



DELUXE ARM GUARD

- Progressive designs molded from durable poly-carbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and "dog" bone shapes
- Colors: blue, red, yellow, and smoke



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL, and XXL
- Color: black/white



COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: black



STIFF WRIST SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: black, camo, green, pink, blue, red, and orange



DELUXE PARACORD DIAMOND WRIST SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: black, camo, green, pink, blue, red, and orange



NEOPRENE WRIST SLING

- Durable, lightweight neoprene construction
- Easy-adjust strap



COMPETITION QUIVERS



ELITE™ FIELD QUIVER WITH BELT

- European-inspired luxurious design
- Technical synthetic leather construction
- Infinitely adjustable and sturdy, Elite quiver belt uses secure T-style buckle
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet, customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included-release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white



ELITE™ QUIVER BELT

- One size fits most
- T-style buckle
- Included with Elite quivers—also sold separately
- Colors: red, blue, grey, carbon black, and white



ELITE™ RELEASE POUCH



ELITE™ TAKEDOWN HIP QUIVER WITH BELT


- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, Elite quiver belt with T-style buckle for secure operation-included
- Allows quiver body tube to separate from belt loop for easy storage
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white



\*Modular system can accommodate multiple configurations

DELUXE FIELD QUIVER WITH BELT

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Adjustable, sturdy Deluxe Quiver belt with T-style buckle included
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch sold separately
- Colors: teal, silver, red, blue, purple, and black
- Left-hand models only available in black and silver

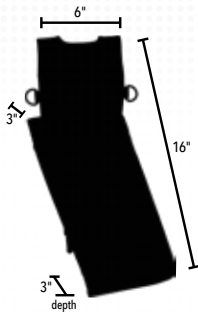

DELUXE QUIVER BELT

- One size fits most
- Innovative hook-and-loop adjustment
- Easy on/off T-buckle connection



DELUXE RELEASE POUCH



DELUXE TAKEDOWN HIP QUIVER WITH BELT

- Allows quiver body tube to separate from belt loop for easy storage
- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Adjustable Deluxe Quiver Belt with T-style buckle included
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory-attachment rings
- Colors: teal, silver, red, blue, purple, and black
- Left-hand models only available in black and silver



# RECREATIONAL QUIVERS



## FLIPSIDE™ 4-TUBE HIP QUIVER WITH BELT

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop upper and lower pockets for wear on right or left side
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



Realtree and Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd



## FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.



REPLACEMENT FLIPSIDE™ ARROW TUBE



REPLACEMENT BELT CLIP



## FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: flo-green, teal, black, red, blue, and Realtree Edge®



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.



# BOW CASES

## NEW BOWTRUK™ 4716 TRAVEL BOWCASE

- Accommodates two bows up to 47"
- 47" L X 16" W X 9" H
- Cordura 1680D Type 6,6 ballistic nylon shell
- Six interior & exterior accessory pockets for bow-sights, gear, and arrows
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Double seatbelt-style bow retainment straps
- Padded carry handle
- Compatible with Easton arrow totes & boxes
- Hybrid hard/soft shell perimeter protection
- Dark grey



## DELUXE 3615 COMPOUND/RECURVE ROLLER BOW CASE

- Advanced wheeled compact travel case for compound/recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Dimensions [36"Lx15"Wx9"H]
- Compatible with the Easton Deluxe 33" & 36" arrow cases
- Case-cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter for maximum contents protection
- Airline travel cover recommended (sold separately)
- Color: black/orange

### ROLLER BOWCASE TRAVEL COVER

- Fits Deluxe 3615 Roller Recurve bow case
- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot
- Water resistant



## ELITE 2.0 4717 DOUBLE BOW CASE

- Accommodates two full-size target bows up to 47" in overall length
- Case-cube compatible double-fleece main compartment
- Double or single bow with opposite side clothing storage
- 360° exterior padding
- Dimensions 47"x17"
- Movable hook-and-loop bow anchor system
- Eight interior and exterior accessory pockets with dedicated separate compartments for quivers, stabilizers, and arrow storage
- Compatible with Easton arrow totes & Deluxe 33" & 36" arrow boxes
- Padded shoulder strap and comfortable carry handle
- Available in black/grey color



## WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with Easton Deluxe Hip/Field quivers
- Dense 360 degree exterior/corner cam padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: flo-green, teal, red, black, and blue



## WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Eight interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable hook-and-loop bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: NEW charcoal, Realtree® Edge, teal/grey, olive/grey



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

## BOW-GO™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow mounted quivers and maximum inside storage
- Four interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: NEW black, Realtree® Edge, olive/grey



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

### DELUXE 4517 BOW CASE

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear
- Compatible with all Easton arrow tote and arrow case models
- Premium oversized #10 zippers with easy-grab pulls
- Cavernous 3.5" case-cube compatible fleece-lined padded interior [case cubes sold separately]
- Fits most bows —interior dimensions 44" x 16"
- Movable bow-anchoring straps for rock-solid bow security
- 360° padding for complete bow protection
- Colors: Realtree® Max-1/lavender



Realtree Max1 is a trademark of Jordan Outdoor Enterprises, Ltd.

### MICRO FLATLINE™ 3618

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors: pink/yellow, black/grey, grey/red, Realtree® Edge



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

### GENESIS™ 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Blue, Pink, and Black
- 40" L x 14" H



### BOWSLICKER™

- Easy, secure carry with patented limb loop design
- Quick and quiet removal
- Keep cams and strings protected from brush
- Fits all compound bows, including parallel limbs, up to 36" axle-to-axle
- Color: Olive Green



Officially Licensed Product  
Protected by US Patents:  
9,038,878 & 9,310,158

## NOCKS

### INDEXABLE NOCKS



**4MM G Nock™ Precision-molded, Press-fit**  
Colors: blue, white, green, orange, deep red  
Throat: Small=0.096, Large= 0.112  
Dozen Pack and 100-count Bulk  
6 grains



**6MM H Nock™**  
Colors: white, yellow, green, orange, deep red  
Throat: 0.111  
Dozen Pack and 100-count Bulk  
9 grains



**6.5MM MicroLite™ Super Nock™**  
Colors: blaze, emerald, yellow, red, smoke, white  
Throat: 0.108  
Dozen Pack and 100-count Bulk  
8 grains



**X10® Overnock – Polymer Alloy**  
Fits X10, see arrow models for fitment  
Colors: orange, yellow, and green  
Packaging – Dozen Pack  
6 grains



**4MM Microlite™ Nock**  
Colors: deep red, green, lemon-lime and blue  
Throat: 0.112  
Dozen Pack and 100-count Bulk  
6 grains



**N Nock™**  
Fits Genesis  
Colors: red, white, green, orange, grey, yellow  
Dozen Pack and 100-count Bulk  
17 grains



**Pin Nock™**  
Large or small sizes available  
Fits all nock pins, see arrow models for fitment  
Colors: blue, pink, green, red, orange, lemon-lime, & crystal  
Packaging – Dozen Pack  
2 grains



**5MM X Nock™**  
Colors: black, white, yellow, green, orange, blue, smoke, bone, red  
Throat: 0.111  
Dozen Pack and 100-count Bulk  
9 grains




**6.5MM 3D Super Nock™**  
Colors: black, green, orange, white, crystal, lemon-lime, purple, red, and smoke, pink, blue  
Throat: 0.103  
Dozen Pack and 100-count Bulk  
13 grains



**G Pin Nock™**  
Fits all nock pins, see arrow models for fitment  
Colors: blue, green, red, orange, lemon-lime, & crystal  
Packaging – Dozen Pack  
4 grains

### CONVENTIONAL NOCKS



**Conventional Nock—Swaged Shafts**  
Colors: green, orange, white, red  
Dozen Pack and 100-count Bulk

PACKS

CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with great features
- High-denier fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: teal, flo-green, grey, blue, red, and black



DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks

BOW CASE ACCESSORIES



CASE CUBES™ BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



QUARTER CUBE  
7.5" X 7.5"



HALF CUBE  
7.5" X 15"



CORNER CUBE  
7.5" X 10"

BOW SLEEVE

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all Easton bowcases



STABILIZER SYSTEM SLEEVE

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all bowcases



DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
  - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
  - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
  - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
  - Round Arrow Tote (12-arrow) - adjustable length





VECTOR™ CARBON ARROWS

- Ideal for beginners looking for higher performance
- Durable wrapped carbon construction
- Nocks and 65-grain points installed—ready to shoot
- Shield-feather fletch
- Available in 1000 and 1400 spine sizes
- Available in 4-pack or 72-count case
- 28" length

ARCHERY COMBO PACK

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high-strength 28” arrows
- Finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: Black and Pink



BEGINNER FINGER TAB

- For right handed archers



SCOUT 2™

- Durable fiberglass construction
- Over Nock – installed
- Sleeve Point – installed
- 26" or 28"



BEGINNER BOW

The Easton beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52” bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron™ string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26” draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard



Kit colors: Black, Pink, and Realtree® Xtra



ARROW SELECTION

USING THE TARGET ARROW SELECTION CHART


- Once you have determined your Correct Target Arrow Length and Calculated or Actual Peak Bow Weight, you are ready to select your correct shaft size:
  - 1.A** Compound bows. In the "Calculated Peak Bow Weight" column (left-hand side of the chart), select the column with the type of cam on your bow. Locate your Calculated Peak Bow Weight in that column.
  - 1.B** Recurve bows and Modern Longbows. In the "Recurve Bow Weight" column (right-hand side of the chart), select the column with the bow type. Next, locate your Actual Peak Bow Weight in that column.
- Move across that bow-weight row horizontally to the column indicating your Correct Arrow Length. Note the letter in the box where your Calculated or Actual Peak Bow Weight row and Correct Target Arrow Length column intersect. The "Shaft Size" box below the chart with the same letter contains your recommended shaft sizes. Select a shaft from the chart depending on the shaft material, shaft weight, and type of shooting you will be doing.

SELECTING THE CORRECT TARGET SHAFT SIZE


Our Target Shaft Selection Chart will help you find the perfect shaft match for your bow—quickly & easily. Advanced, interactive Spine Weight Comparison and Target Shaft Selection Charts are now available online at eastonarchery.com

1. Determining Correct Target Arrow Length

The Correct Arrow Length for bows (including bows with overdraws) is determined by drawing an extra-long arrow to full draw and having someone mark the arrow one inch in front of where the arrow contacts the most forward portion of the arrow rest.

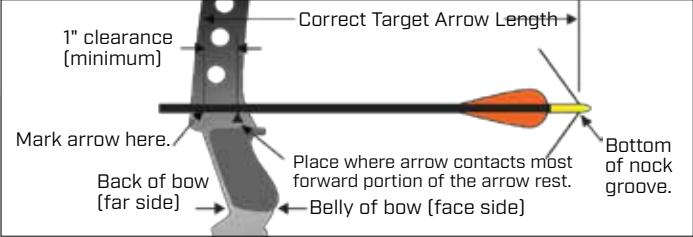

**Bow Draw Length.** Draw length is measured at full draw from the bottom of the nock groove to the back (far side) of the bow. Actual arrow length and draw length are only the same if the end of the arrow shaft is even with the back of the bow (far side) at full draw.

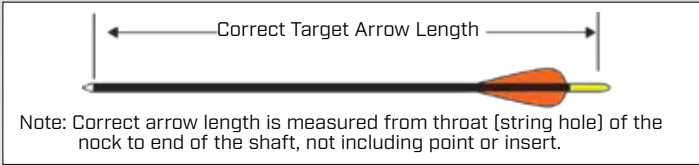

2. Determining Actual Peak Bow Weight Compound Bows

Compound bows must be measured at the peak bow weight as the bow is being drawn and not while letting the bow down.

The suggested shaft sizes in the charts were determined using a "Standard" Setup which includes:

- Use of a release aid
- Compound bow with brace height greater than 60"

If your setup differs from the "Standard" Setup, use the Variables (following) to make adjustments to determine the Calculated Peak Bow Weight so the correct arrow size can be selected on the chart.

Variables to the "Standard" Setup for Compound Bows

- Point weight over 100 gr.-Add 3 lbs. for each 25 gr. heavier than 100 gr.
- Bows with brace heights less than 60"-Add 5 lbs.
- Finger release-Add 5 lbs.

Overdraw Compound Bows

If you are using an overdraw, make the variable calculations (if any), and then modify the Calculated Peak Bow Weight of your bow using the chart below.

**Length of OverDraw**  
For 50#-70# Actual/Calculated Peak Bow Weight, add to bow weight - 1# 2" 3" 4" 5" 1# 3# 6# 9# 12#

DETERMINING ACTUAL PEAK BOW WEIGHT RECURVE AND MODERN LONGBOWS

Your local archery pro shop is the best place to determine the actual draw weight of your bow. Actual Peak Bow Weight for recurve bows and longbows should be measured at your draw length.

LOW POUNDAGE RECURVE BOW <small>Bow Weight—lbs. Finger Release</small>	YOUR ARROW LENGTH						
	21"	22"	23"	24"	25"	26"	27"
16–20 lbs. (7.3–9.1 kg)	Y1 Y1 Y2 Y3 Y4						
20–24 lbs. (9.1–10.9 kg)	Y1 Y1 Y2 Y3 Y4 Y5						
24–28 lbs. (10.9–12.7 kg)	Y1	Y1	Y2	Y3	Y4	Y5	Y6
28–32 lbs. (12.7–14.5 kg)	Y1	Y2	Y3	Y4	Y5	Y6	Y7
32–36 lbs. (14.5–16.3 kg)	Y2	Y3	Y4	Y5	Y6	Y7	
36–40 lbs. (16.3–18.1 kg)	Y3	Y4	Y5	Y6	Y7		

Note: If your arrow shaft is longer than inch length shown, round-up to the next longer increment.

Size	Spine	Model	Weight Grs/Inch	Size	Spine	Model	Weight Grs/Inch
Group Y1				Group Y2			
2000	2.000	Inspire	3.4	1800	1.800	Inspire	3.6
1214	2.501	75	5.9	1413	2.036	75	5.9
2000	2.000	Avance	3.4	1800	1.800	Avance	3.6
2000	2.000	Sport	3.4	1800	1.800	Sport	3.6

Group Y3				Group Y4			
1600	1.600	Inspire	3.8	1400	1.400	Inspire	3.9
1416	1.684	75	7.2	1400	1.400	Vector	3.9
1600	1.600	Avance	3.8	1416	1.684	75	7.2
1600	1.600	Sport	3.8	1400	1.400	Avance	4.2
				1400	1.400	Sport	4.2

Group Y5				Group Y6			
1250	1.250	A/C/E	5.1	1250	1.250	A/C/E	5.1
1200	1.200	Inspire	7.2	1150	1.150	PRO	5.5
1400	1.400	Vector	3.9	1200	1.200	Inspire	7.2
1514	1.379	X7	6.8	1000	1.000	Vector	5.0
1516	1.403	75	7.3	1516	1.403	75	7.3
1400	1.400	Avance	4.2	1614	1.403	X7	7.7
1400	1.400	Sport	4.2	1150	1.150	Avance	4.9
				1150	1.150	Sport	4.9

Group Y7				KEY	
1000	1.000	A/C/E	5.7	<b>PRO</b>	ProComp
1000	1.100	PRO	5.5	<b>A/C/E</b>	Aluminum/Carbon/Extreme
1000	1.000	X10	5.3	<b>X10</b>	X10 Shafts (Aluminum/Carbon)
1000	1.000	Inspire	7.2	<b>Inspire</b>	Carbon Inspire
1000	1.000	Vector	5.0	<b>Vector</b>	Carbon Vector
1614	1.153	X7	7.7	<b>X7</b>	X7 Edipse (7178 alloy)
1616	1.079	75	8.4	<b>75</b>	XX75: Platinum Plus,Tribute, Jazz and Neos (7075 alloy)
1000	1.000	Avance	4.9	<b>Avance</b>	Avance
1000	1.000	Sport	4.9	<b>Sport</b>	Avance Sport



COMPOUND BOW – Release Aid Calculated Peak Bow Weight–lbs

YOUR ARROW

LENGTH FOR TARGET • FIELD • 3D

RECURVE BOW

Bow Rating - up to 275 FPS	Bow Rating - 276–300 FPS	Bow Rating - 301–320 FPS	Bow Rating - 321–340 FPS	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	Bow Weight–lbs. - Finger Release
29–35 lbs. (13.2–15.9 kg)				00	01	02	03	T1	T2	T3				21–27 lbs. (9.5–12.2 kg)
35–40 lbs. (15.9–18.1 kg)	29–35 lbs. (13.2–15.9 kg)			01	02	03	T1	T2	T3	T4	T5			27–32lbs. (12.2–14.5 kg)
40–45 lbs. (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)	29–35 lbs. (13.2–15.9 kg)		02	03	T1	T2	T3	T4	T5	T6	T7		32–36 lbs. (14.5–16.3 kg)
45–50 lbs. (20.4–22.7 kg)	40–45 lbs (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)		03	T1	T2	T3	T4	T5	T6	T7	T8	T9	36–40 lbs. (16.3–18.1 kg)
50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	40–45 lbs. (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	40–44 lbs (18.1–20.0 kg)
55–60 lbs (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	40–45 lbs. (18.1–20.4 kg)	T2	T3	T4	T5	T6	T7	T8	T9	T10	T11	44–48 lbs. (20.0–21.8 kg)
60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	T3	T4	T5	T6	T7	T8	T9	T10	T11	T12	48–52 lbs (21.8–23.6 kg)
65–70 lbs (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	T4	T5	T6	T7	T8	T9	T10	T11	T12	T13	53–57 lbs (24.0–25.9 kg)
70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	T5	T6	T7	T8	T9	T10	T11	T12	T13	T13	58–62 lbs. (26.3–28.1 kg)
76–82 lbs (34.5–37.2 kg)	70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	T6	T7	T8	T9	T10	T11	T12	T13	T13	T14	63–67 lbs. (28.6–30.4 kg)
82–88 lbs. (37.2–39.9 kg)	76–82 lbs (34.5–37.2 kg)	70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	T7	T8	T9	T10	T11	T12	T13	T13	T14		68–73 lbs. (30.8–33.1 kg)

For ATA Speed of 341–350 FPS: Start in 321–340 FPS column, drop down one row in chart:      Examples:      58lb–31in–345 FPS: drops down one row, still in Group T13  
46lb–28in–345 FPS: drops down one row, shift from Group T8 to Group T9

For ATA Speed of 351+ FPS: Start in 321–340 FPS column, drop down two rows in chart:      Examples:      59lb–31in–355 FPS: drops down two rows, shift from Group T13 to Group T14  
47lb–28in–355 FPS: drops down two rows, shift from Group T8 to Group T10

Size	Spine	Model	Weight Grs/ inch	Size	Spine	Model	Weight Grs/ inch	Size	Spine	Model	Weight Grs/ inch	Size	Spine	Model	Weight Grs/ inch
Group 00				Group 01				Group 02				Group 03			
1800	1.800	Inspire	3.6	1600	1.600	Inspire	3.8	1400	1.400	Avance	4.2	1100	1.100	A/C/E	5.1
1214	2.501	75	5.9	1416	1.684	75	7.1	1400	1.400	Inspire	4.2	1200	1.200	Inspire	7.2
1413	2.036	75	5.9	1516	1.403	75	7.3	1400	1.400	Inspire	4.2	1150	1.150	Avance	4.7
1800	1.800	Avance	3.4	1600	1.600	Avance	3.8	1400	1.400	Vector	3.9	1000	1.000	Vector	5.0
								1514	1.379	X7	6.8	1614	1.153	X7	7.7
								1150	1.150	PRO	5.5	1000	1.000	PRO	5.5
Group T3				Group T4				Group T5				Group T6			
*720-780R	0.720-0.780	A/C/E	6.4	*670-720R	0.670-0.720	A/C/E	5.9	*620-670R	0.620-0.670	A/C/E	6.1	*570-620R	0.570-0.620	A/C/E	6.3
*700-750R	0.700-0.750	X10	6.7	*650-700R	0.650-0.700	X10	6.8	*600-650R	0.600-0.650	X10	7.0	*550-600R	0.550-0.600	X10	7.5
720	0.720	ProTour	6.2	670	0.670	ProTour	6.5	620	0.620	ProTour	6.7	570	0.570	ProTour	6.9
750	0.750	Inspire	8.1	630	0.630	Inspire	7.9	630	0.630	Inspire	7.9	570	0.570	Inspire	8.2
840	0.840	Apollo	6.5	740	0.740	Apollo	7.2	2013	0.610	75	9.0	610	0.610	Apollo	8.1
1813	0.874	75	7.9	1913	0.733	75	8.3	1914	0.658	X7	9.3	2013	0.610	75	9.0
1814	0.799	X7	8.6	1914	0.658	X7	9.3	1916	0.623	75	10.0	2014	0.579	X7	9.6
1816	0.756	75	9.3	660	0.660	Avance	6.2	660	0.660	Avance	6.2	1916	0.623	75	10.1
730	0.730	Avance	5.0	660	0.660	Pro	6.9	RX7-21	0.525	RX7	9.3	600	0.600	Avance	6.5
710	0.710	PRO	6.5					610	0.660	PRO	7.3	475	0.475	SDRIVE 23	6.4
												500	0.500	HSPEED	6.9
												570	0.570	PRO	6.6
												RX7-21	0.525	RX7	9.3
												480	0.480	SDRIVE 19	7.0
Group T9				Group T10				Group T11				Group T12			
*430-470R	0.430-0.470	A/C/E	7.0	*400-430R	0.400-0.430	A/C/E	7.5	*370-400R	0.370-0.400	A/C/E	7.9	370R	0.370	A/C/E	7.9
*410-450R	0.410-0.450	X10	8.5	*380-410R	0.380-0.410	X10	8.9	380R	0.380	X10	8.9	350R	0.350	X10	8.4
420	0.420	ProTour	8.0	2413	0.365	X7, 75	10.5	380	0.380	ProTour	8.4	340	0.340	ProTour	8.8
2311	0.450	X7	8.9	2214	0.425	X7	10.4	290	0.290	SDRIVE 25	7.8	290	0.290	SDRIVE 25	7.8
2312	0.423	X7	9.5	2314	0.390	X7, 75	10.8	2413	0.365	X7, 75	10.5	350	0.350	X7	8.4
2213	0.460	X7, 75	9.9	2412	0.400	X7	9.7	2314	0.390	X7, 75	10.8	2511	0.348	X7	9.6
2214	0.425	X7	10.4	375	0.375	SDRIVE 23	6.9	2315	0.340	X7, 75	11.8	2512	0.321	X7	10.3
2115	0.461	75	10.8	400	0.400	HSPEED	7.4	2511	0.348	X7	9.6	2612	0.285	X7	10.7
375	0.375	SDRIVE 23	6.9	380	0.380	PRO	8.9	375	0.375	SDRIVE 23	6.9	2613	0.265	X7	11.5
400	0.400	HSPEED	7.4	RX7-23	0.420	RX7	10.4	340	0.340	HSPEED	7.4	2712	0.260	X7	11.3
420	0.420	PRO	7.8	380	0.380	SDRIVE 19	7.8	380	0.380	PRO	8.9	325	0.325	SDRIVE 23	7.4
RX7-23	0.420	RX7	10.4	400	0.400	Avance	8.1	380	0.380	SDRIVE 19	7.8	340	0.340	HSPEED	8.2
380	0.380	SDRIVE 19	7.8	400	0.400	Matrix	7.4	340	0.340	Avance	8.8	340	0.340	PRO	8.9
450	0.450	Avance	7.5					340	0.340	Matrix	8.1	300	0.300	PRO	9.6
400	0.400	Matrix	7.4									330	0.330	SDRIVE 19	8.4
												340	0.340	Avance	8.8
												340	0.340	Matrix	8.1

Size	Spine	Model	Weight Grs/ inch	Size	Spine	Model	Weight Grs/ inch
Group T1				Group T2			
*920-1000R	0.920-1.000	A/C/E	5.8	*780-850R	0.780-0.850	A/C/E	6.0
*900-1000R	0.900-1.000	X10	5.8	*750-830R	0.750-0.830	X10	6.4
880		PRO	5.9	770	0.770	ProTour	6.0
2L–04	1.020	A/C/C	6.1	2–04	0.920	A/C/C	6.5
2–04	0.920	A/C/C	6.5	810	0.810	Avance	5.4
1000	1.000	Avance	4.6	900	0.900	Inspire	7.7
1000	1.000	Inspire	7.2	1714	0.963	X7	8.1
1000	1.000	Vector	5.0	1716	0.880	75	9.0
1713	1.044	75	7.4	810	0.810	PRO	6.1
1714	0.963	X7	8.1				
1616	1.079	75	8.4				
Group T7				Group T8			
*520-570R	0.520-0.570	A/C/E	6.7	*470-520R	0.470-0.520	A/C/E	6.8
*500-550R	0.500-0.550	X10	7.8	*450-500R	0.450-0.500	X10	8.1
520	0.520	ProTour	7.3	470	0.470	ProTour	7.6
3–18	0.560	A/C/C	7.8	3–28	0.500	A/C/C	8.1
3–28	0.500	A/C/C	8.1	3–39	0.440	A/C/C	8.6
530	0.530	FMJMatch	8.4	490	0.490	FMJMatch	8.9
2212	0.505	X7	8.8	2212	0.505	X7	8.8
2114	0.510	X7, 75	9.9	2213	0.460	X7, 75	9.9
550	0.550	Avance	6.7	2114	0.510	X7, 75	9.9
2016	0.531	75	10.6	475	0.475	SDRIVE 23	6.4
475	0.475	SDRIVE 23	6.4	500	0.500	HSPEED	6.9
500	0.500	HSPEED	6.9	470	0.470	PRO	7.3
520	0.520	PRO	7.0	RX7-23	0.420	RX7	10.4
RX7-22	0.475	RX7	9.7	480	0.480	SDRIVE 19	7.0
Group T13				Group T14			
325R	0.325	X10	8.8	270	0.270	SDRIVE 27	9.0
290	0.290	SDRIVE 25	7.8	2613	0.265	X7	11.5
270	0.270	SDRIVE 27	9.0	2712	0.260	X7	11.3
2512	0.321	X7	10.3	250	0.250	Matrix	2.4
2612	0.285	X7	10.7				
325	0.325	SDRIVE 23	7.4				
300	0.300	HSPEED	8.2				
300	0.300	PRO	9.6				
330	0.330	SDRIVE 19	8.4				
300	0.300	Avance	8.8				

Every effort has been made to ensure the accuracy of this Product Guide. Graphics and images are for illustration purposes only. Due to on-going efforts to improve our products, Easton reserves the right to make changes without notice. 2021 products available for sale on or after December 1, 2020.

KEY

\* When two sizes are listed together, the weight listed is for the first shaft

X10	X10
ProTour	ProTour
A/C/E	ACE
PRO	ProComp
HSPEED	Hyperspeed
6.5 Matrix	Matrix
Avance +Sport	Avance
Inspire	Inspire
SDRIVE 27	Super Drive 27
SDRIVE 25	Super Drive 25
SDRIVE 23	Super Drive 23
SDRIVE 19	Super Drive 19
75	Platinum Plus, Tribute, Jazz and Neos (7075 alloy)
RX7	RX7
X7	Eclips

R	The size recommendations for recurve bows are indicated with a letter “R” next to the size.
Size	Indicates suggested arrow size
Spine	Spine of arrow size shown (static) ATA standard
Model	Designates arrow model
Weight	Listed in grains per inch average for barrelled or tapered shafts

TARGET SHAFT MODELS



Aluminum/Carbon	Pg #	Materials/Construction	Inserts	Points	Nock Sys-tem	Nock Type	Weight Tolerance <sup>4</sup>	Straight-ness <sup>1</sup>	Color/Finish	Sizes
X10™	2	High-strength carbon fiber bonded to a precision 7075 alloy core tube —barreled shaft	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10	Pin Nocks X10 Overnock	±0.5 grains	±.0015"	Polished Black Carbon	1000, 900, 830, 750, 700, 650, 600, 550, 500, 450, 410, 380, 350,325
X10™ PROTOUR™	3	High-strength carbon fiber bonded to a precision 7075 alloy core tube —single-taper shaft	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10	Pin Nocks	±0.5 grains	±.0015"	Polished Black Carbon	770, 720, 670, 620, 570, 520, 470, 420, 380, 340
A/C/E°	4	High-strength carbon fiber bonded to a precision 7075 alloy core tube —barreled shaft	N/A	4MM HL	4MM	Pin Nocks or Direct Fit	±0.5 grains	±.0015"	Polished Black Carbon	(1250, 1100) <sup>5</sup> , 1000, 920, 850, 780, 720, 670, 620, 570, 520, 470, 430, 400, 370
PROCOMP™	5	High-strength carbon fiber bonded to a precision 7075 alloy core tube —parallel shaft	N/A	4MM HL	4MM	Pin Nocks or Direct Fit	±0.5 grains	±.0015"	Polished Black Carbon	1150, 1000, 880, 810, 710, 660, 610, 570, 520, 470, 420, 380, 340, 300, 250

Carbon	Pg #	Materials/Construction	Inserts	Points	Nock Sys-tem	Nock Type	Weight Tolerance <sup>4</sup>	Straight-ness <sup>2</sup>	Color/Finish	Sizes
AVANCE™	6	Uniform Spine Acu-Carbon	NA	4MM ML	4MM	Pin Nocks or Direct Fit	NA	±.0025	Black, Smooth-matte Finish	340, 400, 450, 500, 550, 600, 660, 730, 810, 900, 1000, 1150 1400, 1600, 1800, 2000
AVANCE SPORT™	7	Uniform Spine Acu-Carbon	NA	4MM ML	4MM	Pin Nocks or Direct Fit	NA	±.005	Black, Smooth-matte Finish	340, 400, 450, 500, 550, 600, 660, 730, 810, 900, 1000, 1150 1400, 1600, 1800, 2000
INSPIRE™	8	Small diameter pultruded carbon	NA	4MM Zinc 5MM Zinc	4MM 5MM	Direct Fit	NA	NA	Black, Smooth-matte Finish	2000, 1800,1600,1400, 1200, 1000, 900, 750, 630, 570
SUPERDRIVE 19™	9	Multi-layer wrapped Carbon fiber	NA	One-piece	4MM,or G Pin Nock	Pin Nocks or Direct Fit	±1 grains	±.002"	Black, Smooth-matte Finish	460, 380, 330
SUPERDRIVE 23™	10	Multi-layer wrapped Carbon fiber	40 gr.	One-piece	4MM 6.5MM	Pin Nocks or Direct Fit	±1 grains	±.003"	Black, Smooth-matte Finish	475, 375, 325
SUPERDRIVE 25™	11	Multi-layer wrapped Carbon fiber	50 gr.	One-piece	4MM 6.5MM	Pin Nocks or Direct Fit	±1 grains	±.002"	Black, Smooth-matte Finish	290
SUPERDRIVE 27™ SUPERDRIVE 27™ PRO	12	Multi-layer wrapped Carbon fiber	NA	One-piece	4MM 6.5MM	Pin Nocks or Direct Fit	NA	±.005" ±.002"	Black, Smooth-matte Finish	270
6.5 MATRIX™/ MATCH GRADE	14	Uniform Spine Acu-Carbon	25 gr.	6.5MM Target	6.5MM	Direct Fit	NA	±.003" Pro ±.001"	Black, Smooth-matte Finish	250, 300, 340, 400, 500

Aluminum	Pg #	Aero-space Alloy	Strength <sup>3</sup> (psi)	Inserts	Points	Nock Sys-tem	Nock Type	Weight Tolerance <sup>4</sup>	Straight-ness <sup>1</sup>	Color/Finish	Sizes
RX7™	13	7178-T9	105,000	NA	NIBB or One-piece Bullet	6.5MM	Direct Fit	±3/4%	+ .001"	Hard-Anodized Silver and Blue	23-420, 22-475, 21-525
X <sup>2</sup> 3™ X <sup>2</sup> 7™	16	7178-T9	105,000	RPS Insert	NIBB or One-piece Bullet	6.5MM	Direct Fit	±3/4%	+ .001"	Hard-Anodized Silver and Black	2712, 2312, 2314, 2315, 2318
ECLIPSE™	18	7178-T9	105,000	N/A	NIBB or One-piece Bullet	4MM 6.5MM	Direct Fit	±3/4%	±.001"	Hard-Anodized Polished Black	<i>1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2612, 2613, 2712</i>
GENESIS™	22	7075	90,000	N/A	One-piece Point	4MM N Nock	Direct Fit	±2.5 grains	±.005"	Hard-Anodized Bright Blue, Orange, Black	1820
XX75 PLATINUM® PLUS	19	7075-T9	96,000	RPS Insert	NIBB, One-piece Bullet, or RPS Point	4MM 6.5MM	Direct Fit	±1%	±.002"	Hard-Anodized Platinum Grey	<i>1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315</i>
JAZZ®	20	7075	90,000	RPS Insert 1716 & up	NIBB, One-piece Bullet, or RPS Point	Full-Diameter Taper Swage	Conventional	±2%	±.005"	Hard-Anodized Purple/Silver	1214 <sup>6</sup> , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
TRIBUTE™	21	7075	90,000	RPS Insert 1716 & up	NIBB, One-Piece Bullet or RPS Point	Full-Diameter Taper Swag	Conventional	±2%	±.005"	Hard-Anodized Black	1214 <sup>6</sup> , 1413, 1416, 1516 1616, 1716, 1816,1916, 2016
NEOS™	23	7075	90,000	N/A	One-piece Point	Full-Diameter Taper Swage	Conventional	±5%	±.008"	Hard-Anodized Gold	1618

<sup>1</sup> Guaranteed straight to more stringent standards than ATA/ASTM methods.

<sup>2</sup> Guaranteed to meet or exceed similar carbon-industry straightness specifications.

<sup>3</sup> Tensile strength value may vary ±3%.

<sup>4</sup> Grains-per-shafts in a dozen bundle.

<sup>5</sup> Special order only.

<sup>6</sup> 1214 size Jazz uses direct-fit G Nock.

Eclipse and Platinum Plus sizes in italics use UNI System and G Nock.

®/™ Registered Trademark of Easton.

**LIMITED WARRANTY**  
The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see [www.eastonarchery.com](http://www.eastonarchery.com).

**ARCHERY EXPERTS**  
For more information on arrow preparation and assembly, visit: [WWW.EASTONARCHERY.COM](http://WWW.EASTONARCHERY.COM)

 **WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE AT [WWW.BSAFE.WS](http://WWW.BSAFE.WS) OR 877-INFO-ETP (877-463-6387).**

CHECK EVERY ARROW, EVERY SHOT

**ARROW DAMAGE**  
Any arrow could be damaged, even when new. A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. Damage to an arrow shaft, or any of its components, may occur from improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. ***WARNING! NEVER SHOOT A DAMAGED ARROW.***

**ARROW USE PRECAUTIONS**  
Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection information at [www.eastonarchery.com/warning-use/](http://www.eastonarchery.com/warning-use/)). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, DISCARD THE ARROW. ***WARNING! NEVER SHOOT A DAMAGED ARROW.***

A loose or damaged nock may indicate a damaged arrow shaft or otherwise be dangerous. Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose or is damaged, DISCARD THE ARROW. ***WARNING! NEVER SHOOT AN ARROW WITH A LOOSE OR DAMAGED NOCK.***

**BOW INSPECTION**  
Before shooting any arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at [www.eastonarchery.com/shaft-selector/](http://www.eastonarchery.com/shaft-selector/)). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage. ***WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.***

ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:

1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel, look and listen for cracking (Figure 1). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged, DISCARD THE ARROW. ***WARNING! NEVER SHOOT A DAMAGED ARROW.***

2. While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (Figure 2). If the arrow “relaxes” or twists easily, the carbon has been damaged. DISCARD THE ARROW. ***WARNING! NEVER SHOOT A DAMAGED ARROW.*** A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. ***WARNING! NEVER SHOOT A DAMAGED ARROW.***



**CARBON ARROW CUTTING**  
Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

**SOLVENTS**  
CAUTION: When removing fletchings, or for any other reason, do not soak any carbon arrow shaft in solvents. This can weaken the resin that bonds the carbon fibers. (For directions on arrow set up, refer to the the Easton Tuning Guide.) ***WARNING! NEVER SHOOT A DAMAGED ARROW.***

***To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.***

 **WARNING:** Cancer and Reproductive Harm — [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Some of the products listed in this Product Guide may be subject to California Proposition 65 warnings requirements. See product packaging or website for specific warning information. This Product Guide is intended for informational purposes only, not a solicitation for product sales.



[EASTONARCHERY.COM](http://EASTONARCHERY.COM)