

An advertisement for Easton's 2024 hunting season. The background is a composite image. The upper right shows a hunter in camouflage gear and a hat, carrying a large compound bow over his shoulder, walking through tall, golden grass on a hillside. The lower left shows a silhouette of a hunter holding a bow, standing next to a large deer with prominent antlers. A large, glowing orange circular graphic with concentric rings and radial lines, resembling a target or a compass, is overlaid on the left side of the image. The Easton logo and the text '2024 HUNTING' are centered in the middle of the image.

**EASTON**

2024 HUNTING



## MATCH GRADE PRO SHOP SERIES

**PRO SHOP EXCLUSIVE** – Match Grade arrows epitomize quality in every way. Crafted with meticulous care in the USA, each arrow is a testament to our unwavering commitment to excellence. From the selection of materials to the intricacy of design, no detail is overlooked. With an unrelenting focus on accuracy, these arrows instill rock-solid confidence each time you draw your bow. Make the most out of your next shot, pick up a dozen Match Grade arrows at your authorized Easton pro shop. Available on FMJ, AXIS, Sonic 6.0, and Easton 6.5 models.

## FIVE-POINT STRAIGHTNESS CHECK $\pm .001"$

The exclusive five-point straightness standard goes beyond the center-only industry standard measurement. Every Match Grade shaft is straightness checked at each end, the center, and at the critical quarter locations. A five-point check ensures every Match Grade arrow leaves the USA factory with the highest level of quality.

## PREMIUM COMPONENTS

Precision engineering and unmatched tolerances combine with the highest specific strength alloys and to create the toughest, match-precise front-end insert systems ever from Easton. Titanium, steel, and aluminum combinations allow custom weight and FOC setups. Patent pending half-outs are available in four weight options.

Included

5MM Match Grade HIT Collar



15gr. Steel Collar

4MM Match Grade Half-out



55 gr. Aluminum Collar/Aluminum Post

Sold Separately

4MM Match Grade Half-out



75 gr. Steel Collar/Aluminum Post




100 gr. Steel Collar/Titanium Post



150 gr. Steel Collar/Steel Post

## SUPERIOR AAE™ HYBRID 26™ HELICAL FLETCHING

Easton's exclusive, custom-quality factory fletching process places each AAE Hybrid Vane at a precise helical alignment for immediate broadhead stabilization with a quiet, efficient flight downrange.

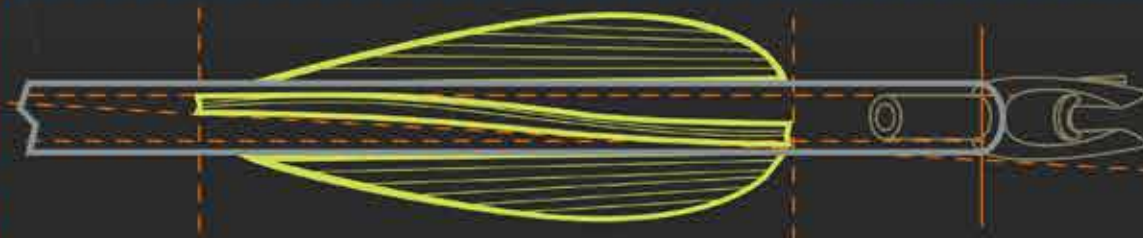

Single-color helical three-fletched in white, flo yellow or fire orange.



White



Flo Yellow



Fire Orange



4MM FULL METAL JACKET™

4mm micro-diameter carbon core with 7075 alloy metal jacket  
Pre-installed 4mm Microlite™ nocks  
AAE™ Hybrid 26™ helical fletched vanes  
8-32 4MM Match Grade aluminum half-out inserts included for optimum FOC for hunting  
Straightness ± .001”  
Pro Shop exclusive



INCLUDED



4MM Match Grade Aluminum Half-out  
[55 grains] Uses 8-32 thread 5/16” field points



4mm Microlite™ Nock  
[6 grains]

NEW

MATCH GRADE HALF-OUTS

Weight (Grains)

Patent pending.  
Uses 8-32 thread 5/16” field points.

ALUMINUM/ ALUMINUM

55

INCLUDED

ALUMINUM/STEEL

75

SOLD SEPARATELY

TITANIUM/STEEL

100

SOLD SEPARATELY

STEEL/STEEL

150

SOLD SEPARATELY

SOLD SEPARATELY



4MM Nock Collar  
[3 gr.]



8-32 Match Grade Point  
[100, & 125 grains]



8-32 Multi Point  
[100, & 125 grains]



Deep Six™ Steel Field Points  
[100 grains]



4MM Titanium Half-out  
[55 grains] Uses 8-32 thread 5/16” field points



4MM Steel Half-out  
[95 grains] Uses 8-32 thread 5/16” field points



4MM (G) Deep Six™ Steel HIT Insert  
[20 grains] See chart for field point size.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	8-32 FIELD POINT	O.D.	4MM HALFOUT	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	100 Grains (optional)	Inches	Inches	Size	Size
250*	12.3	0.250	33	DP6-6	5/16	0.247	#5	#8
300*	11.7	0.300	32.5	DP6-6	5/16	0.244	#4	#7
340	11.0	0.340	32	DP6-5	5/16	0.240	#3	#6
400	9.8	0.400	31.5	DP6-5	5/16	0.234	#2	#5

\*Fletched six-pack arrows are 32” max stock length.

4MM FULL METAL JACKET™

4mm micro-diameter carbon core with 7075 alloy metal jacket  
Pre-installed 4mm Microlite™ nocks  
8-32 4MM aluminum half-out inserts included for optimum FOC for hunting  
Straightness ± .001”



INCLUDED



4MM 8-32 Aluminum Half-out  
[50 grains] Uses 8-32 thread 5/16” field points



4mm Microlite™ Nock  
[6 grains]

NEW

MATCH GRADE HALF-OUTS

Weight (Grains)

Patent pending.  
Uses 8-32 thread 5/16” field points.

ALUMINUM/ALUMINUM

55

SOLD SEPARATELY

ALUMINUM/STEEL

75

SOLD SEPARATELY

TITANIUM/STEEL

100

SOLD SEPARATELY

STEEL/STEEL

150

SOLD SEPARATELY

SOLD SEPARATELY



4MM Nock Collar  
[3 gr.]



8-32 Match Grade Point  
[100, & 125 grains]



8-32 Multi Point  
[100, & 125 grains]



Deep Six™ Steel Field Points  
[100 grains]



4MM Titanium Half-out  
[55 grains] Uses 8-32 thread 5/16” field points



4MM Steel Half-out  
[95 grains] Uses 8-32 thread 5/16” field points



4MM (G) Deep Six™ Steel HIT Insert  
[20 grains] See chart for field point size.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	8-32 FIELD POINT	O.D.	4MM HALFOUT	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	100 Grains (optional)	Inches	Inches	Size	Size
250*	12.3	0.250	33	DP6-6	5/16	0.247	#5	#8
300*	11.7	0.300	32.5	DP6-6	5/16	0.244	#4	#7
340	11.0	0.340	32	DP6-5	5/16	0.240	#3	#6
400	9.8	0.400	31.5	DP6-5	5/16	0.234	#2	#5

\*Fletched six-pack arrows are 32” max stock length.

5MM FULL METAL JACKET™

5mm small-diameter carbon core with 7075-alloy metal jacket  
Pre-installed 5mm (X) nocks  
AAE™ Hybrid 26™ helical fletched vanes  
5MM HIT 8-32 inserts included  
Straightness ± .001”  
Pro Shop exclusive



INCLUDED



5MM HIT® Insert  
[16 grains] See chart for field point size.



5MM X Nock™  
[9 grains]

NEW



Match Grade HIT Collar  
[13-21 grains] Uses 8-32 thread 5/16” field points

SOLD SEPARATELY



8-32 Match Grade Point  
[100, & 125 grains]



8-32 Multi Point  
[100, & 125 grains]



5MM Steel 8-32 Half-out  
[75 grains] Uses 8-32 thread 5/16” field points



5MM Aluminum 8-32 Half-out  
[25 grains] Uses 8-32 thread 5/16” field points



5MM Brass HIT® Break-off  
8-32 Insert  
[Adjustable to 75-50 grains]  
See chart for field point size.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR	O.D.	HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size	Inches	Size
250*	11.5	0.250	33	9/32	3	0.273	#2
300*	12.0	0.300	32.5	9/32	4	0.273	#2
340	11.3	0.340	32	9/32	3	0.269	#2
400	10.2	0.400	31.5	17/64	2	0.263	#2
500	9.1	0.500	31	17/64	1	0.256	#1

\*Fletched six-pack arrows are 32” max stock length.

5MM FULL METAL JACKET™

+DANGEROUS GAME

5mm small-diameter carbon core with 7075-alloy metal jacket  
Pre-installed 5mm (X) nocks  
5MM HIT 8-32 inserts or 5MM aluminum half-out included  
Straightness ± .001”



INCLUDED



5MM HIT® Insert  
[16 grains]  
See chart for field point size.



5MM X Nock™  
[9 grains]



5MM Aluminum 8-32 Half-out  
[25 grains] Uses 8-32 thread 5/16” field points

SOLD SEPARATELY



8-32 Match Grade Point  
[100, & 125 grains]



8-32 Multi Point  
[100, & 125 grains]



5MM Steel 8-32 Half-out  
[75 grains] Uses 8-32 thread 5/16” field points



5MM Brass HIT® Break-off  
8-32 Insert  
[Adjustable to 75-50 grains]  
See chart for field point size.

NEW



Match Grade HIT Collar  
[13-21 grains] Uses 8-32 thread 5/16” field points

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR	O.D.	HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size	Inches	Size
250**	17.7	0.250	32.5	19/64	NA	0.290	NA
250*	11.5	0.250	33	9/32	3	0.273	#2
300*	12.0	0.300	32.5	9/32	4	0.273	#2
340	11.3	0.340	32	9/32	3	0.269	#2
400	10.2	0.400	31.5	17/64	2	0.263	#2
500	9.1	0.500	31	17/64	1	0.256	#1

\*\* Dangerous Game

\*Fletched six-pack arrows are 32” max stock length.

MATCH GRADE PRO SHOP SERIES

4MM AXIS™ LONG RANGE

4MM micro-diameter uniform ACU-CARBON fiber construction  
Pre-installed 4MM Microlite™ nocks  
AAE™ Hybrid 26™ helical fletched vanes  
8-32 4MM Match Grade aluminum half-out included for optimum hunting FOC  
Straightness: ± .001”  
Pro Shop exclusive



INCLUDED



4MM Match Grade Half-out  
(55 grains) Uses 8-32 thread 5/16” field points



4MM Microlite™ Nock  
(6 grains)

NEW

MATCH GRADE HALF-OUTS

Weight (Grains)		Patent pending. Uses 8-32 thread 5/16” field points.
	ALUMINUM/ALUMINUM	
55		INCLUDED
	ALUMINUM/STEEL	
75		SOLD SEPARATELY
	TITANIUM/STEEL	
100		SOLD SEPARATELY
	STEEL/STEEL	
150		SOLD SEPARATELY

SOLD SEPARATELY



4MM Nock Collar  
(3 gr.)



8-32 Match Grade Point  
(100, & 125 grains)



8-32 Multi Point  
(100, & 125 grains)



Deep Six™ Steel Field Points  
(100 grains)



4MM Steel Half-out  
(95 grains) Uses 8-32 thread 5/16” field points



4MM Titanium Half-out  
(55 grains) Uses 8-32 thread 5/16” field points



4MM Deep Six™ Steel HIT Insert  
(20 grains) See chart for field point size.



4MM AXIS™ LONG RANGE

4MM micro-diameter uniform ACU-CARBON fiber construction  
Pre-installed 4MM Microlite™ nocks  
8-32 4MM aluminum half-out included for optimum hunting FOC  
Straightness: ± .003”



INCLUDED



4MM 8-32 Aluminum Half-out  
(50 grains) Uses 8-32 thread 5/16” field points



4MM Microlite™ Nock  
(6 grains)

NEW

MATCH GRADE HALF-OUTS

Weight (Grains)		Patent pending. Uses 8-32 thread 5/16” field points.
	ALUMINUM/ALUMINUM	
55		SOLD SEPARATELY
	ALUMINUM/STEEL	
75		SOLD SEPARATELY
	TITANIUM/STEEL	
100		SOLD SEPARATELY
	STEEL/STEEL	
150		SOLD SEPARATELY

SOLD SEPARATELY



4MM Nock Collar  
(3 gr.)



8-32 Match Grade Point  
(100, 125 & 150 grains)



8-32 Multi Point  
(100, & 125 grains)




Deep Six™ Steel Field Points  
(100 grains)



4MM Steel Half-out  
(95 grains) Uses 8-32 thread 5/16” field points



4MM Titanium Half-out  
(55 grains) Uses 8-32 thread 5/16” field points



4MM Deep Six™ Steel HIT Insert  
(20 grains) See chart for field point size.



AXIS LONG RANGE

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	8-32 FIELD POINT	O.D...	4MM HALFOUT	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	100 Grains (optional)	Inches	Inches	Size	Size
250*	9.8	0.250	33	DP6-6	5/16	0.244	#4	#7
300*	9.3	0.300	32.5	DP6-6	5/16	0.241	#3	#6
340	8.3	0.340	32	DP6-4	5/16	0.234	#2	#5
400	7.6	0.400	31.5	DP6-4	5/16	0.229	#1	#4

\*Fletched six-pack arrows are 32" max stock length.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	8-32 FIELD POINT	O.D.	4MM HALFOUT	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	100 Grains (optional)	Inches	Inches	Size	Size
250*	9.8	0.250	33	DP6-6	5/16	0.244	#4	#7
300*	9.3	0.300	32.5	DP6-6	5/16	0.241	#3	#6
340	8.3	0.340	32	DP6-4	5/16	0.234	#2	#5
400	7.6	0.400	31.5	DP6-4	5/16	0.229	#1	#4

\*Fletched six-pack arrows are 32" max stock length.



MATCH GRADE PRO SHOP SERIES

5MM AXIS™

5MM small-diameter uniform ACU-CARBON  
Pre-installed 5MM (X) nocks  
AAE™ Hybrid 26™ helical fletched vanes  
5MM HIT 8-32 inserts included  
Straightness ± .001"  
Pro Shop exclusive



INCLUDED



5MM HIT® Insert  
[16 grains]  
See chart for field point size.



5MM X Nock™  
[9 grains]



Match Grade HIT Collar  
[13-21 grains]  
Uses 8-32 thread 5/16" field points

SOLD SEPARATELY



8-32 Match Grade Point  
[100, & 125 grains]



8-32 Multi Point  
[100, & 125 grains]



5MM Brass HIT® Break-off  
8-32 Insert  
[Adjustable to 75-50 grains]  
See chart for field point size.



5MM Aluminum 8-32 Half-out  
[25 grains] Uses 8-32 thread 5/16" field points



5MM Steel 8-32 Half-out  
[75 grains] Uses 8-32 thread 5/16" field points

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR	O.D.	5MM HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size	Inches	Size
200*	12	0.200	34"	9/32	#6	0.286	#2
260*	11.5	0.260	34"	9/32	#5	0.280	#2
300*	10.7	0.300	32.5	9/32	#4	0.275	#2
340	9.5	0.340	32	9/32	#3	0.267	#2
400	9.0	0.400	31.5	17/64	#2	0.264	#2
500	8.1	0.500	31	17/64	#1	0.258	#1
600	7.2	0.600	30.5	17/64	#1	0.253	#1

\*Fletched six-pack arrows are 32" max stock length.

5MM AXIS™

5MM small-diameter uniform ACU-CARBON  
Pre-installed 5MM (X) nocks  
Factory helical fletched w/ 2" Blazer Vanes  
5MM HIT 8-32 inserts OR 5MM aluminum half-out included  
Straightness ± .003"



INCLUDED



5MM HIT® Insert  
[16 grains]  
See chart for field point size.



5MM X Nock™  
[9 grains]

OR



5MM Aluminum 8-32 Half-out  
[25 grains]  
Uses 8-32 thread 5/16" field points

SOLD SEPARATELY



8-32 Match Grade Point  
[100, & 125 grains]



8-32 Multi Point  
[100, & 125 grains]



5MM Brass HIT® Break-off  
8-32 Insert  
[Adjustable to 75-50 grains]  
See chart for field point size.



5MM Steel 8-32 Half-out  
[75 grains]  
Uses 8-32 thread 5/16" field points



Match Grade HIT Collar  
[13-21 grains] Uses 8-32 thread 5/16" field points

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR	O.D.	5MM HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size	Inches	Size
200*	12	0.200	34"	9/32	#6	0.286	#2
260*	11.5	0.260	34"	9/32	#5	0.280	#2
300*	10.7	0.300	32.5	9/32	#4	0.275	#2
340	9.5	0.340	32	9/32	#3	0.267	#2
400	9.0	0.400	31.5	17/64	#2	0.264	#2
500	8.1	0.500	31	17/64	#1	0.258	#1
600	7.2	0.600	30.5	17/64	#1	0.253	#1

\*Fletched six-pack arrows are 32" max stock length.

5MM AXIS™  
SPORT

5MM small-diameter uniform ACU-CARBON  
Pre-installed 5MM (X) nocks  
5MM 8-32 aluminum half-out included  
Straightness ± .005"



INCLUDED



5MM X Nock™  
(9 grains)



5MM Aluminum 8-32  
Half-out *Uses 8-32 thread 5/16" field points*  
(25 grains)

SOLD SEPARATELY



8-32 Match Grade Point  
(100, & 125 grains)



8-32 Multi Point  
(100, & 125 grains)



5MM Steel 8-32 Half-out  
(75 grains) *Uses 8-32 thread 5/16" field points*



5MM Brass HIT® Break-off 8-32 Insert  
*(Adjustable to 75-50 grains) See chart for field point size.*



5MM HIT® Insert  
(16 grains)  
*See chart for field point size.*



Match Grade HIT Collar  
(13-21 grains) *Uses 8-32 thread 5/16" field points*

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	8-32 FIELD POINT	MATCH GRADE HIT COLLAR	O.D.	5MM HALF OUT
	GPI	Deflection in Inches	Inches	Inches	Size	Inches	Size
260*	11.5	0.260	34*	9/32	#5	0.280	#2
300*	10.7	0.300	32.5	9/32	#4	0.275	#2
340	9.5	0.340	32	9/32	#3	0.267	#2
400	9.0	0.400	31.5	17/64	#2	0.264	#2
500	8.1	0.500	31	17/64	#1	0.258	#1
600	7.2	0.600	30.5	17/64	#1	0.253	#1

\*Fletched six-pack arrows are 32" max stock length.

X10 PARALLEL PRO™  
NEW

Target shaft precision for hunting  
4MM micro diameter aluminum core with outer carbon layer  
Straightness ± .001"



ALL COMPONENTS  
SOLD SEPARATELY

NEW

MATCH GRADE  
HALF-OUTS

Weight (Grains)

Patent pending.  
*Uses 8-32 thread 5/16" field points.*

55	ALUMINUM/ALUMINUM		SOLD SEPARATELY
75	ALUMINUM/STEEL		SOLD SEPARATELY
100	TITANIUM/STEEL		SOLD SEPARATELY
150	STEEL/STEEL		SOLD SEPARATELY



8-32 Match Grade Point  
(100, & 125 grains)



Deep Six™ Field Point  
(100 Grains)



8-32 Multi Point  
(100, & 125 grains)



4MM Steel Half-out  
(95 grains) *Uses 8-32 thread 5/16" field points*



Titanium Half-out  
(55 grains) *Uses 8-32 thread 5/16" field points*



4MM Deep Six™ Steel HIT Insert  
(20 grains)



4MM Microlite™ Nock  
(6 gr.)



4MM Nock Collar  
(3 gr.)

SIZE	SHAFT WEIGHT	DEFLECTION	O.D.	STOCK LENGTH	4MM HALFOUT	4MM NOCK COLLAR
	GPI	Inches	Inches	Inches	Size	Size
250	10.8	0.250	0.245	34	#4	#7
300	9.5	0.300	0.236	33.63	#2	#5
340	8.9	0.340	0.231	33.63	#1	#4
380	8.3	0.380	0.227	32.62	#1	#4
420	7.8	0.420	0.220	32.63	NA	#4
470	7.3	0.470	0.215	32.63	NA	#3
520	7.0	0.520	0.215	32.63	NA	#2
570	6.6	0.570	0.215	32.63	NA	#3
610	7.3	0.610	0.218	31	NA	#2
660	6.9	0.660	0.215	30.75	NA	#2
710	6.5	0.710	0.213	30.5	NA	#2
810	6.1	0.810	0.209	30	NA	#2
880	5.9	0.880	0.207	29.5	NA	#1
1000	5.5	1.000	0.204	29	NA	#1
1150	5.5	1.150	0.208	28.5	NA	#1

MATCH GRADE PRO SHOP SERIES

SONIC 6.0™

6mm reduced-diameter higher velocity 100% carbon fiber  
Pre-installed 6mm nocks  
AAE™ Hybrid 26™ helical fletched vanes  
6mm ST Inserts included  
Straightness ± .001"  
Made in USA  
Pro Shop exclusive



INCLUDED



6MM ST RPS™ 8-32 Insert  
(18 grains)



6MM H Nock™  
(9 grains)

SOLD SEPARATELY



8-32 Match Grade Point  
(100, & 125 grains)



6MM Brass Break-Off 8-32 Insert  
(Adjustable to 75-50 grains) See chart for field point size.



8-32 Multi Point  
(100, & 125 grains)



6MM Superdrive 19  
Adjustable Point  
(90 gr.)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.	6MM ST INSERT	SD 19 ADJUSTABLE POINT
	GPI	Deflection in Inches	Inches	O.D. Inches	Inches	Size	Size
250*	9.5	0.250	32.5	17/64	0.291	#2	NA
300	8.8	0.300	32	17/64	0.286	#2	NA
340	7.8	0.340	31.5	17/64	0.279	#2	ONE SIZE
400	7.2	0.400	31	9/32	0.275	#1	ONE SIZE
500	6.7	0.500	30.5	9/32	0.273	#1	ONE SIZE
600	5.8	0.600	30.5	9/32	0.268	#1	ONE SIZE

\*Fletched six-pack arrows are 32" max stock length.

SONIC 6.0™

6mm reduced-diameter higher velocity 100% carbon fiber  
Factory helical fletched w/ 2"Blazer Vanes  
Pre-installed 6mm nocks  
6mm ST Inserts included  
Straightness ± .003"  
Made in USA



INCLUDED



6MM ST RPS™ 8-32 Insert  
(18 grains)



6MM H Nock™  
(9 grains)

SOLD SEPARATELY



8-32 Match Grade Point  
(100, & 125 grains)



6MM Brass Break-Off 8-32 Insert  
(Adjustable to 75-50 grains) See chart for field point size.



8-32 Multi Point  
(100, & 125 grains)



6MM Superdrive 19  
Adjustable Point  
(90 gr.)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.	6MM ST INSERT	SD 19 ADJUSTABLE POINT
	GPI	Deflection in Inches	Inches	O.D. Inches	Inches	Size	Size
250*	9.5	0.250	32.5	17/64	0.291	#2	NA
300	8.8	0.300	32	17/64	0.286	#2	NA
340	7.8	0.340	31.5	17/64	0.279	#2	ONE SIZE
400	7.2	0.400	31	9/32	0.275	#1	ONE SIZE
500	6.7	0.500	30.5	9/32	0.273	#1	ONE SIZE
600	5.8	0.600	30.5	9/32	0.268	#1	ONE SIZE

\*Fletched six-pack arrows are 32" max stock length.



MATCH GRADE PRO SHOP SERIES

EASTON 6.5™

6.5MM uniform USA made ACU-CARBON  
Pre-installed 6.5MM Microlite™ nocks  
AAE™ Hybrid 26™ helical fletched vanes  
6.5MM anodized inserts included  
Straightness ± .001”  
Pro Shop exclusive



INCLUDED



6.5MM Microlite™ Nock  
(8 grains)



6.5™ Insert  
(23 grains)  
*Uses 8-32 thread 5/16” field points*

SOLD SEPARATELY



8-32 Match Grade Point  
(100, & 125 grains)



8-32 Multi Point  
(100, & 125 grains)



6.5MM Brass Insert  
(75, 50 grains)  
*See chart for field point size.*

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
250*	10.0	0.250	32.5	5/16	0.301
300*	9.5	0.300	32.25	5/16	0.300
340	9.3	0.340	31.75	5/16	0.298
400	8.4	0.400	31	19/64	0.294
500	7.3	0.500	30.5	19/64	0.287

\*Fletched six-pack arrows are 32” max stock length.



EASTON 6.5™

HUNTER CLASSIC • BOWHUNTER

6.5MM uniform USA made ACU-CARBON  
Pre-installed 6.5MM Microlite™ nocks  
6.5MM inserts included  
**Straightness:**  
HUNTER CLASSIC ± .003”  
BOWHUNTER ± .005”



INCLUDED



6.5MM Microlite™ Nock  
(8 grains)



6.5™ Insert (Hunter Classic)  
(23 grains) *Uses 8-32 thread 5/16” field points*



6.5™ Insert (Bowhunter)  
(23 grains) *Uses 8-32 thread 5/16” field points*

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
250*	10.0	0.250	32.5	5/16	0.301
300*	9.5	0.300	32.25	5/16	0.300
340	9.3	0.340	31.75	5/16	0.298
400	8.4	0.400	31	19/64	0.294
500	7.3	0.500	30.5	19/64	0.287

\*Fletched six-pack arrows are 32” max stock length.

SOLD SEPARATELY



8-32 Match Grade Point  
(100, & 125 grains)



8-32 Multi Point  
(100, & 125 grains)



6.5MM Brass Insert  
(75, 50 grains)  
*See chart for field point size.*



6.5 WHITEOUT™

Whiteout™ is the next evolution of graphics on a hunting arrow. It offers high visibility flight and big game blood traceability. Shoot Whiteout™ and see what you've been hitting.

6.5MM uniform USA made ACU-CARBON™  
Pre-installed 6.5MM Super Nocks™  
6.5MM anodized inserts included  
Straightness ± .003"



INCLUDED



6.5MM Insert  
{23 grains}  
*Uses 8-32 thread 5/16" field points*



6.5MM Microlite™ Nock  
{8 grains}

SOLD SEPARATELY



8-32 Match Grade Point  
{100, & 125 grains}



8-32 Multi Point  
{100, & 125 grains}



6.5MM Brass Insert  
{75, 50 grains} *See chart for field point size.*

VENTURE™

6mm reduced-diameter higher velocity 100% carbon fiber  
Factory fletched  
Pre-installed 6mm nocks  
6mm ST Inserts included  
Straightness ± .005"

INCLUDED



6MM ST RPS™ 8-32 Insert  
{18 grains} *Uses 8-32 thread 5/16" field points*



6MM H Nock™  
{9 grains}

SOLD SEPARATELY



8-32 Match Grade Point  
{100, & 125 grains}



6MM Brass Break-Off 8-32 Insert  
*{Adjustable to 75-50 grains} See chart for field point size.*



8-32 Multi Point  
{100, & 125 grains}



6MM Superdrive 19  
Adjustable Point  
{90 gr.}

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
300*	9.6	0.300	32.25	5/16	0.301
340	8.8	0.340	31.75	5/16	0.298
400	8.1	0.400	31.25	5/16	0.294
500	7.5	0.500	30.75	5/16	0.291

\*Fletched six-pack arrows are 32" max stock length.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.	6MM ST INSERT	SD 19 ADJUSTABLE POINT
	GPI	Deflection in Inches	Inches	O.D. Inches	Inches	Size	Size
600	5.8	0.600	30.5	9/32	0.268	#1	ONE SIZE



# 5MM CARBON LEGACY™

## FRED EICHLER EDITION

5MM carbon construction  
High visibility white paint crest  
Pre-installed 5MM (X) nocks  
4" shield-cut helical fletch feathers  
5MM HIT 8-32 inserts included  
Straightness ± .003"  
Woodgrain graphics

### INCLUDED



5MM HIT® Insert  
[16 grains]



5MM X Nock™  
[9 grains]

### SOLD SEPARATELY



8-32 Match Grade Point  
[100, & 125 grains]



8-32 Multi Point  
[100, & 125 grains]



5MM Steel 8-32 Half-out  
[75 grains] Uses 8-32 thread 5/16" field points



5MM Brass HIT® Break-off  
8-32 Insert  
[Adjustable to 75-50 grains]  
See chart for field point size.



5MM Aluminum 8-32 Half-out  
[25 grains] Uses 8-32 thread 5/16" field points

NEW



Match Grade HIT Collar  
[13-21 grains] Uses 8-32 thread 5/16" field points

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.	5MM HALF OUT	MATCH GRADE HIT COLLAR
	GPI	Deflection in Inches	Inches	O.D. Inches	Inches	Size	Size
340	9.8	0.340	34	9/32	0.272	#2	#4
400	8.9	0.400	34	17/64	0.267	#2	#3
500	8.0	0.500	34	17/64	0.261	#1	#2
600	7.0	0.600	34	17/64	0.256	#1	#1
700	6.8	0.700	34	17/64	0.254	#1	#1

# 6.5MM CARBON LEGACY™

Realistic woodgrain traditional finish carbon fiber construction  
High visibility white paint crest  
Pre-installed white 6.5MM 3D Supernocks™  
Straightness: ± .005"  
4" shield-cut helical fletch feathers  
Woodgrain graphics

### INCLUDED



6.5MM 3D Super Nock™  
[13 grains]



6.5™ Insert  
[23 grains] Uses 8-32 thread 5/16" field points

### SOLD SEPARATELY



8-32 Match Grade Point  
[100, & 125 grains]



8-32 Multi Point  
[100, & 125 grains]



6.5MM Brass Insert  
[75, 50 grains] See chart for field point size.


SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
340	10.1	0.340	34	5/16	0.307
400	9.3	0.400	34	19/64	0.301
500	8.3	0.500	34	19/64	0.296
600	7.5	0.600	34	19/64	0.291
700	7.1	0.700	34	19/64	0.289

CAMO HUNTER™


Pre-installed Super Nocks™ or X Nocks™  
RPS inserts included  
7075-T9 aluminum alloy  
Straightness: ± .002"



INCLUDED

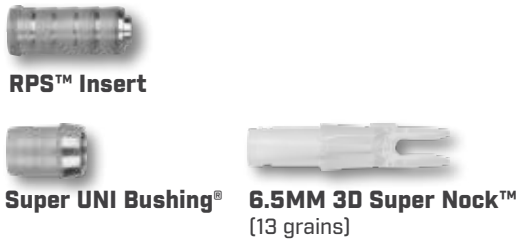

INCLUDED (1916 Only)



SOLD SEPARATELY



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	MINIMUM STOCK LENGTH	BUSHING WEIGHT	FIELD POINT
	GPI	Deflection in Inches	Inches	Grains	Inches
1916	10.0	0.627	31	9	5/16
2016	10.6	0.537	31	4	5/16
2018	12.3	0.468	31	4	19/64
2114	10.4	0.513	32	7	19/64
2117	12.0	0.413	31.5	7	5/16
2213	9.8	0.464	32	9	11/32
2215	10.7	0.425	31.5	9	11/32
2216	12.0	0.382	31.5	9	11/32
2219	13.8	0.342	32	9	11/32
2317	13.3	0.303	32	11	11/32
2413	10.5	0.372	32.5	12	11/32

GAMEGETTER™

Pre-installed Super Nocks™  
RPS inserts included  
7075-T9 aluminum alloy  
Straightness: ± .003"



INCLUDED



SOLD SEPARATELY



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	MINIMUM STOCK LENGTH	BUSHING WEIGHT	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Grains	Inches	Inches
340	11.7	0.349	31	11	19/64	0.296
400	10.6	0.413	31	7	5/16	0.291
500	10.0	0.537	31	4	5/16	0.289



# CROSSBOW

## EASTON 9MM™ • XX75™ MAGNUM • WHITEBOX™

**EASTON 9MM**  
High-strength carbon construction  
Factory installed inserts and nocks



**XX75 MAGNUM**  
Hard-anodized finish  
7075-T9 aluminum alloy  
2219 size  
Easy target pull

**WHITEBOX**  
High strength carbon  
100% straightness checked  
Weight matched  
Fully assembled with 4" vanes, inserts, Halfmoon nocks, and field points  
(Broadheads sold separately)

### EASTON 9MM

LENGTH (inches)	APPROXIMATE WEIGHT (grains)*	GPI	I.D.	O.D.
20	379	8.9	0.300	0.344
22	397	8.9	0.300	0.344

### XX75 MAGNUM

LENGTH (inches)	APPROXIMATE WEIGHT (grains)*	GPI	I.D.	O.D.
20	435	13.8	0.306	0.344
22	462	13.8	0.306	0.344

### WHITE BOX

LENGTH (inches)	GPI	I.D.	O.D.
20	8.9	0.300	0.344

\*Estimated finished arrow weight with 100-grain point allowance.

### NOCKS



**Flatback Nock**  
[9 Grains]



**Halfmoon Nock**  
[11 Grains]

### POINTS/INSERTS



**8-32 Match Grade Point**  
[100, & 125 grains]



**8-32 Multi Point**  
[100, & 125 grains]



**Insert (2219)**  
[26 grains]



**9MM Insert**  
[61 Grains]



**9MM Brass Insert**  
[100 Grains]



# WHITEBOX™

Sold ready to shoot  
100% straightness checked  
29.5 arrow length (ATA standard)  
For bows up to 70 lbs.  
420 grain total weight  
Weight matched  
Vanes, inserts, nocks, and field points included



### INCLUDED



**6.5™ Insert**  
[23 grains]  
*Uses 8-32 thread 5/16" field points*



**8-32 Multi Point**  
[100 grains]



**6.5MM 3D Super Nock™**  
[13 grains]




# BEGINNER ARCHERY

## BEGINNER BOW

The Easton beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron™ string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and arm guard

Kit colors: Black, Pink, and Realtree® Xtra



## BEGINNER FINGER TAB



**SCOUT 2™**

- Durable fiberglass construction
- Over Nock – installed
- Sleeve Point – installed
- 28"



EZ FLETCH™

**(A) SMALL DIAMETER MULTI-KIT**

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"

**(B) SMALL DIAMETER 2" MINI HELICAL TOOL**

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"

**(C) LARGE DIAMETER MULTI-KIT**

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"

**(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL**

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"

VANES

All weights are within ±0.5 grain

2" BULLY™ VANES BY BOHNING®

Ultra-stiff design for high speed stability



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
200	2.00	.568	6.5	● Fire Orange ● Bright Green ● Red ● Yellow ○ White	100 Ct. 36Ct.

BTV 3" VANES™ BY AAE™



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	● Yellow ● Bright Green ● Red ● Fire Orange ○ White	100 Count

EZ Fletch is a trademark of Arizona Rim Country, Inc.  
Bohning is a registered trademark of the Bohning Company Ltd.  
AAE is a trademark of Arizona Archery Enterprises Inc.

VANES

DIAMOND HD 3" VANES™ BY BOHNING



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	● Bright Green ● Yellow ● Red ○ White ● Orange	100-ct.

DIAMOND VANES™ BY AAE



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
175	1.750	.375	3	● Bright Green	100-ct.
235	2.375	.375	4	● Blue	
280	2.875	.500	6	● Yellow	
380	3.875	.500	8	● Fire Orange ○ White ● Black ● Hot Pink	

TITE FLIGHT™ VANES BY AAE

Special rib adds stiffness to cut in-flight flutter and noise



Size	Length (in)	Height (in)	Weight (grains)	Colors	Packaging
200	2.00	.330	4	● Hot Pink ○ White ● Bright Green ● Black ● Fire Orange ● Yellow ● Blue	100-ct.

SPIN WING VANES™ 1.75-inch vanes available in right • Packaging - 50-count bag



Colors ● Black ○ White ● Blue ● Red ● Yellow  
Spin Wing is a trademark of Range-O-Matic Archery Company.

COMPONENTS

4MM

NEW

  
*Patent pending.*

**4MM Match Grade Half-out**  
Steel/Steel 150 grains (sizes #3, #4 & #5 only)

NEW

  
*Patent pending.*

**4MM Match Grade Half-out**  
Titanium/Steel 100 grains

NEW

  
*Patent pending.*

**4MM Match Grade Half-out**  
Aluminum/Steel 75 grains

NEW

  
*Patent pending.*

**4MM Match Grade Half-out**  
Aluminum/Aluminum 55 grains




**4MM Aluminum Half-out**  
50 grains



**4MM Titanium Half-out**  
55 grains




**4MM Steel Half-out**  
95 grains *Uses 8-32 thread 5/16" field points*



**Deep Six™ Steel G (4MM) HIT Insert** (20 Grains)  
Fits G (4MM) diameter carbon, A/C & FMJ  
Uses Deep Six thread points



**4MM Microlite™ Nock** (6 grains)  
Throat: 0.112  
Dozen Pack and 100-count Bulk  
**Colors**  
● Bright Green ● Orange ● Red  
● Smoke ○ White ● Yellow



**4MM G Nock™** (6 grains)  
Throat: Small=0.088, Large= 0.098  
Dozen Pack and 100-count Bulk  
**Colors**  
● Blue ○ White ● Green ● Orange ● Red  
● Lemon Lime ● Pink ● Smoke ● Black

5MM



**5MM Aluminum 8-32 Half-out**  
25 grains



**5MM Steel 8-32 Half-out**  
75 grains



**Brass X (5MM) HIT® INSERT**  
75 – 50 Grains




**5MM X HIT® Insert**  
16 grains  
*Dozen Pack and 100 count Bulk*

NEW



**Match Grade HIT Collar**  
(13-21 grains) *Uses 8-32 thread 5/16" field points*



**5MM X Nock™**  
Throat: 0.111  
Dozen Pack and 100-count Bulk  
9 grains  
**Colors**  
● Bright Green ● Orange ● Red  
● Smoke ○ White ● Yellow

6MM




**6MM ST RPS Insert**  
18 grains



**6MM Brass Insert**  
75 – 50 grains




**Superdrive 19 Adjustable Point**  
(90 gr.)



**6MM H Nock™** (9 grains)  
Throat: 0.111  
Dozen Pack and 100-count Bulk  
**Colors**  
● Bright Green ● Orange ● Red  
● Smoke ○ White ● Yellow

6.5MM



**6.5MM™ Brass Insert**  
50-75 grains



**6.5MM™ Insert**  
23 grains



**6.5MM™ Insert**  
23 grains



**6.5MM CB™ Point**  
Fits S (6.5MM) diameter arrows  
Point Weight – 80 & 100 Grains



**6.5MM MicroLite™ Super Nock™**  
Throat: 0.108  
Dozen Pack and 100-count Bulk  
8 grains  
**Colors**  
● Bright Green ● Orange ● Red  
● Smoke ○ White ● Yellow



**6.5MM 3D Super Nock™**  
Throat: 0.103  
Dozen Pack and 100-count Bulk  
13 grains  
**Colors**  
● Blue ○ White ● Green ● Orange ● Red  
● Lemon Lime ● Pink ● Smoke ● Black


CROSSBOW



**9MM Crossbow Insert**  
61 Grains



**9MM Brass Insert**  
100 Grains



**9MM Halfmoon Nocks**  
11 grains  
**Colors**  
○ White ● Green ● Orange




**Aluminum (2219)**  
40 Grains




**9MM Flatback Nocks**  
9 grains  
**Colors**  
○ White ● Green ● Orange

FIELD POINTS



**8-32 Match Grade Point**  
11/32" – 100, 125, 150 grains  
5/16" – 100, 125 grains  
9/32" – 100, 125 grains  
17/64" – 100, 125 grains  
19/64" – 100, 125 grains



**Multi Point™**  
11/32" – 100, 125 grains  
5/16" – 100, 125 grains  
9/32" – 100, 125 grains  
17/64" – 100, 125 grains  
19/64" – 100, 125 grains



**Deep Six™ Field Points**  
Fits 4MM & 5MM  
with Deep Six thread inserts  
100 Grains

See arrow model pages for component diameter selection.



# TOOLS & SUPPLIES

## QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz.
- HIT approved



## CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



## BCY™ POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool



## FASTSET™ VANE GEL

- Sizes: 3 gram



## HIT™ EPOXY SINGLE USE

- Provides a permanent bond
- Flexible, non-brittle formulas



## UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



## QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz.



## QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



## FLETCH-TITE® PLATINUM

- Size: 22-gram tube



## HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Available in 10" shop stick



## FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



## WEDGE ARROW PULLER

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



## BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools



Fletch-Tite® is a registered trademark of Bohning Company LTD

# TOOLS & SUPPLIES

## ELITE NOCK AND D-LOOP PLIERS

- Maximizes mechanical advantage for tightest possible D-loops
- Patented dual-jaw design
- Convenient and versatile archery tool
- Six tools in one



## PRO ARCHERY NEEDLE-NOSE PLIERS

- A must have for any serious bow mechanic
- Rubber-coated handle
- Needle-nose plier design with archery specific features for D-loop stretching and hot-melt point installation



## ARCHERY OMNI TOOL BY FIX-IT STICKS® - 17 PIECE

- Integrates 17 of the most popular Standard & Metric Hex, and Star bit sizes into the most compact archery tool ever produced
- Snaps together in a T-shape for leverage
- Includes the following bit sizes:
  - Standard Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050"
  - Metric Sizes: 1.5, 2.5, 3.0
  - Star Tip Sizes: T10, T15, T20



## PRO HEX FOLD UP SET - STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



## PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



## PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and a 1/8" flat blade screwdriver



## PRO HEX STUBBY 10 PIECE "L" WRENCH SET - XL


- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



TOOLS & SUPPLIES

BOW SQUARES

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up

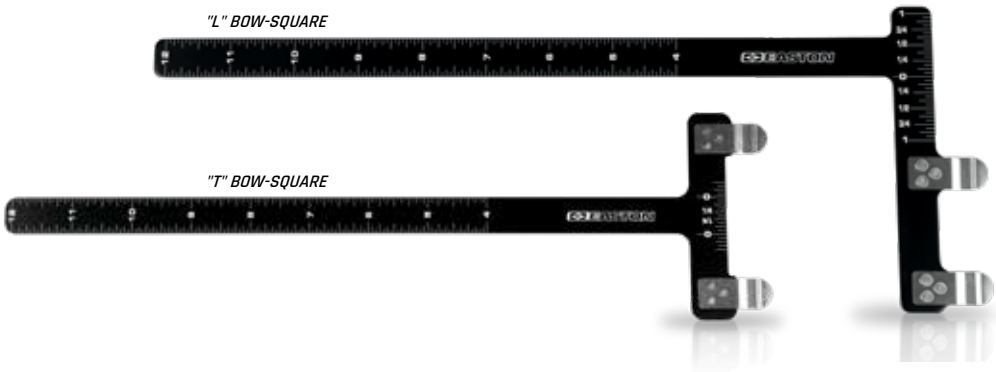

9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to 27/64" diameters



ARCHERY ESSENTIALS™ TOOL KITS

- Kit items save 30% versus items sold separately
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors

12 and 8-PIECE KITS INCLUDES:

- Extra large folding allen wrench set
- Nock installation & removal tool
- Wedge arrow puller
- Zippered case cube
- Bowstring wax
- Serving thread
- D-Loop rope
- Broadhead wrench

12-PIECE KIT ADDS:

- D-Loop pliers
- Bow-square-L model
- Small folding allen wrench set
- Arrow prep tool kit



8-PIECE VALUE PACK



12-PIECE PRO SHOP

SHOOTING ACCESSORIES

STAY SHARP™ BROADHEAD CASE

- Grippers ensure broadhead sharpness by supporting ferrules without contacting blades
- Hold six mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads
- Dimensions: approximately 5"W x 4"H x 2"D



DELUXE ARM GUARD

- Progressive designs molded from durable polycarbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and "dog" bone shapes
- Colors: blue, red, yellow, and smoke



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL, and XXL
- Color: black/white



COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: black



STIFF WRIST SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: black, camo, green, pink, blue, red, and orange



DELUXE PARACORD DIAMOND WRIST SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: black, camo, green, pink, blue, red, and orange



NEOPRENE WRIST SLING

- Durable, lightweight neoprene construction
- Easy-adjust strap






COMPETITION QUIVERS

ELITE™ FIELD QUIVER WITH BELT

- European-inspired luxurious design
- Technical synthetic leather construction
- Infinitely adjustable and sturdy, Elite quiver belt uses secure T-style buckle
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet, customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included-release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white

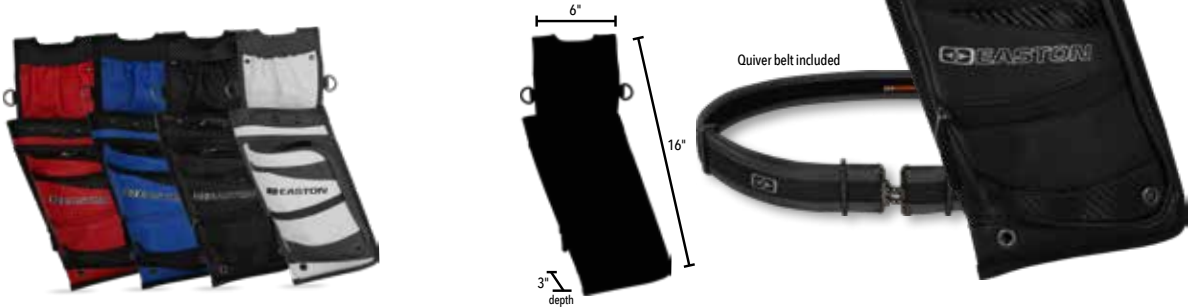

ELITE™ QUIVER BELT

- One size fits most
- T-style buckle
- Included with Elite quivers—also sold separately
- Colors: red, blue, grey, carbon black, and white




ELITE™ RELEASE POUCH



ELITE™ TAKEDOWN HIP QUIVER WITH BELT

- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, Elite quiver belt with T-style buckle for secure operation-included
- Allows quiver body tube to separate from belt loop for easy storage
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white

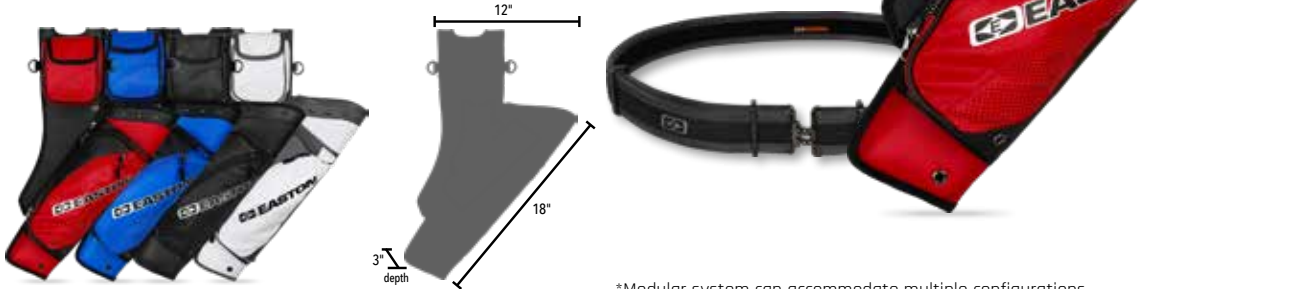

\*Modular system can accommodate multiple configurations

DELUXE FIELD QUIVER WITH BELT

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Adjustable, sturdy Deluxe Quiver belt with T-style buckle included
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch sold separately
- Colors: silver, red, blue, and black
- Left-hand models only available in black and silver



DELUXE QUIVER BELT

- One size fits most
- Innovative hook-and-loop adjustment
- Easy on/off T-buckle connection



DELUXE RELEASE POUCH



DELUXE TAKEDOWN HIP QUIVER WITH BELT

- Allows quiver body tube to separate from belt loop for easy storage
- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Adjustable Deluxe Quiver Belt with T-style buckle included
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory-attachment rings
- Colors: silver, red, blue, and black
- Left-hand models only available in black and silver



RECREATIONAL QUIVERS

FLIPSIDE™ 4-TUBE HIP QUIVER WITH BELT

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop pocket for right/left side wear
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: black, red, blue, Realtree Edge®, & ranger green



FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: black, red, blue, Realtree Edge® & ranger green



FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: black, red, blue, Realtree Edge® & ranger green



REPLACEMENT FLIPSIDE™ ARROW TUBE



REPLACEMENT BELT CLIP



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

TRAVEL BOWCASES

BOWTRUK™ GEN 2 4716, 4017 & 3616 TRAVEL BOWCASE

- Accommodates two bows up to 47 inch overall length
- Ballistic nylon shell with TPU coated exterior for durability
- Six interior & exterior accessory pockets for bow-sights, gear, and arrows
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Double seatbelt-style bow retaining straps
- Padded carry handle
- Compatible with Easton arrow totes & boxes
- Hybrid hard/soft shell perimeter protection
- Dark grey
- 47" L X 16" W X 9" H [Model 4716]
- 40" L X 17" W X 9" H [Model 4017]
- 36" L X 16" W X 9" H [Model 3616]



BOWCASES

WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with Easton Deluxe Hip/Field quivers
- Dense 360° exterior/corner cam padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: black





# BOWCASES

## NEW WORKHORSE MAX™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Ten interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Shoulder strap included
- Colors: Charcoal grey, Tundra Tan



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

## WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Eight interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable hook-and-loop bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: Charcoal, Realtree Edge



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

## BOW-GO™ 4118 **NEW COLOR**

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow mounted quivers and maximum inside storage
- Four interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: Black, **Ranger Green**, Realtree Edge, Olive/Grey



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

# BOWCASES

## MICRO FLATLINE™ 3618 **NEW COLOR**

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors,Black/Grey, **Tundra Tan**, Realtree Edge



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

## GENESIS™ 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Blue, Black and Pink
- 40" L x 14" H



## BOWSLICKER™

- Easy, secure carry with patented limb loop design
- Quick and quiet removal
- Keep cams and strings protected from brush
- Fits all compound bows, including parallel limbs, up to 36" axle-to-axle
- Color: Olive Green



Officially Licensed Product  
Protected by US Patents:  
9,038,878 & 9,310,158



# BOWCASE ACCESSORIES

## CASE CUBES™

### BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



## DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
  - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
  - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
  - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
  - Round Arrow Tote (12-arrow) - adjustable length



# PACKS

## CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with great features
- High-denier fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: grey, blue, red, and black



## DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



## UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks



SHAFT MODELS

FMJ & A/C	Materials/Construction	Nock Type	Straightness¹	Color/Finish	Sizes
4MM X10 PARALLEL PRO™	High-strength carbon fiber bonded to a 7075 core	4MM Microlite™	±.0015"	Polished black carbon	See page 13.
4MM FMJ™ MATCH GRADE	Precision 7075 alloy jacket bonded to a carbon core	4MM Microlite™	±.001"	Diamond Pattern	400, 340, 300, 250
4MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core	4MM Microlite™	±.001"	Diamond Pattern	400, 340, 300, 250
5MM FMJ™ MATCH GRADE	Precision 7075 alloy jacket bonded to a carbon core	5MM X™	±.001"	Diamond Pattern	500, 400, 340, 300, 250
5MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core	5MM X™	±.001"	Diamond Pattern	500, 400, 340, 300, 250
5MM FMJ™ AUTUMN ORANGE	Precision 7075 alloy jacket bonded to a carbon core	5MM X™	±.001"	Autumn Orange	500, 400, 340, 300, 250
ALL CARBON	Materials/Construction	Nock Type	Straightness²	Color/Finish	Sizes
4MM AXIS LONG RANGE™	Acu-Carbon™	4MM Microlite™	±.003"	Black, Micro-smooth	400, 340, 300, 250
4MM AXIS LONG RANGE™ MATCH GRADE	Acu-Carbon™	4MM Microlite™	±.001"	Black, Micro-smooth	400, 340, 300, 250
5MM AXIS™	Acu-Carbon™	5MM X™	±.003"	Black, Micro-smooth	600, 500, 400, 340, 300, 260, 200
5MM AXIS SPT™	Acu-Carbon™	5MM X™	±.006"	Black, Micro-smooth	600, 500, 400, 340, 300, 260, 200
5MM AXIS MATCH GRADE™	Acu-Carbon™	5MM X™	±.001"	Black, Micro-smooth	400, 340, 300, 260, 200
5MM CARBON LEGACY EICHLER™	High-strength carbon fibers	5MM X™	±.003"	Woodgrain Graphic	700, 600, 500, 400, 340
6.5MM CARBON LEGACY™	High-strength carbon fibers	6.5MM 3D	±.005"	Woodgrain Graphic	700, 600, 500, 400, 340
6MM SONIC 6.0™	Acu-Carbon™	6MM H™	±.003"	Black, Micro-smooth	600, 500, 400, 340, 300, 250
6MM SONIC 6.0™ MATCH GRADE	Acu-Carbon™	6MM H™	±.001	Black, Micro-smooth	600, 500, 400, 340, 300, 250
EASTON 6.5MM MATCH GRADE™	Acu-Carbon™	6.5MM	±.001"	Black, Micro-smooth	500, 400, 340, 300, 250
EASTON 6.5MM HUNTER CLASSIC™	Acu-Carbon™	6.5MM	±.003"	Black, Micro-smooth	500, 400, 340, 300, 250
EASTON 6.5MM BOWHUNTER™	Acu-Carbon™	6.5MM	±.005"	Black, Micro-smooth	500, 400, 340, 300, 250
6MM VENTURE™	Acu-Carbon™	6.0MM	±.003"	Black, Micro Smooth	600
6.5MM WHITEOUT™	Acu-Carbon™	6.5MM	±.003"	White	500, 400, 340, 300
6.5MM WHITEBOX™	Acu-Carbon™	6.5MM	NA	Black, Micro-smooth	One Size
ALUMINUM	Alloy	Nock Type	Straightness¹	Color/Finish	Sizes
CAMO HUNTER™	7075-T9	3D Super	±.002"	4-Tone Black, Brown, Dark Green, & Light Green Dye Camo	1816, 1916, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2317, 2413
GAMEGETTER™	7075-T9	3D Super	±.003"	Black, Hard-anodized	500, 400, 340

1 Guaranteed straight to more stringent standards than ATA/ ASTM methods.  
2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.      ®/™ Registered trademark/trademark of Easton.

**LIMITED WARRANTY**  
The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see [www.eastonhunting.com](http://www.eastonhunting.com).

Some of the products on these pages are covered by one or more of these patents: 7,004,859 - 7,077,770 - 7,115,055 - 7,115,055

CROSSBOW

MODEL	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance³	Straightness	Color/Finish	Sizes
WHITE BOX™	Acu-Carbon	9MM Bolt Insert	RPS Point	Internal-fit	Halfmoon, Flatback	±.2 grains	±.003"²	Black, Micro-smooth	20
EASTON 9MM™	Acu-Carbon	9MM Bolt Insert	RPS Point	Internal-fit	Halfmoon, Flatback	±.2 grains	±.003"²	Black, Micro-smooth	20, 22
MAGNUM XX75™	7075 -T9	RPS Insert	RPS Point	Internal-fit	Halfmoon, Flatback	±.2 grains	±.003" ¹	Gray Anodize	20, 22

1 Guaranteed straight to more stringent standards than ATA/ ASTM methods.      3 Grains-per-shafts in a dozen bundle.  
2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.      ®/™ Registered trademark/trademark of Easton.

ALLOY SHAFT AND COMPONENT SPECIFICATIONS

Size	Shaft Weight		Spine @ 28" Span	Minimum¹ Stock Length		UNI System			Adjustable Points	NIBB Point	One-piece Bullet Point	RPS Insert Alum.	RPS Point Size
	XX75	X7		XX75	X7	UNI Bushing	X Nock Bushing	Super UNI Bushing					
	Grains per Inch		Deflection in Inches	Inches		Grains	Grains	Grains	Grains	Grains²	Grains	Grains²	Grains
1214	5.9	—	2.501	25.5	—	—	—	—	—	—	45	—	—
1416	7.2	—	1.684	26.25	—	2	—	—	—	46	50	—	—
1514	—	6.8	1.384	—	25	5	—	—	—	61⁹	50	—	—
1516	7.3	—	1.405	26.75	—	3	—	—	—	48	50	—	—
1614	—	7.7	1.157	—	26.75	5	—	—	—	51	50	—	—
1616	8.4	—	1.082	27.5	—	5	—	—	—	56	60	—	—
1714	—	8.1	0.967	—	27.75	7	—	—	—	56	60	—	—
1716	9.0	—	0.882	29	—	7	—	—	—	60	65	10	17/64
1814	—	8.6	0.804	—	29.5	8	—	—	—	60	65	—	—
1816	9.3	—	0.759	29	—	8	4	—	—	63	75	12	9/32
1820	12.2	—	0.595	29	—	—	—	—	—	—	59	—	—
1913	8.3	—	0.738	31	—	9	—	—	—	64	90	18	5/16
1914	—	9.3	0.663	—	29.5	9	—	—	—	64	90	—	—
1916	10.0	—	0.627	30	—	9	7	—	—	72	90	16	5/16
2013	9.0	—	0.616	32	—	—	—	5	—	68	90	21	5/16
2014	—	9.6	0.584	—	31½	—	—	5	100	71	90	—	—
2016 (500)	10.6	—	0.537	31	—	—	—	4	—	—	90	20	5/16
2018	12.3	—	0.468	30.5	—	—	—	4	—	—	90	19	5/16
2114	9.9	9.9	0.513	30	31	—	—	7	—	78	90	25	5/16
2117 (400)	12.0	—	0.413	31.5	—	—	—	7	—	—	100	25	5/16
2213	9.8	9.9	0.464	30.5	32	—	—	9	—	88	90	30	11/32
2214	—	10.4	0.431	—	31.9	—	—	9	100	103	100	—	—
2215	10.7	9.5	0.425	31.5	—	—	—	9	—	—	100	30	11/32
2216	12.0	—	0.382	32	—	—	—	9	100	—	100	29	11/32
2219	13.8	—	0.342	32	—	—	—	9	—	—	100	29	11/32
2312	—	9.5	0.429	—	31.75	—	—	11	—	99	100	37	11/32
2314	10.7	10.8	0.377	32	32.25	—	—	10	100	—	100	34	11/32
2315 (340)	11.7	11.7	0.340	32	32.6	—	—	11	100	—	100	37	11/32
2317	13.3	—	0.303	32	32.75	—	—	11	100	—	100	37	11/32
2318	—	13.7	0.304	—	32.75	—	—	11	—	—	200	—	—
2413	10.4	10.5	0.372	—	34	—		12	—	110	100	40	11/32
2512	—	10.3	0.329	—	33	—	—	15	—	108	100	52	11/32
2613	—	11.5	0.272	—	33	—	—	17	—	—	150	58	3/8
2712	—	11.3	0.267	—	33	—	—	19	200	—	150/300	—	—

— Indicates not available  
1 Length is approximate stock shaft length for each size.  
2 NIBB point grain weights are ±0.5 grain. All other components are ±1 grain





**WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE AT [WWW.BSAFE.WS](http://WWW.BSAFE.WS) OR 877-INFO-ETP (877-463-6387).**

## CHECK EVERY ARROW, EVERY SHOT

### ARROW DAMAGE

Any arrow can be damaged, even when new. A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. Damage to an arrow shaft, or any of its components, may occur from improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

### ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection information at [www.eastonarchery.com/warning-use/](http://www.eastonarchery.com/warning-use/)). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, DISCARD THE ARROW.

**WARNING! NEVER SHOOT A DAMAGED ARROW.**

A loose or damaged nock may indicate a damaged arrow shaft or otherwise be dangerous. Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose or is damaged, DISCARD THE ARROW.

**WARNING! NEVER SHOOT AN ARROW WITH A LOOSE OR DAMAGED NOCK.**

### BOW INSPECTION

Before shooting any arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at [www.eastonarchery.com/shaft-selector/](http://www.eastonarchery.com/shaft-selector/)). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage. **WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.**

## ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:

1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel, look and listen for cracking (Figure 1). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**



FIGURE 1

2. While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (Figure 2). If the arrow "relaxes" or twists easily, the carbon has been damaged. DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.** A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**



FIGURE 2

### CARBON ARROW CUTTING

Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

### SOLVENTS

CAUTION: When removing fletchings, or for any other reason, do not soak any carbon arrow shaft in solvents. This can weaken the resin that bonds the carbon fibers. (For directions on arrow set up, refer to the Easton Tuning Guide.)

**WARNING! NEVER SHOOT A DAMAGED ARROW.**

**To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.**



**WARNING:** Cancer and Reproductive Harm — [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

Some of the products listed in this Product Guide may be subject to California Proposition 65 warnings requirements. See product packaging or website for specific warning information. This Product Guide is intended for informational purposes only, not a solicitation for product sales.





**E EASTON**  
MADE IN USA 