


EASTON®

BOWHUNTING 2025



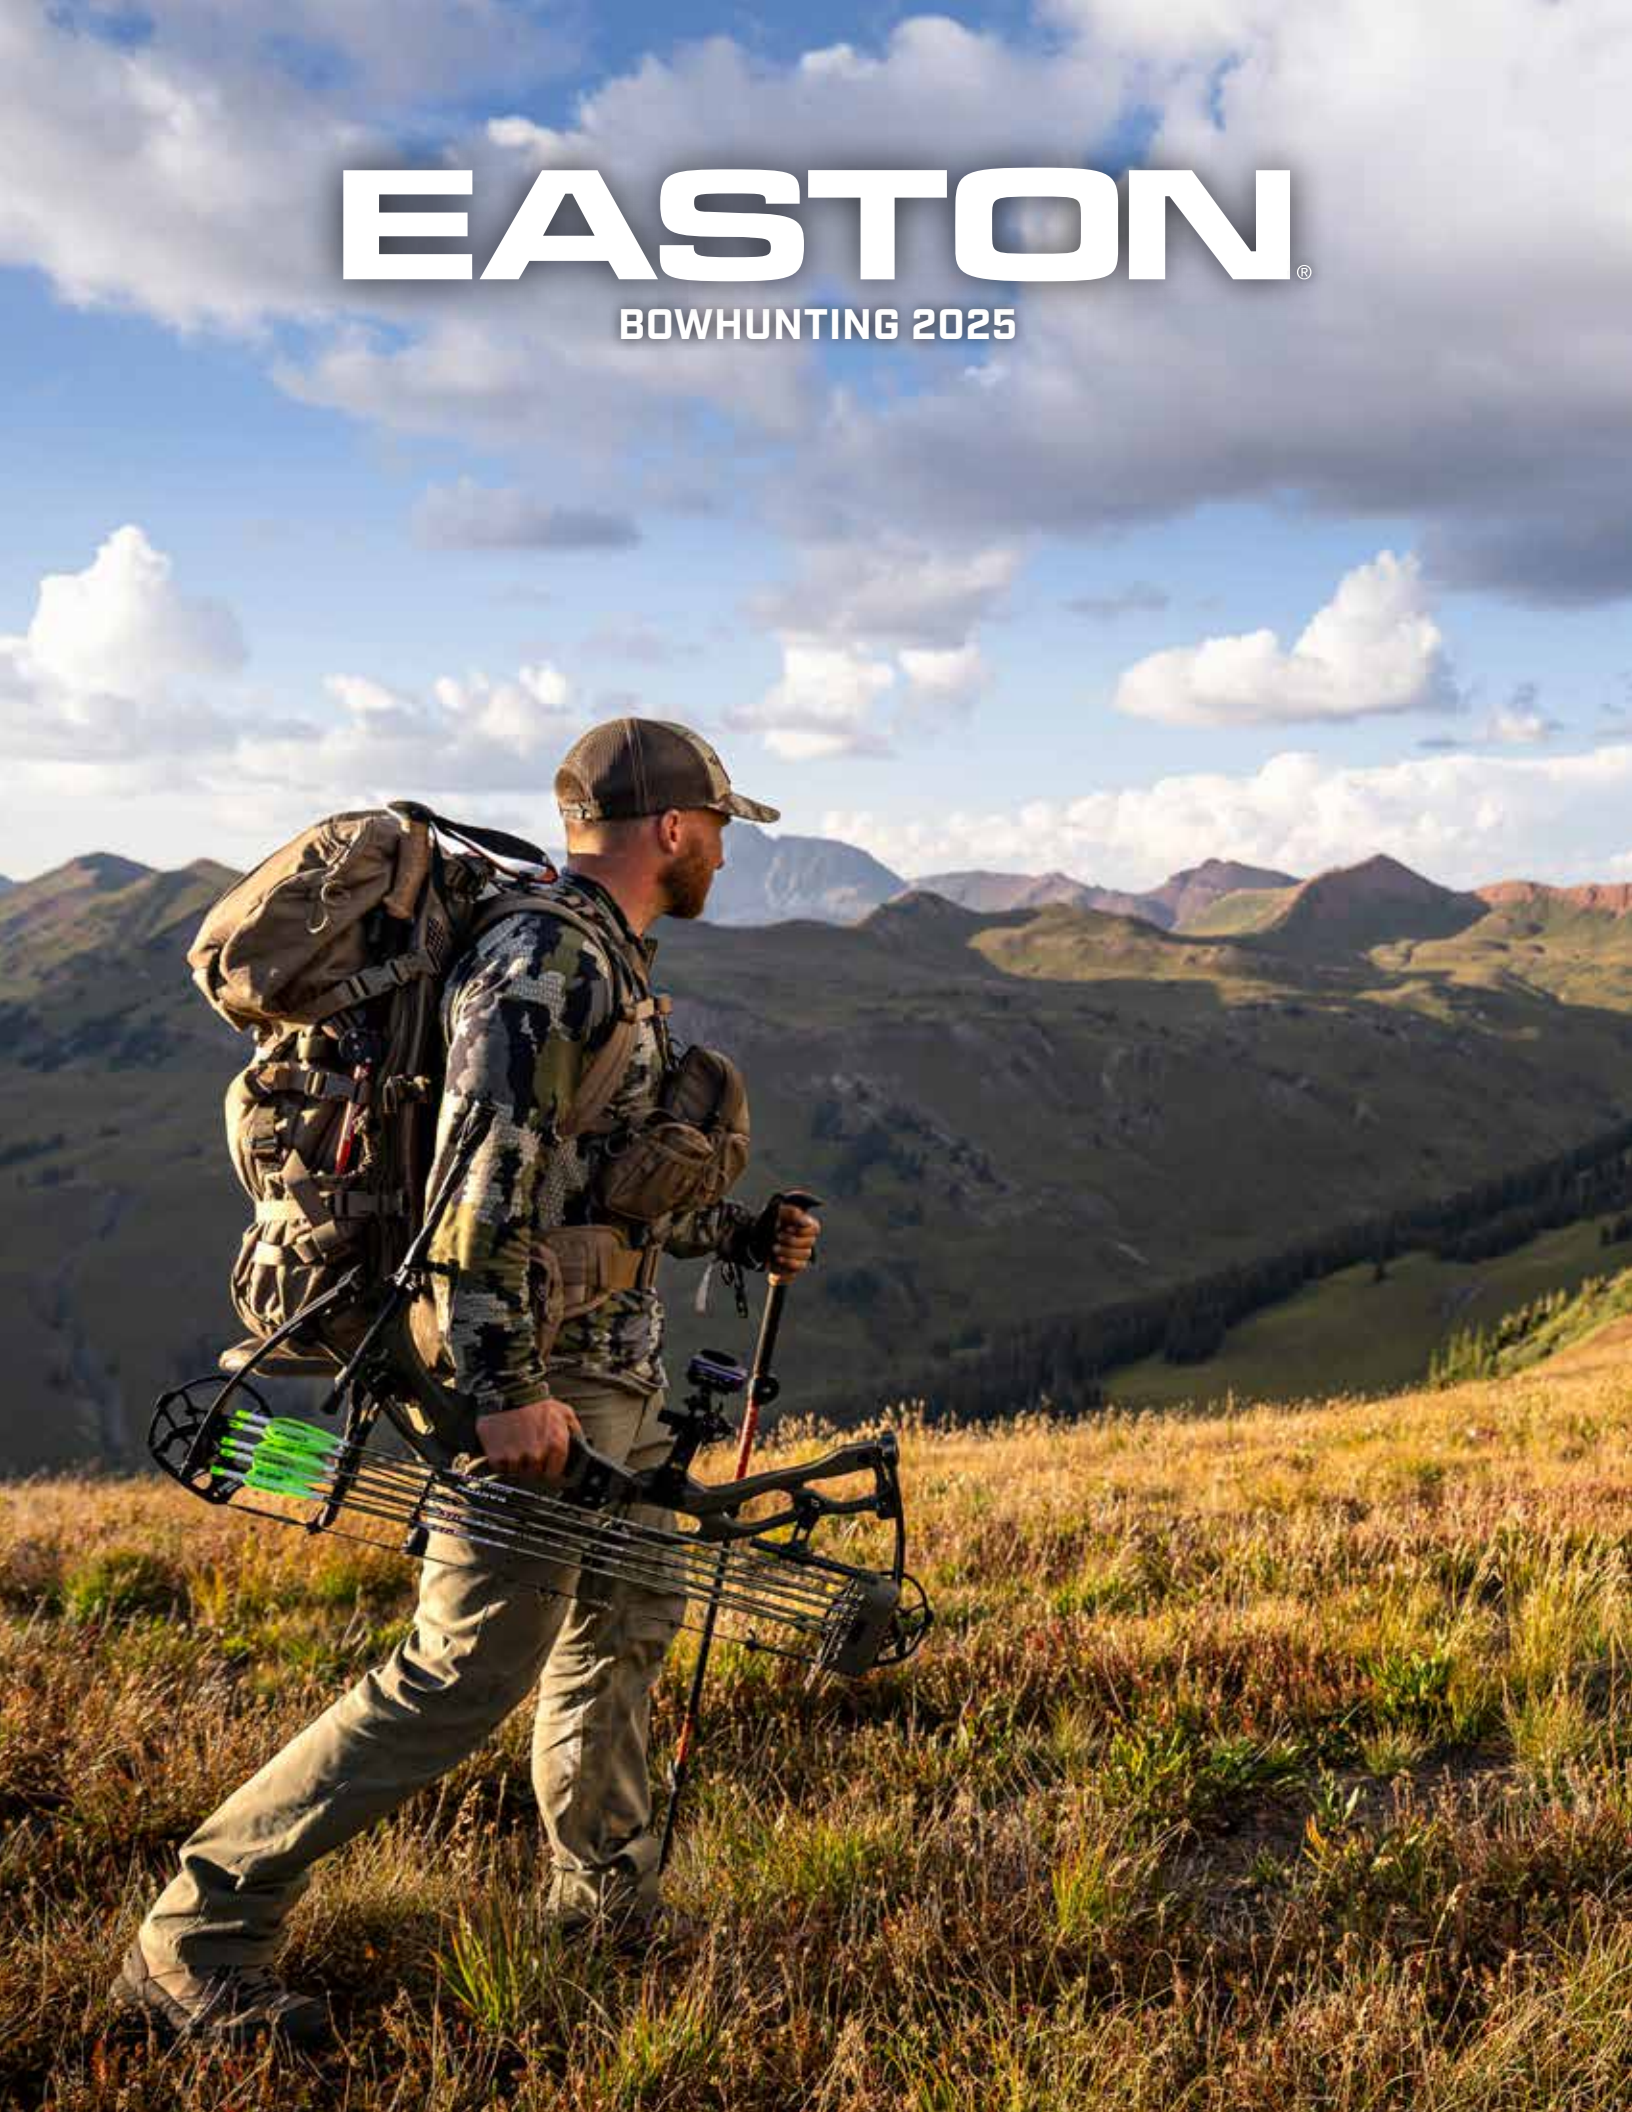

Get Olympic-level craftsmanship
in your hunting arrow.

- 4.0MM
- 5.0MM
- 6.0MM
- 6.5MM


NEW

X10[®] PARALLEL PRO[™] HUNTER

0.167" ID MICRO-DIAMETER CARBON FIBER WITH ALUMINUM CORE

- 4MM Microlite[™] nocks
- AAE[™] Hybrid 26 helical fletch
- Half-out or Deep Six inserts
- Straightness ± .001"
- Carbon/aluminum
- Available in six-pack fletched or bare shafts (components not included with bare shafts)
- Made In USA

INCLUDED (six-pack fletched)



4MM Match Grade Half-out Aluminum/Aluminum
Uses 8-32 thread 5/16" field points. (55 grains)



4MM Microlite Nock
(6 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	O.D.	4MM HALFOUT & MATCH GRADE	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	nches	Size	Size
250*	10.8	0.250	34	0.245	#4	#7
300*	9.5	0.300	33.63	0.236	#2	#5
340	8.9	0.340	33.63	0.231	#1	#4
380	8.3	0.380	32.62	0.227	#1	#4

*Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc.

4MM FMJ[®] MATCH GRADE[™]

0.167" ID MICRO-DIAMETER CARBON CORE WITH 7075 ALLOY METAL JACKET

- Pre-installed 4MM Microlite[™] nocks
- AAE[™] Hybrid 26 helical fletch
- 8-32 4MM aluminum half-out inserts
- Straightness ± .001
- Acu-Carbon[™] core–aluminum jacket
- Made In USA

INCLUDED



4MM Match Grade Half-out Aluminum/Aluminum
Uses 8-32 thread 5/16" field points. (55 grains)



4MM Microlite Nock
(6 grains)



Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	8-32 FIELD POINT	O.D.	4MM HALFOUT & MATCH GRADE	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	100 Grains (optional)	Inches	nches	Size	Size
250*	12.3	0.250	33	DP6-6	5/16	0.247	#5	#8
300*	11.7	0.300	32.5	DP6-6	5/16	0.244	#4	#7
340	11.0	0.340	32	DP6-5	5/16	0.240	#3	#6
400	9.8	0.400	31.5	DP6-5	5/16	0.234	#2	#5

**Fletched six-pack arrows are 32" max stock length.*
AAE is a registered trademark of Arizona Archery Enterprises Inc.

4MM FMJ[®]

0.167" ID MICRO-DIAMETER CARBON CORE WITH 7075 ALLOY METAL JACKET

- Pre-installed 4MM Microlite[™] nocks
- 8-32 4MM aluminum half-out inserts
- Straightness ± .001
- Acu-Carbon[™] core–aluminum jacket
- Made In USA

INCLUDED



4MM 8-32 Aluminum Half-out
Uses 8-32 thread 5/16" field points. (50 grains)



4MM Microlite Nock
(6 grains)



Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	8-32 FIELD POINT	O.D.	4MM HALFOUT & MATCH GRADE	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	100 Grains (optional)	Inches	nches	Size	Size
250*	12.3	0.250	33	DP6-6	5/16	0.247	#5	#8
300*	11.7	0.300	32.5	DP6-6	5/16	0.244	#4	#7
340	11.0	0.340	32	DP6-5	5/16	0.240	#3	#6
400	9.8	0.400	31.5	DP6-5	5/16	0.234	#2	#5

**Fletched six-pack arrows are 32" max stock length.*

NEW

5MM FMJ[®] MAX MATCH GRADE[™]

0.204" ID SMALL-DIAMETER CARBON CORE WITH LIGHT WEIGHT 7075-ALLOY METAL JACKET

- Pre-installed 5mm Microlite[™] nocks
- AAE[™] Hybrid 26[™] helical fletch
- 5MM HIT[®] 8-32 inserts or 5MM Steel Halfout included
- Straightness ± .001"
- Acu-Carbon[™] core–aluminum jacket
- Made In USA

INCLUDED



5MM HIT[®] Insert
See chart for field point size. (16 grains)



Match Grade HIT Collar
Uses 8-32 thread 5/16" field points. (13-21 grains)



NEW

5MM Microlite Nock
(8 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR & HALF OUT	O.D.	5MM 8-32 1-PIECE STEEL HALF OUT
	GPI	lection in In	Inches	O.D. Inches	Size	Inches	Size
200*	13.3	0.200	33.5	9/32	#5	0.280	#2
250*	11.3	0.250	33	9/32	#3	0.269	#2
300*	10.3	0.300	32.5	17/34	#2	0.264	#2
340	9.8	0.340	32	17/64	#1.5	0.261	#1
400	9.0	0.400	31.5	17/64	#1	0.257	#1

**Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc.*


NEW

5MM FMJ[®] MAX

0.204" ID SMALL-DIAMETER CARBON CORE WITH LIGHT WEIGHT 7075-ALLOY METAL JACKET

- Pre-installed 5mm Microlite[™] nocks
- 2" Blazer[™] vanes factory helical fletch
- 5MM HIT[®] 8-32 inserts included
- Straightness ± .001"
- Acu-Carbon[™] core–aluminum jacket
- Made In USA

INCLUDED



5MM HIT[®] Insert
See chart for field point size. (16 grains)

OR



NEW

5MM 8-32 Steel Half-out
Uses 8-32 thread 5/16" field points. (50 grains)



NEW

5MM Microlite Nock
(8 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR & HALF OUT	O.D.	5MM 8-32 1-PIECE STEEL HALF OUT
	GPI	lection in In	Inches	O.D. Inches	Size	Inches	Size
200*	13.3	0.200	33.5	9/32	#5	0.280	#2
250*	11.3	0.250	33	9/32	#3	0.269	#2
300*	10.3	0.300	32.5	17/34	#2	0.264	#2
340	9.8	0.340	32	17/64	#1.5	0.261	#1
400	9.0	0.400	31.5	17/64	#1	0.257	#1

**Fletched six-pack arrows are 32" max stock length.
Blazer is a trademark of the Bohning Company Ltd.*

5MM FMJ[®] MATCH GRADE[™]

0.204" ID SMALL-DIAMETER CARBON CORE WITH 7075-ALLOY METAL JACKET

- Pre-installed 5mm (X) nocks
- AAE[™] Hybrid 26[™] helical fletch
- 5MM HIT[®] 8-32 inserts and collars included
- Straightness ± .001"
- Acu-Carbon[™] core–aluminum jacket
- Made In USA

INCLUDED



5MM HIT[®] Insert
See chart for field point size. (16 grains)



Match Grade HIT Collar
Uses 8-32 thread 5/16" field points. (13-21 grains)



5MM X Nock
(9 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR & HALF OUT	O.D.	5MM 8-32 1-PIECE STEEL HALF OUT
	GPI	lection in In	Inches	O.D. Inches	Size	Inches	Size
250*	11.5	0.250	33	9/32	#3	0.273	#2
300*	12.0	0.300	32.5	9/32	#4	0.273	#2
340	11.3	0.340	32	9/32	#3	0.269	#2
400	10.2	0.400	31.5	17/64	#2	0.263	#2
500	9.1	0.500	31	17/64	#1	0.256	#1

**Fletched six-pack arrows are 32" max stock length.*
AAE is a registered trademark of Arizona Archery Enterprises Inc.

5MM FMJ[®] + DANGEROUS GAME

0.204" ID SMALL-DIAMETER CARBON CORE WITH 7075-ALLOY METAL JACKET

- Pre-installed 5mm (X) nocks
- 5MM HIT[®] 8-32 inserts included
- Straightness ± .001"
- Acu-Carbon[™] core–aluminum jacket
- Made In USA
- Available with HIT or half-out inserts

INCLUDED



5MM HIT[®] Insert
(16 grains) See chart for field point size.



5MM X Nock
(9 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR & HALF OUT	O.D.	5MM 8-32 1-PIECE HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Size	Inches	Size
250**	17.7	0.250	32.5	19/64	NA	0.290	NA
250*	11.5	0.250	33	9/32	#3	0.273	#2
300*	12.0	0.300	32.5	9/32	#4	0.273	#2
340	11.3	0.340	32	9/32	#3	0.269	#2
400	10.2	0.400	31.5	17/64	#2	0.263	#2
500	9.1	0.500	31	17/64	#1	0.256	#1

**** Dangerous Game**
**Fletched six-pack arrows are 32" max stock length.*

4MM AXIS® LONG RANGE MATCH GRADE™

0.167" ID 4MM MICRO-DIAMETER UNIFORM ACU-CARBON™

- Pre-installed 4MM Microlite™ nocks
- AAE™ Hybrid 26™ helical fletch
- 8-32 4MM aluminum half-out inserts
- Straightness: ± .001"
- 4MM Acu-Carbon™
- Made In USA

INCLUDED



4MM Match Grade Half-out Aluminum/Aluminum
Uses 8-32 thread 5/16" field points. (55 grains)



4MM Microlite Nock
(6 grains)

PRO SHOP EXCLUSIVE



Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	8-32 FIELD POINT	O.D.	4MM HALFOUT & MATCH GRADE	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	Grains (optional)	Inches	Inche	Size	Size
250*	9.8	0.250	33	DP6-6	5/16	0.244	#4	#7
300*	9.3	0.300	32.5	DP6-6	5/16	0.241	#3	#6
340	8.3	0.340	32	DP6-4	5/16	0.234	#2	#5
400	7.6	0.400	31.5	DP6-4	5/16	0.229	#1	#4

*Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc.

4MM AXIS® LONG RANGE

0.167" ID 4MM MICRO-DIAMETER UNIFORM ACU-CARBON™

- Pre-installed 4MM Microlite™ nocks
- 8-32 4MM aluminum half-out inserts
- Straightness: ± .003"
- Made In USA

INCLUDED



4MM 8-32 Aluminum Half-out
Uses 8-32 thread 5/16" field points. (50 grains)



4MM Microlite Nock
(6 grains)



Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	8-32 FIELD POINT	O.D.	4MM HALFOUT & MATCH GRADE	4MM NOCK COLLAR
	GPI	Deflection in Inches	Inches	Grains (optional)	Inches	Inche	Size	Size
250*	9.8	0.250	33	DP6-6	5/16	0.244	#4	#7
300*	9.3	0.300	32.5	DP6-6	5/16	0.241	#3	#6
340	8.3	0.340	32	DP6-4	5/16	0.234	#2	#5
400	7.6	0.400	31.5	DP6-4	5/16	0.229	#1	#4

*Fletched six-pack arrows are 32" max stock length.

5MM AXIS® MATCH GRADE™

0.204" ID 5MM SMALL-DIAMETER UNIFORM ACU-CARBON™

- Pre-installed 5MM (X) nocks
- AAE™ Hybrid 26™ helical fletch (Match Grade)
- 5MM HIT 8-32 inserts included
- Straightness ± .001"
- Made In USA

INCLUDED



5MM HIT® Insert
See chart for field point size. (16 grains)



Match Grade HIT Collar
Uses 8-32 thread 5/16" field points. (13-21 grains)



5MM X Nock
(9 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR & HALF OUT	O.D.	5MM 8-32 1-PIECE HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inch	Size	Inches	Size
200*	12	0.200	34*	9/32	#6	0.286	#2
260*	11.5	0.260	34*	9/32	#5	0.280	#2
300*	10.7	0.300	32.5	9/32	#4	0.275	#2
340	9.5	0.340	32	9/32	#2.5	0.267	#2
400	9.0	0.400	31.5	17/64	#2	0.264	#2
500	8.1	0.500	31	17/64	#1	0.258	#1
600	7.2	0.600	30.5	17/64	#0.5	0.253	#1
700	6.1	0.700	31.5	17/64	#0.5	0.245	#1

*Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc.

*5MM AXIS® + AXIS® SPORT

0.204" ID 5MM SMALL-DIAMETER UNIFORM ACU-CARBON™

- Pre-installed 5MM (X) nocks
- 2" Blazer™ factory helical fletch (AXIS) 2" Bully™ (Sport)
- 5MM HIT® 8-32 inserts included
- Straightness ± .003" AXIS Sport ± .005"
- 5MM Acu-Carbon™
- Made In USA

* Available with HIT® or half-out inserts

INCLUDED



AXIS (comes with a choice of HIT OR Half-outs)

5MM HIT Insert
(16 grains) See chart for field point size.



AXIS Sport (comes with Half-outs only)

5MM Aluminum 8-32 Half-out
Uses 8-32 thread 5/16" field points. (25 grains)



5MM X Nock
(9 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR & HALF OUT	O.D.	5MM 8-32 1-PIECE HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inch	Size	Inches	Size
200*	12	0.200	34*	9/32	#6	0.286	#2
260*	11.5	0.260	34*	9/32	#5	0.280	#2
300*	10.7	0.300	32.5	9/32	#4	0.275	#2
340	9.5	0.340	32	9/32	#2.5	0.267	#2
400	9.0	0.400	31.5	17/64	#2	0.264	#2
500	8.1	0.500	31	17/64	#1	0.258	#1
600	7.2	0.600	30.5	17/64	#0.5	0.253	#1
700	6.1	0.700	31.5	17/64	#0.5	0.245	#1

*Fletched six-pack arrows are 32" max stock length.
Blazer is a registered trademark of the Bohning Company Ltd.

NEW

EASTON 5.0™ MATCH GRADE™

0.204" ID 5MM SMALL-DIAMETER LIGHTWEIGHT ACU-CARBON™

- Pre-installed 5mm Microlite™ nocks
- AAE™ Hybrid 26™ helical fletch
- 5MM HIT 8-32 inserts or 5MM Steel Half-out included
- Straightness ± .001"
- Acu-Carbon™
- Made In USA

INCLUDED



5MM HIT® Insert
See chart for field point size. (16 grains)



Match Grade HIT Collar
Uses 8-32 thread 5/16" field points. (13-21 grains)



NEW

5MM Microlite Nock
(8 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR & HALF OUT	O.D.	5MM 8-32 1-PIECE HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inch	Size	Inches	Size
200*	10.6	0.200	33.5	9/32	#4	0.273	#2
250*	9.5	0.250	33	9/32	#3	0.270	#2
300*	8.4	0.300	32.5	17/64	#2	0.264	#2
340	7.5	0.340	32	17/64	#1	0.258	#1
400	6.8	0.400	31.5	17/64	#0.5	0.253	#1
500	6.2	0.500	31	17/64	#0.5	0.249	#1

*Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc.

NEW

EASTON 5.0™

0.204" ID 5MM SMALL-DIAMETER LIGHTWEIGHT ACU-CARBON™

- Pre-installed 5mm Microlite™ nocks
- 2" Blazer™ vanes factory helical fletch
- 5MM HIT® 8-32 inserts or 5MM Steel Half-out included
- Straightness ± .003"
- Acu-Carbon
- Made In USA

INCLUDED



OR



NEW

5MM HIT Insert
See chart for field point size. (16 grains)

5MM 8-32 Steel Half-out
Uses 8-32 thread 5/16" field points. (50 grains)



NEW

5MM Microlite Nock
(8 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	MATCH GRADE HIT COLLAR & HALF OUT	O.D.	5MM 8-32 1-PIECE HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inch	Size	Inches	Size
200*	10.6	0.200	33.5	9/32	#4	0.273	#2
250*	9.5	0.250	33	9/32	#3	0.270	#2
300*	8.4	0.300	32.5	17/64	#2	0.264	#2
340	7.5	0.340	32	17/64	#1	0.258	#1
400	6.8	0.400	31.5	17/64	#0.5	0.253	#1
500	6.2	0.500	31	17/64	#0.5	0.249	#1


*Fletched six-pack arrows are 32" max stock length.
Blazer is a trademark of the Bohning Company Ltd.

SONIC 6.0™ + MATCH GRADE™

0.231" ID REDUCED-DIAMETER HIGHER VELOCITY ACU-CARBON™

- Pre-installed 6mm nocks
- AAE™ Hybrid 26™ helical fletch (Match Grade) 2" Blazer (Sonic 6.0)
- 6mm ST Inserts included
- Straightness ± .003" ± .001" (Match Grade)
- 6MM Acu-Carbon™
- Made In USA
- Match Grade is Pro Shop Exclusive

INCLUDED



Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.	6MM ST INSERT	SD 19 ADJUSTABLE POINT	MATCH GRADE HIT COLLAR
	GPI	Deflection in Inches	Inches	O.D. Inches	Inches	Size	Size	Size
250*	9.5	0.250	32.5	9/32	0.291	#2	NA	NA
300	8.8	0.300	32	9/32	0.286	#2	NA	#6
340	7.8	0.340	31.5	9/32	0.279	#2	ONE SIZE	#6
400	7.2	0.400	31	17/64	0.275	#1	ONE SIZE	#6
500	6.7	0.500	30.5	17/64	0.273	#1	ONE SIZE	#6
600	5.8	0.600	30.5	17/64	0.268	#1	ONE SIZE	#6

*Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc. Blazer is a trademark of the Bohning Company Ltd.

EASTON 6.5™ MATCH GRADE™

0.246" ID STANDARD DIAMETER ACU-CARBON™

- Pre-installed 6.5MM Microlite™ nocks
- AAE™ Hybrid 26™ helical fletched vanes
- 6.5MM anodized inserts included
- Straightness ± .001"
- 6.5MM Acu-Carbon™
- Made In USA

INCLUDED



Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
250*	10.0	0.250	32.5	5/16	0.301
300*	9.5	0.300	32.25	5/16	0.300
340	9.3	0.340	31.75	5/16	0.298
400	8.4	0.400	31	19/64	0.294
500	7.3	0.500	30.5	19/64	0.287

*Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc.

EASTON 6.5™ HUNTER CLASSIC™ & BOWHUNTER™

0.246" ID STANDARD DIAMETER ACU-CARBON™

- 6.5MM uniform USA made Acu-Carbon
- Pre-installed 6.5MM Microlite™ nocks
- 6.5MM inserts included
- Straightness: Hunter Classic ±.003" Bowhunter ±.005"
- Made In USA

INCLUDED



6.5MM Microlite Nock
(8 grains)



6.5MM Insert (Hunter Classic)
Uses 8-32 thread 5/16" field points. (23 grains)



6.5MM Insert (Bowhunter)
Uses 8-32 thread 5/16" field points. (23 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
250*	10.0	0.250	32.5	5/16	0.301
300*	9.5	0.300	32.25	5/16	0.300
340	9.3	0.340	31.75	5/16	0.298
400	8.4	0.400	31	19/64	0.294
500	7.3	0.500	30.5	19/64	0.287

*Fletched six-pack arrows are 32" max stock length.

EASTON 6.5™ WHITEOUT™

- 0.246" ID 6.5MM standard diameter ACU-Carbon™
- Pre-installed 6.5MM Super Nocks™
- Factory fletched
- 6.5MM anodized inserts
- Straightness ± .003"
- Made In USA

INCLUDED



6.5MM Insert
(23 grains)
Uses 8-32 thread 5/16" field points



6.5MM Microlite Nock
(8 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
300*	9.6	0.300	32.25	5/16	0.301
340	8.8	0.340	31.75	5/16	0.298
400	8.1	0.400	31.25	5/16	0.294
500	7.5	0.500	30.75	5/16	0.291



6MM VENTURE™

- 0.231" ID 6MM reduced-diameter carbon fiber
- Pre-installed 6mm H nocks
- Factory fletched
- 6mm ST RPS™ Inserts
- Straightness ± .005"

INCLUDED



6MM ST RPS 8-32 Insert
Uses 8-32 thread 5/16" field points. (18 grains)



6MM H Nock
(9 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	STOCK LENGTH	FIELD POINT	O.D.	6MM ST INSERT	SD 19 ADJUSTABLE POINT
	GPI	Inches	O.D. Inches	Inches	Size	Size
600	5.8	30.5	9/32	0.268	#1	ONE SIZE

CAMOHUNTER™ & GAMEGETTER™

- Pre-installed Super Nocks™
 - Factory fletched
 - RPS™ inserts included
 - 7075-T9 aluminum alloy
- CAMOHUNTER-Straightness: ± .002" / GAMEGETTER-Straightness: ± .003"
- Made In USA
 - Component specifications—see page 42

INCLUDED



RPS Insert



Super UNI Bushing®



6.5MM 3D Super Nock
(13 grains)

INCLUDED CAMOHUNTER (1916 only)



X UNI Bushing®



5MM X Nock™
(9 grains)

CAMOHUNTER

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	MINIMUM STOCK LENGTH	BUSHING WEIGHT	FIELD POINT
	GPI	Deflection in Inches	Inches	Grains	Inches
1916	10.0	0.627	31	9	5/16
2016	10.6	0.537	31	4	5/16
2018	12.3	0.468	31	4	19/64
2114	10.4	0.513	32	7	19/64
2117	12.0	0.413	31.5	7	5/16
2213	9.8	0.464	32	9	11/32
2215	10.7	0.425	31.5	9	11/32
2216	12.0	0.382	31.5	9	11/32
2219	13.8	0.342	32	9	11/32
2317	13.3	0.303	32	11	11/32
2413	10.5	0.372	32.5	12	11/32

GAMEGETTER

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	MINIMUM STOCK LENGTH	BUSHING WEIGHT	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Grains	Inches	Inches
340	11.7	0.349	31	11	19/64	0.296
400	10.6	0.413	31	7	5/16	0.291
500	10.0	0.537	31	4	5/16	0.289



Additional Components Are Available & Sold Separately. See Pages 26 & 27.

4.0MM 5.0MM 6.0MM 6.5MM

5MM CARBON LEGACY™

0.204" ID 5MM FRED EICHLER EDITION

- Pre-installed 5MM (X) nocks™
- 4" shield-cut helical fletch feathers
- 5MM HIT® 8-32 inserts included
- Straightness ± .003"
- 5MM carbon construction
- Woodgrain graphics
- High visibility white paint crest

INCLUDED



5MM HIT Insert
(16 grains) See chart for field point size.



5MM X Nock
(9 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.



SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.	MATCH GRADE HIT COLLAR & HALF OUT	5MM 8-32 1-PIECE HALF OUT
	GPI	Deflection in Inches	Inches	O.D. Inches	Inches	Size	Size
340	9.8	0.340	34	9/32	0.272	#4	#2
400	8.9	0.400	34	17/64	0.267	#2.5	#2
500	8.0	0.500	34	17/64	0.261	#2	#1
600	7.0	0.600	34	17/64	0.256	#1	#1
700	6.8	0.700	34	17/64	0.254	#1	#1

6.5MM CARBON LEGACY™

0.246" ID STANDARD DIAMETER CARBON

- Pre-installed 6.5MM 3D Supernocks™
- Straightness: ± .005"
- 4" shield-cut helical fletch feathers
- 6.5MM carbon construction
- Woodgrain graphics
- High visibility white paint crest

INCLUDED



6.5MM 3D Super Nock
Uses 8-32 thread 5/16" field points. (13 grains)



6.5MM Insert
(23 grains)

Additional Components Are Available & Sold Separately. See Pages 26 & 27.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	Inches	Inches
340	10.1	0.340	34	5/16	0.307
400	9.3	0.400	34	19/64	0.301
500	8.3	0.500	34	19/64	0.296
600	7.5	0.600	34	19/64	0.291
700	7.1	0.700	34	19/64	0.289



CROSSBOW

EASTON 9MM™

- Factory installed inserts and nocks
- High-strength carbon

LENGTH (inches)	APPROXIMATE WEIGHT (grains)*	GPI	I.D.	O.D.
20	379	8.9	0.300	0.344
22	397	8.9	0.300	0.344

XX75 MAGNUM™

- Hard-anodized finish
- 7075-T9 aluminum alloy
- 2219 size
- Easy target pull

LENGTH (inches)	APPROXIMATE WEIGHT (grains)*	GPI	I.D.	O.D.
20	430	13.8	0.306	0.344
22	460	13.8	0.306	0.344

WHITEBOX™

- Halfmoon nocks
- 4" vanes inserts
- 100% straightness checked
- High strength carbon
- Weight matched
- Field points installed

LENGTH (inches)	APPROXIMATE WEIGHT (grains)*	GPI	I.D.	O.D.
20	340	8.9	0.300	0.344

NOCKS



Flatback Nock
(9 Grains)



Halfmoon Nock
(11 Grains)

POINTS/INSERTS



8-32 Match Grade Point
(100, & 125 grains)



8-32 Multi Point
(100, & 125 grains)



RPS Insert (2219)
(26 grains)



9MM Insert
(61 grains)



9MM Brass Insert
(100 Grains)



*Estimated finished arrow weight with 100-grain point allowance.

WHITEBOX™ & BEGINNER ARCHERY

- Vanes, inserts, nocks, and field points included
- Sold ready to shoot
- 100% straightness checked
- 29.5 arrow length (ATA standard)
- For bows up to 70 lbs.
- 420 grain total weight
- Weight matched

INCLUDED



8-32 MULTI POINT
(100 grains)



6.5MM INSERT
(23 grains)
Uses 8-32 thread 5/16" field points



6.5MM MICROLITE™ SUPER NOCK™
(8 grains)

BEGINNER RECURVE BOW

The Easton® beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron™ string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and arm guard

Kit colors: Black and Realtree® Xtra



SCOUT 2™

- Durable fiberglass construction
- Over Nock – installed
- Sleeve Point – installed
- 26"



Download our App or scan
to find correct arrow size

EASTON

COMPONENTS

4MM



4MM Match Grade Half-out
Steel/Steel 150 grains (sizes #3, #4 & #5 only)
Uses 8-32 thread 5/16" field points. (75 grains)



4MM Match Grade Half-out
Titanium/Steel 100 grains
Uses 8-32 thread 5/16" field points. (75 grains)



4MM Match Grade Half-out
Aluminum/Steel 75 grains
Uses 8-32 thread 5/16" field points. (75 grains)



4MM Match Grade Half-out
Aluminum/Aluminum 55 grains
Uses 8-32 thread 5/16" field points. (75 grains)



4MM Aluminum Half-out
50 grains
Uses 8-32 thread 5/16" field points. (75 grains)



4MM Titanium Half-out
55 grains
Uses 8-32 thread 5/16" field points. (75 grains)



4MM Steel Half-out
95 grains
Uses 8-32 thread 5/16" field points. (75 grains)



Deep Six™ Steel G (4MM) HIT® Insert (20 Grains)
Fits (4MM 0.166") diameter carbon, A/C & FMJ
Uses Deep Six thread points



4MM Microlite™ Nock (6 grains)
Throat: 0.112
Dozen Pack and 100-count Bulk
● Bright Green ● Orange ● Red
● Smoke ○ White ● Yellow



4MM G Nock™ (6 grains)
Throat: Small=0.088, Large= 0.098
Dozen Pack and 100-count Bulk
● Blue ○ White ● Green ● Orange ● Red
● Lemon Lime ● Pink ● Smoke ● Black



4MM Nock Collar
(3 grains)

5MM



5MM Aluminum 8-32 Half-out
25 grains



Brass X (5MM) HIT® INSERT
75 – 50 Grains



5MM X HIT® Insert
16 grains



5MM Steel 8-32 Half-out
75 grains



Match Grade HIT Collar
(13-21 grains)
Uses 5/16" field points



5MM Microlite Nock™
(8 grains)

- Bright Green ● Smoke
● Orange ○ White
● Red ● Yellow



5MM Match Grade Half-out Aluminum/Aluminum
Uses 8-32 thread 5/16" field points. (55 grains)

NEW



5MM Match Grade Half-out Aluminum/Steel
Uses 8-32 thread 5/16" field points. (75 grains)

NEW



5MM 8-32 Steel 1-piece Half Out
Uses 8-32 thread 9/32" field points. (50 grains)

NEW



5MM X Nock™
Throat: 0.111
Dozen Pack and 100-count Bulk
9 grains

- Bright Green ● Smoke
● Orange ○ White
● Red ● Yellow

6MM



6MM ST RPS™ Insert
18 grains



6MM Brass Insert
75 – 50 grains



Match Grade HIT Collar (Brass insert only)
(13-21 grains)
Uses 8-32 thread 5/16" field points



Superdrive 19 Adjustable Point
(90 grains)



6MM H Nock™ (9 grains)
Throat: 0.111
Dozen Pack and 100-count Bulk

- Bright Green ● Orange ● Red
● Smoke ○ White ● Yellow


6.5MM




6.5MM™ Brass Insert
50-75 grains



6.5MM™ Insert
23 grains




6.5MM™ Insert
23 grains



6.5MM CB™ Point
Fits S (6.5MM) diameter arrows
Point Weight – 80 & 100 Grains




6.5MM MicroLite™ Super Nock™
Throat: 0.108
Dozen Pack and 100-count Bulk
8 grains
● Bright Green ● Orange ● Red
● Smoke ○ White ● Yellow




6.5MM 3D Super Nock™
Throat: 0.103
Dozen Pack and 100-count Bulk
13 grains
● Blue ○ White ● Green ● Orange ● Red
● Lemon Lime ● Pink ● Smoke ● Black

CROSSBOW



9MM Crossbow Insert
61 Grains



9MM Brass Insert
100 Grains



9MM Halfmoon Nock
100 Grains
○ White ● Green ● Orange



Aluminum (2219)
40 Grains



9MM Flatback Nock
9 grains
○ White ● Green ● Orange

FIELD POINTS



8-32 Match Grade™ Point
11/32" – 100, 125, 150 grains
5/16" – 100, 125 grains
9/32" – 100, 125 grains
17/64" – 100, 125 grains
19/64" – 100, 125 grains



Multi Point™
11/32" – 100, 125 grains
5/16" – 100, 125 grains
9/32" – 100, 125 grains
17/64" – 100, 125 grains
19/64" – 100, 125 grains



Deep Six™ Field Points
Fits 4MM & 5MM
with Deep Six thread inserts
100 Grains

For aluminum component info—see arrow product pages.

See arrow model pages for component diameter selection.

EZ FLETCH™

(A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"



(B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"



(C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"



(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"



VANES

All weights are within ±0.5 grain

2" BULLY™ VANES BY BOHNING®

Ultra-stiff design for high speed stability



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
200	2.00	.568	6.5	● Fire Orange ● Bright Green ● Red ● Yellow ○ White	100 Ct. 36Ct.

3" BTV™ VANES BY AAE™



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	● Yellow ● Bright Green ● Red ● Fire Orange ○ White	100 Count

EZ Fletch is a trademark of Arizona Rim Country, Inc.
Bohning is a registered trademark of the Bohning Company Ltd.
AAE is a trademark of Arizona Archery Enterprises Inc.

VANES

3" DIAMOND HD™ VANES BY BOHNING®



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	● Bright Green ● Yellow ● Red ○ White ● Orange	100-ct.

DIAMOND™ VANES BY AAE™



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
175 235 280 380	1.750 2.375 2.875 3.875	.375 .375 .500 .500	3 4 6 8	● Bright Green ● Blue ● Yellow ● Fire Orange ○ White ● Black ● Hot Pink	100-ct.

TITE FLIGHT™ VANES BY AAE™

Special rib adds stiffness to cut in-flight flutter and noise



Size	Length (in)	Height (in)	Weight (grains)	Colors	Packaging
200	2.00	.330	4	● Hot Pink ○ White ● Bright Green ● Black ● Fire Orange ● Yellow ● Blue	100-ct.

SPIN WING™ VANES

1.75-inch vanes available in right • Packaging - 50-count bag



Colors ● Black ○ White ● Blue ● Red ● Yellow
Spin Wing is a trademark of Range-O-Matic Archery Company.

Bohning is a registered trademark of the Bohning Company Ltd.
AAE is a trademark of Arizona Archery Enterprises Inc.

TOOLS & SUPPLIES

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz.
- HIT approved



CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



BCY™ POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool



FASTSET™ VANE GEL

- Sizes: 3 gram



HIT™ EPOXY SINGLE USE

- Provides a permanent bond
- Flexible, non-brittle formulas



UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz.



QUICKBOND™ PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



FLETCH-TITE® PLATINUM

- Size: 22-gram tube



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Also available in 10" shop stick



FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



WEDGE ARROW PULLER

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools



BCY is a trademark of BCY Bowstring.

Fletch-Tite® is a registered trademark of Bohning Company LTD.

TOOLS & SUPPLIES

ELITE NOCK AND D-LOOP PLIERS

- Maximizes mechanical advantage for tightest possible D-loops
- Patented dual-jaw design
- Convenient and versatile archery tool
- Six tools in one



ARCHERY OMNI TOOL BY FIX-IT STICKS®- 17 PIECE

- Integrates 17 of the most popular Standard & Metric Hex, and Star bit sizes into the most compact archery tool ever produced
- Snaps together in a T-shape for leverage
- Includes the following bit sizes:
 - Standard Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050"
 - Metric Sizes: 1.5, 2.5, 3.0
 - Star Tip Sizes: T10, T15, T20

PRO ARCHERY NEEDLE-NOSE PLIERS

- A must have for any serious bow mechanic
- Rubber-coated handle
- Needle-nose plier design with archery specific features for D-loop stretching and hot-melt point installation



PRO HEX FOLD UP SET - STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and a 1/8" flat blade screwdriver



PRO HEX STUBBY 10 PIECE "L" WRENCH SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



Omni Tool is a trademark of Fix It Sticks.

TOOLS & SUPPLIES

BOW SQUARES

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up



9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to 27/64" diameters



ARCHERY ESSENTIALS™ TOOL KITS

- Kit items save 30% versus items sold separately
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors

12 AND 8-PIECE KITS INCLUDE:

- Extra large folding allen wrench set
- Nock installation & removal tool
- Wedge arrow puller
- Zippered case cube
- Bowstring wax
- Serving thread
- D-Loop rope
- Broadhead wrench

12-PIECE KIT ADDS:

- D-Loop pliers
- Bow-square-L model
- Small folding allen wrench set
- Arrow prep tool kit



8-PIECE VALUE PACK



12-PIECE PRO SHOP

SHOOTING ACCESSORIES



STAY SHARP™ BROADHEAD CASE

- Grippers ensure broadhead sharpness by supporting ferrules without contacting blades
- Hold six mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads
- Dimensions: approximately 5"W x 4"H x 2"D

DELUXE ARM GUARDS

- Progressive designs molded from durable polycarbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and "dog" bone shapes
- Colors: blue, red, yellow, and smoke



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL, and XXL
- Color: black/white



COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: black



STIFF WRIST SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: black, camo, green, pink, blue, red, and orange



DELUXE PARACORD DIAMOND WRIST SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: black, camo, green, pink, blue, red, and orange



NEOPRENE WRIST SLING


- Durable, lightweight neoprene construction
- Easy-adjust strap



COMPETITION QUIVERS

ELITE™ FIELD QUIVER WITH BELT

- European-inspired luxurious design
- Technical synthetic leather construction
- Infinitely adjustable and sturdy, Elite quiver belt uses secure T-style buckle
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet, customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included-release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white

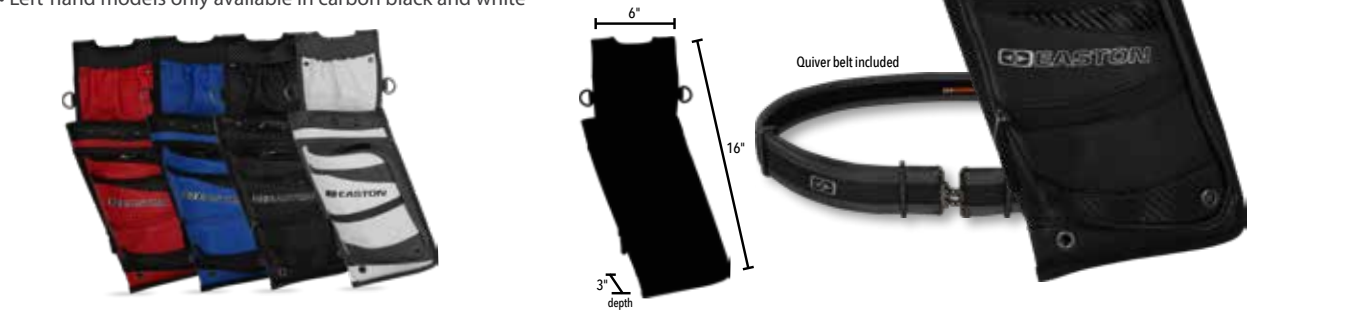

ELITE™ QUIVER BELT

- One size fits most
- T-style buckle
- Included with Elite quivers—also sold separately
- Colors: red, blue, grey, carbon black, and white



ELITE™ RELEASE POUCH



ELITE™ TAKEDOWN HIP QUIVER WITH BELT

- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, Elite quiver belt with T-style buckle for secure operation-included
- Allows quiver body tube to separate from belt loop for easy storage
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white



*Modular system can accommodate multiple configurations

DELUXE FIELD QUIVER WITH BELT

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Adjustable, sturdy Deluxe Quiver belt with T-style buckle included
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch sold separately
- Colors: silver, red, blue, and black
- Left-hand models only available in black and silver



DELUXE QUIVER BELT

- One size fits most
- Innovative hook-and-loop adjustment
- Easy on/off T-buckle connection



DELUXE RELEASE POUCH



DELUXE TAKEDOWN HIP QUIVER WITH BELT

- Allows quiver body tube to separate from belt loop for easy storage
- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Adjustable Deluxe Quiver Belt with T-style buckle included
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory-attachment rings
- Colors: silver, red, blue, and black
- Left-hand models only available in black and silver



RECREATIONAL QUIVERS

FLIPSIDE™ 4-TUBE HIP QUIVER WITH BELT

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop pocket for right/left side wear
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: black, red, blue, Realtree Edge®, & ranger green



FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: black, red, blue, Realtree Edge® & ranger green



FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: black, red, blue, Realtree Edge® & ranger green

REPLACEMENT FLIPSIDE™ ARROW TUBE



REPLACEMENT BELT CLIP



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

TRAVEL BOWCASES

BOWTRUK™ GEN 2 4716, 4017 & 3616 TRAVEL BOWCASE

- Accommodates two bows up to 47 inch overall length
- Ballistic nylon shell with TPU coated exterior for durability
- Six interior & exterior accessory pockets for bow-sights, gear, and arrows
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Double seatbelt-style bow retaining straps
- Padded carry handle
- Compatible with Easton arrow totes & boxes
- Hybrid hard/soft shell perimeter protection
- Dark grey

SPECIFICATIONS

4716—47" L X 16" W X 9" H 19 lbs.

4017—40" L X 17" W X 9" H 16 lbs.

3616—36" L X 16" W X 9" H 14 lbs.



BOWCASES

WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with Easton Deluxe Hip/Field quivers
- Dense 360° exterior/corner cam padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: black



BOWCASES

WORKHORSE MAX™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Ten interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Shoulder strap included
- Colors: charcoal grey, tundra tan



WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Eight interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable hook-and-loop bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: charcoal, Realtree Edge™



BOW-GO™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow mounted quivers and maximum inside storage
- Four interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: black, ranger green, Realtree Edge™, olive/grey



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

BOWCASES

MICRO FLATLINE™ 3618

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors: black/grey, tundra tan, Realtree Edge™



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

GENESIS™ 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: red, blue, black and pink
- 40" L x 14" H

Genesis is a trademark of Brennan Industries.



BOWSLICKER™ BY ALPINE INNOVATIONS

- Easy, secure carry with patented limb loop design
- Quick and quiet removal
- Keep cams and strings protected from brush
- Fits all compound bows, including parallel limbs, up to 36" axle-to-axle
- Color: olive green

Crossbow Slicker™ also available.



Officially Licensed Product
Protected by US Patents:
9,038,878 & 9,310,158

Bowslicker and Croosbow Slicker are trademarks of Alpine Innovations.



BOWCASE ACCESSORIES

CASE CUBES™ BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
 - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
 - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
 - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
 - Round Arrow Tote (12-arrow) - adjustable length



PACKS

CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with great features
- High-denier fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: grey, blue, red, and black



DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks

ALLOY SHAFT AND COMPONENT SPECIFICATIONS

Size	Shaft Weight		Spine @ 28" Span	Minimum ¹ Stock Length		UNI System			Adjustable Points	NIBB Point	One-piece Bullet Point	RPS Insert Alum.	RPS Point Size
	XX75	X7		XX75	X7	UNI Bushing	X Nock Bushing	Super UNI Bushing					
	Grains per Inch		Deflection in Inches	Inches		Grains	Grains	Grains	Grains	Grains ²	Grains	Grains ²	Grains
1214	5.9	—	2.501	25.5	—	—	—	—	—	—	45	—	—
1416	7.2	—	1.684	26.25	—	2	—	—	—	46	50	—	—
1514	—	6.8	1.384	—	25	5	—	—	—	61 ⁹	50	—	—
1516	7.3	—	1.405	26.75	—	3	—	—	—	48	50	—	—
1614	—	7.7	1.157	—	26.75	5	—	—	—	51	50	—	—
1616	8.4	—	1.082	27.5	—	5	—	—	—	56	60	—	—
1714	—	8.1	0.967	—	27.75	7	—	—	—	56	60	—	—
1716	9.0	—	0.882	29	—	7	—	—	—	60	65	10	17/64
1814	—	8.6	0.804	—	29.5	8	—	—	—	60	65	—	—
1816	9.3	—	0.759	29	—	8	4	—	—	63	75	12	9/32
1820	12.2	—	0.595	29	—	—	—	—	—	—	59	—	—
1913	8.3	—	0.738	31	—	9	—	—	—	64	90	18	5/16
1914	—	9.3	0.663	—	29.5	9	—	—	—	64	90	—	—
1916	10.0	—	0.627	30	—	9	7	—	—	72	90	16	5/16
2013	9.0	—	0.616	32	—	—	—	5	—	68	90	21	5/16
2014	—	9.6	0.584	—	31½	—	—	5	100	71	90	—	—
2016 (500)	10.6	—	0.537	31	—	—	—	4	—	—	90	20	5/16
2018	12.3	—	0.468	30.5	—	—	—	4	—	—	90	19	5/16
2114	9.9	9.9	0.513	30	31	—	—	7	—	78	90	25	5/16
2117 (400)	12.0	—	0.413	31.5	—	—	—	7	—	—	100	25	5/16
2213	9.8	9.9	0.464	30.5	32	—	—	9	—	88	90	30	11/32
2214	—	10.4	0.431	—	31.9	—	—	9	100	103	100	—	—
2215	10.7	9.5	0.425	31.5	—	—	—	9	—	—	100	30	11/32
2216	12.0	—	0.382	32	—	—	—	9	100	—	100	29	11/32
2219	13.8	—	0.342	32	—	—	—	9	—	—	100	29	11/32
2312	—	9.5	0.429	—	31.75	—	—	11	—	99	100	37	11/32
2314	10.7	10.8	0.377	32	32.25	—	—	10	100	—	100	34	11/32
2315 (340)	11.7	11.7	0.340	32	32.6	—	—	11	100	—	100	37	11/32
2317	13.3	—	0.303	32	32.75	—	—	11	100	—	100	37	11/32
2318	—	13.7	0.304	—	32.75	—	—	11	—	—	200	—	—
2413	10.4	10.5	0.372	—	34	—	—	12	—	110	100	40	11/32
2512	—	10.3	0.329	—	33	—	—	15	—	108	100	52	11/32
2613	—	11.5	0.272	—	33	—	—	17	—	—	150	58	3/8
2712	—	11.3	0.267	—	33	—	—	19	200	—	150/300	—	—

— Indicates not available
1 Length is approximate stock shaft length for each size.
2 NIBB point grain weights are ±0.5 grain. All other components are ±1 grain

Every effort has been made to insure the accuracy of this catalog. Graphics and images are for illustration purposes only. Due to on-going efforts to improve our products, Easton reserves the right to make changes without notice.



WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE AT WWW.BSAFE.WS OR 877-INFO-ETP (877-463-6387).

CHECK EVERY ARROW, EVERY SHOT

ARROW DAMAGE

Any arrow can be damaged, even when new. A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. Damage to an arrow shaft, or any of its components, may occur from improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection information at www.eastonarchery.com/warning-use/). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, DISCARD THE ARROW.

WARNING! NEVER SHOOT A DAMAGED ARROW.

A loose or damaged nock may indicate a damaged arrow shaft or otherwise be dangerous. Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose or is damaged, DISCARD THE ARROW.

WARNING! NEVER SHOOT AN ARROW WITH A LOOSE OR DAMAGED NOCK.

BOW INSPECTION

Before shooting any arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at www.eastonarchery.com/shaft-selector/). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage. **WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.**

ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:

1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel, look and listen for cracking (Figure 1). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**



2. While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (Figure 2). If the arrow “relaxes” or twists easily, the carbon has been damaged. DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.** A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**



CARBON ARROW CUTTING

Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

SOLVENTS

CAUTION: When removing fletchings, or for any other reason, do not soak any carbon arrow shaft in solvents. This can weaken the resin that bonds the carbon fibers. (For directions on arrow set up, refer to the Easton Tuning Guide.)

WARNING! NEVER SHOOT A DAMAGED ARROW.

To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.



WARNING: Cancer and Reproductive Harm — www.P65Warnings.ca.gov

Some of the products listed in this Product Guide may be subject to California Proposition 65 warnings requirements. See product packaging or website for specific warning information. This Product Guide is intended for informational purposes only, not a solicitation for product sales.

MADE IN USA SINCE 1922



 **EASTON**
EASTONARCHERY.COM