



CHAMPIONSHIPS
BUILT INTO EVERY SHAFT

EASTON

TARGET 2025

X10[®]

0.128" ID 3.2MM ALUMINUM CARBON

- High-strength carbon fiber bonded to a 7075 alloy core
- Straightness: ± .001"
- Weight tolerance: ± 0.5 grains in precise weight codes
- Barreled profile
- Designed for recurve bows
- Components sold separately
- Made In USA



COMPONENTS



NEW

3.2MM X10 Ballistic Tungsten One Piece Point
(100 grains) Fits all sizes.



3.2MM X10 Ballistic Tungsten Break-off Point
(100-120 grains) Fits all sizes.



3.2MM X10 Stainless Steel Break-off point
(80-100, 100-120 grains) Fits all sizes.



3.2MM X10 Pin
(8 grains)



Pin Nock
(2 grains)



3.2MM X10 Nock Collar
(3 grains)



G Pin Nock™ (compound)
(4 grains)

| Spine | Shaft Weight GPI | Shaft O.D. Inches | Stock Length Inches | Front Max Trim Inches | 3.2MM X10 Pin Fitment | 3.2MM X10 Point Fitment | 3.2MM X10 Nock Collar |
|-------|------------------|-------------------|---------------------|-----------------------|-----------------------|-------------------------|-----------------------|
| 325 | 9.2 | .221 | 34.25 | 6.0 | #1 | All | #1 |
| 350 | 8.8 | .218 | 34.00 | 6.0 | #1 | All | #1 |
| 380 | 8.9 | .215 | 33.75 | 6.0 | #1 | All | #1 |
| 410 | 8.5 | .212 | 33.75 | 5.0 | #1 | All | #1 |
| 450 | 8.1 | .209 | 33.50 | 5.0 | #1 | All | #1 |
| 500 | 7.8 | .206 | 32.00 | 3.5 | #1 | All | #1 |
| 550 | 7.5 | .203 | 31.00 | 3.0 | #1 | All | #1 |
| 600 | 7.0 | .200 | 30.00 | 3.5 | #1 | All | #1 |
| 650 | 6.8 | .197 | 29.00 | 3.5 | #1 | All | #1 |
| 700 | 6.7 | .194 | 29.00 | 3.5 | #1 | All | #1 |
| 750 | 6.4 | .191 | 29.00 | 3.5 | #1 | All | #1 |
| 830 | 6.2 | .188 | 28.50 | No Limit | #1 | All | #1 |
| 900 | 5.8 | .185 | 28.00 | No Limit | #1 | All | #1 |
| 1000 | 5.3 | .182 | 28.00 | No Limit | #1 | All | #1 |

1 Due to the barrel design of the X10, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Nominal O.D. at mid-point of shaft. Ends are smaller.

3 Recommended that no more than these lengths be cut from the front of the shaft.

X10[®] PROTOUR[™]

0.128" ID 3.2MM ALUMINUM CARBON

- High-strength carbon fiber bonded to a 7075 alloy core
- Straightness: ± .001"
- Weight tolerance: ± 0.5 grains in precise weight codes
- Tapered profile
- Designed for compound bows
- Components sold separately
- Made In USA



COMPONENTS



NEW

3.2MM X10 Ballistic Tungsten One Piece Point
(100 grains) Fits all sizes.



3.2MM X10 Ballistic Tungsten Break-off Point
(100-120 grains) Fits all sizes.



3.2MM X10 Stainless Steel Break-off point
(80-100, 100-120 grains) Fits all sizes.



3.2MM X10 Pin
(8 grains)



Pin Nock
(2 grains)



3.2MM X10 Nock Collar
(3 grains)



G Pin Nock™ (compound)
(4 grains)

| Spine | Shaft Weight GPI | Shaft O.D. Inches | Stock Length Inches | Front Max Trim Inches | 3.2MM X10 Pin Adapter Fitment | 3.2MM X10 Point Fitment | 3.2MM X10 Nock Collar |
|-------|------------------|-------------------|---------------------|-----------------------|-------------------------------|-------------------------|-----------------------|
| 340 | 8.8 | .213 | 34.00 | 7.0 | #2 | All | #5 |
| 380 | 8.4 | .207 | 34.00 | 7.0 | #2 | All | #5 |
| 420 | 8.0 | .202 | 33.75 | 6.5 | #2 | All | #4 |
| 470 | 7.6 | .198 | 33.25 | 6.0 | #2 | All | #4 |
| 520 | 7.3 | .194 | 32.00 | 5.5 | #2 | All | #3 |
| 570 | 6.9 | .191 | 31.00 | 5.0 | #2 | All | #3 |
| 620 | 6.7 | .188 | 30.00 | 4.5 | #2 | All | #3 |
| 670 | 6.5 | .186 | 29.75 | 4.0 | #2 | All | #2 |
| 720 | 6.2 | .183 | 29.50 | No Limit | #2 | All | #2 |
| 770 | 6.0 | .181 | 29.00 | No Limit | #2 | All | #2 |

1 Due to the taper design of the X10 Protour, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger-diameter nock end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6-7 grains.

2 Nominal O.D. at mid-point of shaft. Front end is smaller.

3 Recommended that no more than these lengths be cut from the front of the shaft.

X10[®] PARALLEL PRO[™]

0.167" ID 4MM ALUMINUM CARBON

- High-strength carbon fiber bonded to a 7075 alloy core
- Straightness: ± .001"
- Weight tolerance: ± 0.5 grains in precise weight codes
- Parallel profile
- Components sold separately
- Made In USA



COMPONENTS



Match Grade 4MM HL Stainless Steel Break-off Point
(80 - 130 grains)



4MM Pin
(9 grains)



4MM G Nock[™]
(7 grains)



4MM Microlite[™] Nock
(6 grains)



Pin Nock
(2 grains)



G Pin Nock[™](compound)
(4 grains)



4MM Nock Collar
(3 grains)

| Spine | Shaft Weight GPI | Shaft O.D. Inches | Stock Length Inches | 4MM HL Point Fitment | 4MM Pin Fitment | 4MM Nock Collar |
|-------|---------------------|----------------------|------------------------|-------------------------|-----------------|-----------------|
| 250 | 10.8 | .245 | 34.00 | #4 | #4 | #7 |
| 300 | 9.5 | .236 | 33.63 | #4 | #4 | #5 |
| 340 | 8.9 | .231 | 33.63 | #3 | #4 | #4 |
| 380 | 8.3 | .227 | 32.63 | #3 | #4 | #4 |
| 420 | 7.8 | .224 | 32.63 | #3 | #3 | #4 |
| 470 | 7.3 | .220 | 32.63 | #2 | #3 | #3 |
| 520 | 7.0 | .217 | 31.63 | #2 | #2 | #3 |
| 570 | 6.6 | .215 | 31.63 | #2 | #2 | #2 |
| 610 | 7.3 | .218 | 31.00 | #2 | #2 | #3 |
| 660 | 6.9 | .215 | 30.75 | #2 | #2 | #2 |
| 710 | 6.5 | .213 | 30.50 | #2 | #2 | #2 |
| 810 | 6.1 | .209 | 30.00 | #1 | #2 | #2 |
| 880 | 5.9 | .207 | 29.50 | #1 | #1 | #1 |
| 1000 | 5.5 | .204 | 29.00 | #1 | #1 | #1 |
| 1150 | 5.5 | .208 | 28.50 | #1 | #1 | #1 |

A/C/E[™]

0.167" ID 4MM ALUMINUM CARBON

- High-strength carbon fiber bonded to a 7075 alloy core
- Straightness: ± .001"
- Weight tolerance: ± 0.5 grains in precise weight codes
- Barreled profile
- Designed for recurve bow
- Components sold separately
- Made In USA



COMPONENTS



Match Grade 4MM HL Stainless Steel Break-off Point
(80 - 130 grains)



4MM ML Stainless Steel Point
(50-70 grains)



4MM Pin
(9 grains)



4MM G Nock[™]
(7 grains)



4MM Microlite[™] Nock
(6 grains)



Pin Nock
(2 grains)



G Pin Nock[™] (compound)
(4 grains)



4MM Nock Collar
(3 grains)

| Spine | Shaft Weight GPI | Shaft O.D. Inches | Stock Length Inches | Max Trim Inches | 4MM HL Point Fitment | 4MM ML Point Fitment | 4MM Pin Fitment | 4MM Nock Collar |
|-------|---------------------|----------------------|------------------------|--------------------|-------------------------|-------------------------|--------------------|--------------------|
| 370 | 7.9 | .230 | 32.62 | 4.0 | #1 | #1 | #1 | #1 |
| 400 | 7.5 | .230 | 32.62 | 4.0 | #1 | #1 | #1 | #1 |
| 430 | 7.0 | .224 | 32.62 | 5.5 | #1 | #1 | #1 | #1 |
| 470 | 6.8 | .223 | 32.62 | 6.5 | #1 | #1 | #1 | #1 |
| 520 | 6.7 | .216 | 31.62 | 4.5 | #1 | #1 | #1 | #1 |
| 570 | 6.3 | .216 | 31.62 | 10.0 | #1 | #1 | #1 | #1 |
| 620 | 6.1 | .214 | 30.62 | No Limit | #1 | #1 | #1 | #1 |
| 670 | 5.9 | .212 | 30.62 | No Limit | #1 | #1 | #1 | #1 |
| 720 | 6.4 | .215 | 29.62 | 6.0 | #1 | #1 | #1 | #1 |
| 780 | 6.0 | .216 | 29.62 | No Limit | #1 | #1 | #1 | #1 |
| 850 | 5.7 | .213 | 28.62 | No Limit | #1 | #1 | #1 | #1 |
| 920 | 5.8 | .213 | 28.62 | 9.5 | #1 | #1 | #1 | #1 |
| 1000 | 5.7 | .213 | 28.62 | No Limit | #1 | #1 | #1 | #1 |
| 1100 | 5.1 | .205 | 28.62 | No Limit | #1 | #1 | #1 | #1 |
| 1250 | 5.1 | .205 | 26.62 | No Limit | #1 | #1 | #1 | #1 |

All sizes use: 4MM HL Point 80-130 grain #1 • 4MM ML Point 50-70 grain • 4MM Pin Adapter #1

AVANCE™/AVANCE™ SPORT

0.168" ID 4MM CARBON

AVANCE

- Acu-carbon™
- Straightness: ± .002"
- Parallel profile
- Weight tolerance ± 1 grain
- Components sold separately

AVANCE SPORT

- Acu-carbon™
- Straightness: ± .005"
- Parallel profile
- Weight tolerance ± 1 grain
- Fletched shafts include points & nocks
- Bare shafts—components sold separately

COMPONENTS



4MM ML Stainless Steel Point
(50-70, 70-90, 90-110, 100-120 grains)



4MM Pin
(9 grains)



Pin Nock
(2 grains)



G PinNock™ (compound)
(4 grains)



4MM Microlite™ Nock
(6 grains)



4MM G Nock™
(7 grains)



4MM Nock Collar
(3 grains)

| Spine | Shaft Weight GPI | Shaft OD Inches | Stock Length Inches | 4MM ML Point Fitment | | | | Nock Pin Adapter Fitment 4MM Pin | 4MM Nock Collar |
|-------|---------------------|--------------------|------------------------|----------------------|--------------|-------------|-------------|--|--------------------|
| | | | | 100-120 gr | 90-110 grain | 70-90 grain | 50-70 grain | | |
| 340 | 8.8 | .240 | 33.25 | #4 | | | | #4 | #6 |
| 400 | 7.9 | .234 | 33.00 | #4 | | | | #4 | #5 |
| 450 | 7.4 | .230 | 32.75 | #4 | | | | #4 | #4 |
| 500 | 6.9 | .227 | 32.50 | #4 | | | | #4 | #4 |
| 550 | 6.5 | .224 | 32.25 | | #3 | | | #3 | #4 |
| 600 | 6.5 | .224 | 32.00 | | #3 | | | #3 | #4 |
| 660 | 6.2 | .220 | 31.75 | | #3 | | | #3 | #3 |
| 730 | 5.7 | .217 | 31.25 | | #3 | | | #2 | #3 |
| 810 | 5.5 | .215 | 31.00 | | | #2 | | #2 | #2 |
| 900 | 5.2 | .211 | 30.25 | | | #2 | | #2 | #2 |
| 1000 | 4.9 | .209 | 30.00 | | | #2 | | #2 | #2 |
| 1150 | 4.9 | .208 | 29.25 | | | #2 | | #2 | #2 |
| 1400 | 4.2 | .205 | 29.00 | | | | #1 | #1 | #1 |
| 1600 | 3.8 | .202 | 28.75 | | | | #1 | #1 | #1 |
| 1800 | 3.6 | .200 | 28.50 | | | | #1 | #1 | #1 |
| 2000 | 3.4 | .198 | 28.25 | | | | #1 | #1 | #1 |



VECTOR™ / VECTOR™ READY TO SHOOT

0.167" ID 4MM CARBON

VECTOR

- Multi-layer wrapped 100% carbon-fiber construction
- Straightness checked
- 4MM parallel design
- Weight matched
- Fletched shafts include points, Diamond vanes and nocks
- Components sold separately with bare shafts

| Spine | Shaft Weight GPI | Shaft OD Inches | Stock Length Inches | 4MM Zinc Point 70 gr |
|-------|---------------------|--------------------|------------------------|-------------------------|
| 600 | 7.6 | .228 | 32.00 | #2 |
| 800 | 6.2 | .219 | 31.00 | #2 |
| 1000 | 5.4 | .214 | 30.00 | #2 |
| 1200 | 5.1 | .211 | 29.00 | #1 |
| 1400 | 4.2 | .206 | 28.00 | #1 |
| 1600 | 3.8 | .202 | 27.50 | #1 |
| 1800 | 3.6 | .200 | 27.00 | #1 |
| 2000 | 3.4 | .198 | 26.50 | #1 |

VECTOR READY TO SHOOT

- Cut to length with nocks & points installed
- Multi-layer wrapped 100% carbon-fiber construction
- Straightness checked
- 4MM parallel design
- Weight matched
- Fletched with 2" shield-cut feathers or Diamond vanes

| Spine | Shaft Weight GPI | Shaft OD Inches | Stock Length Inches | 4MM Zinc Point 70 gr |
|-------|---------------------|--------------------|------------------------|-------------------------|
| 600 | 7.6 | .228 | 32.00 | #2 |
| 800 | 6.2 | .219 | 31.00 | #2 |
| 1000 | 5.4 | .214 | 30.00 | #2 |
| 1200 | 5.1 | .211 | 29.00 | #1 |
| 1400 | 4.2 | .206 | 28.00 | #1 |

COMPONENTS



4MM N Nock™
(7 grains)



4MM Zinc Point
(70 grains)



PRO SHOP EXCLUSIVE

SONIC 6.0™ /SONIC 6.0™ MATCH GRADE

0.231" ID 6MM REDUCED-DIAMETER HIGH VELOCITY ACU-CARBON™

- Straightness: ± .003" Match Grade ±.001"
- AAE™ Hybrid 26™ helical fletch (Match Grade) 2" Blazer™ helical fletch (Sonic 6.0)
- Pre-installed 6MM nocks
- 6MM ST Inserts included
- Made in USA
- Match Grade is Pro Shop Exclusive



INCLUDED



6MM ST RPS™
8-32 Insert
(18 grains)



6MM H Nock™
(9 grains)

SOLD SEPARATELY



Adjustable Point System
Weight Module
(10, 20, 50 grains)



Adjustment Wrench



8-32 Match Grade™ Point
(100, & 125 grains)



8-32 Multi Point
(100, & 125 grains)




6MM Superdrive 19
Adjustable Point
(90 grains)



SD 19™ 4MM
Kick Out Bushing
(7.5 grains)




4MM Microlite™ Nock
(6 grains)



4MM G Nock™
(7 grains)



SD 19™ Pin
(11 grains)



Pin Nock
(2 grains)



G Pin Nock™ (compound)
(4 grains)



6MM Brass Break-Off 8-32 Insert
(Adjustable to 75-50 grains)

| SIZE | Shaft Weight | Spine @ 28" Span | Stock Length | Field Point | O.D. | 6MM ST Insert | 6MM Adjustable Point |
|------|--------------|----------------------|--------------|-------------|--------|---------------|----------------------|
| | GPI | Deflection in Inches | Inches | O.D. Inches | Inches | Size | Size |
| 250* | 9.5 | 0.250 | 32.50 | 9/32 | 0.291 | #2 | NA |
| 300 | 8.8 | 0.300 | 32.00 | 9/32 | 0.286 | #2 | NA |
| 340 | 7.8 | 0.340 | 31.50 | 9/32 | 0.279 | #2 | ONE SIZE |
| 400 | 7.2 | 0.400 | 31.00 | 17/64 | 0.275 | #1 | ONE SIZE |
| 500 | 6.7 | 0.500 | 30.50 | 17/64 | 0.273 | #1 | ONE SIZE |
| 600 | 5.8 | 0.600 | 30.50 | 17/64 | 0.268 | #1 | ONE SIZE |

*Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc. Blazer is a registered trademark of the Bohning Company Ltd.

VENTURE™

0.231" ID 6MM REDUCED-DIAMETER 100% CARBON FIBER

- Factory fletched
- Straightness: ± .003"
- Pre-installed 6mm nocks
- 6MM ST Inserts included

INCLUDED



6MM ST RPS™ 8-32 Insert
(18 grains)



6MM H Nock™
(9 grains)



8-32 Match Grade Point
(100, & 125 grains)



6MM Brass Break-Off 8-32 Insert
(Adjustable to 75-50 grains)



8-32 Multi Point
(100, & 125 grains)



6MM Superdrive 19™ Adjustable Point
(90 grains)

| SIZE | Shaft Weight | Spine @ 28" Span | Stock Length | Field Point | O.D. | 6MM ST Insert | 6MM SD 19 Adjustable Point |
|------|--------------|----------------------|--------------|-------------|--------|---------------|----------------------------|
| | GPI | Deflection in Inches | Inches | O.D. Inches | Inches | Size | Size |
| 600 | 5.8 | 0.600 | 30.50 | 9/32 | 0.268 | #1 | ONE SIZE |

SUPERDRIVE™ MICRO

0.167" ID MULTI-LAYER WRAPPED CARBON FIBER

- Straightness: ± .001"
- Weight tolerance: ± 1.0 grain
- Parallel profile
- Multi-layer wrapped 100% carbon-fiber constuction
- Specifically engineered for outdoor competition
- Components—sold separately

COMPONENTS



Match Grade 4MM HL Stainless Steel Break-off Point
(80 - 130 grains)



4MM Pin
(9 grains)



G Pin Nock™ (compound)
(4 grains)



Pin Nock
(2 grains)



4MM Microlite™ Nock
(6 grains)



4MM G Nock™
(7 grains)



4MM Nock Collar
(3 grains)

| Spine | Shaft Weight | Shaft OD | Stock Length | 4MM HL Point Fitment | Nock Pin Adapter Fitment | 4MM Nock Collar |
|-------|--------------|----------|--------------|----------------------|--------------------------|-----------------|
| | GPI | Inches | Inches | 80-130 grains | 4MM Pin | |
| 325 | 8.1 | .233 | 33.25 | #4 | #4 | #5 |
| 375 | 7.4 | .228 | 33.00 | #3 | #4 | #4 |
| 425 | 6.8 | .224 | 32.75 | #3 | #3 | #4 |
| 475 | 6.4 | .221 | 32.50 | #2 | #3 | #3 |
| 525 | 6.2 | .218 | 32.25 | #2 | #3 | #3 |
| 575 | 5.9 | .217 | 32.00 | #2 | #2 | #3 |
| 625 | 5.7 | .216 | 31.75 | #2 | #2 | #3 |
| 675 | 5.6 | .215 | 31.50 | #2 | #2 | #2 |
| 750 | 5.5 | .214 | 31.25 | #2 | #2 | #2 |
| 850 | 5.3 | .213 | 31.00 | #1 | #2 | #2 |
| 950 | 5.1 | .210 | 30.75 | #1 | #2 | #2 |

SUPERDRIVE™ 23

MULTI-LAYER WRAPPED CARBON FIBER

- Straightness: ± .001"
- Weight tolerance: ± 1.0 grain
- Outside diameter: 23/64" (9.3mm)
- World Archery compliant outside diameter
- Components—sold separately


COMPONENTS



SD 23™
Adjustable Point
(90 grains)



Adjustable Point System
Weight Module
(10, 20, 50 grains)

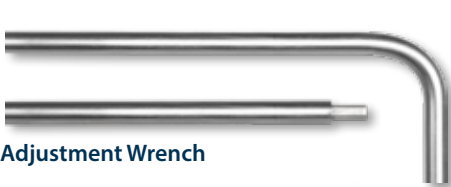

Adjustment Wrench



SD 23™ 4MM
Kick Out Bushing
(19 grains)



SD 23™ 4MM
Bushing
(18 grains)



4MM G Nock™
(7 grains)



4MM Microlite™
Nock
(6 grains)



SD 23™ Insert
(40 grains)



SD 23™ 6.5MM
Kick Out Bushing
(12 grains)



SD 23™ 6.5MM
Bushing
(19 grains)



Super 3D Nock™
(13 grains)



6.5MM Microlite™
Super Nock™
(8 grains)



SD 23™ Pin
(14 grains)



Pin Nock
(2 grains)



G Pin Nock™
(compound)
(4 grains)

| Spine | Shaft Weight | Shaft OD | Stock Length |
|-------|--------------|----------|--------------|
| | GPI | Inches | Inches |
| 325 | 7.4 | .361 | 33.25 |
| 375 | 6.9 | .359 | 32.00 |
| 425 | 6.4 | .356 | 31.50 |

SUPERDRIVE™ 25

MULTI-LAYER WRAPPED CARBON FIBER

- Straightness: ± .001"
- Weight tolerance: ± 1.0 grain
- Outside diameter: 25/64"
- Specifically engineered for indoor and 3D
- Components—sold separately

COMPONENTS



SD 25™ Adjustable Point
(90 grains)



Adjustable Point System Weight Module
(10, 20, 50 grains)



Adjustment Wrench



SD 25™ 4MM Kick Out Bushing
(24 grains)



4MM G Nock™
(7 grains)



4MM Microlite™ Nock
(6 grains)



SD 25™ 6.5MM Kick Out Bushing
(18.5 grains)



SD 25™ 6.5MM Bushing
(19 grains)



Super 3D Nock™
(13 grains)



6.5MM Microlite™ Super Nock™
(8 grains)



SD 25™ Pin
(14 grains)



Pin Nock
(2 grains)



G Pin Nock™ (compound)
(4 grains)


| Spine | Shaft Weight GPI | Shaft O.D. Inches | Stock Length Inches |
|-------|------------------|-------------------|---------------------|
| 290 | 7.8 | .396 | 32.00 |

SUPERDRIVE™ 27 + PRO


MULTI-LAYER WRAPPED CARBON FIBER

- Straightness: ±.005"/ Pro ± .001"
- Weight tolerance: ± 1.0 grains
- Outside diameter: 27/64"
- Points, and nocks—sold separately
- Components—sold separately


COMPONENTS




SD 27™ Adjustable Point
(100 grains)




Adjustable Point System Weight Module
(10, 20, 50 grains)

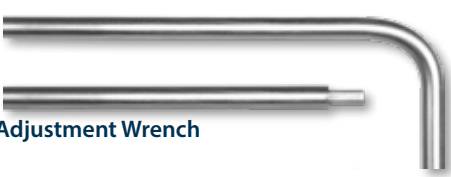


Adjustment Wrench




SD 27™ 4MM Kick Out Bushing
(26 grains)




SD 27™ 4MM Bushing
(18 grains)




4MM G Nock™
(7 grains)




4MM Microlite™ Nock
(6 grains)




SD 27™ 6.5MM Kick Out Bushing
(22 grains)



SD 27™ 6.5MM Bushing
(19 grains)



6.5MM Super 3D Nock™
(13 grains)



6.5MM Microlite™ Super Nock™
(8 grains)

| Spine | Shaft Weight GPI | Shaft O.D. Inches | Stock Length Inches |
|-------|------------------|-------------------|---------------------|
| 270 | 9.0 | .420 | 34.00 |

EASTON 6.5™ MATCH GRADE

0.246 " ID 6.5MM UNIFORM USA MADE ACU-CARBON™

- Pre-installed 6.5MM Microlite™ nocks
- AAE™ Hybrid 26™ helical fletched vanes
- 6.5MM anodized inserts included
- Straightness: ± .001"
- 6.5MM Acu-Carbon
- Made In USA

INCLUDED



6.5MM Microlite™ Nock
(8 grains)



6.5MM Insert
Uses 8-32 thread 5/16" field points. (23 grains)

SOLD SEPARATELY



8-32 Match Grade Point
(100, & 125 grains)



8-32 Multi Point
(100, & 125 grains)



6.5MM Brass Insert
(75, 50 grains)
See chart for field point size.



6.5MM CB™ Point
Fits S (6.5MM) diameter arrows
Point Weight – 80 & 100 Grains



| SIZE | Shaft Weight | Spine @ 28" Span | Stock Length | Field Point | O.D. |
|------|--------------|----------------------|--------------|-------------|--------|
| | GPI | Deflection In Inches | Inches | Inches | Inches |
| 250* | 10.0 | 0.250 | 32.50 | 5/16 | 0.301 |
| 300* | 9.5 | 0.300 | 32.00 | 5/16 | 0.300 |
| 340 | 9.3 | 0.340 | 31.50 | 5/16 | 0.298 |
| 400 | 8.4 | 0.400 | 31.00 | 19/64 | 0.294 |
| 500 | 7.3 | 0.500 | 30.50 | 19/64 | 0.287 |

*Fletched six-pack arrows are 32" max stock length.
AAE is a registered trademark of Arizona Archery Enterprises Inc.

EASTON 6.5™ CLASSIC & BOWHUNTER

0.246 " ID 6.5MM UNIFORM USA MADE ACU-CARBON™

- 6.5MM uniform USA made Acu-Carbon
- Pre-installed 6.5MM Microlite™ nocks
- 6.5MM inserts included
- Straightness: Hunter Classic™ ± .003" Bowhunter™ ± .005"
- Made In USA

INCLUDED



6.5MM Microlite™ Nock
(8 grains)



6.5MM Insert (Hunter Classic)
Uses 8-32 thread 5/16" field points. (23 grains)



6.5MM Insert (Bowhunter)
Uses 8-32 thread 5/16" field points. (23 grains)

SOLD SEPARATELY



8-32 Match Grade Point
(100, & 125 grains)



8-32 Multi Point
(100, & 125 grains)



6.5MM Brass Insert
(75, 50 grains)
See chart for field point size.



6.5MM CB™ Point
Fits S (6.5MM) diameter arrows
Point Weight – 80 & 100 Grains




| SIZE | Shaft Weight | Spine @ 28" Span | Stock Length | Field Point | O.D. |
|------|--------------|----------------------|--------------|-------------|--------|
| | GPI | Deflection In Inches | Inches | Inches | Inches |
| 250* | 10.0 | 0.250 | 32.50 | 5/16 | 0.301 |
| 300* | 9.5 | 0.300 | 32.00 | 5/16 | 0.300 |
| 340 | 9.3 | 0.340 | 31.50 | 5/16 | 0.298 |
| 400 | 8.4 | 0.400 | 31.00 | 19/64 | 0.294 |
| 500 | 7.3 | 0.500 | 30.50 | 19/64 | 0.287 |

*Fletched six-pack arrows are 32" max stock length.

RX7™

DUAL SPINE ALUMINUM

- Reduced spine tail section for recurve clearance
- Straightness: ± .001"
- Thick-wall front end resists tough European target materials
- Three spines—525, 475, and 420 in a 21, 22, and World Archery™ maximum 23 O.D.
- Components—sold separately

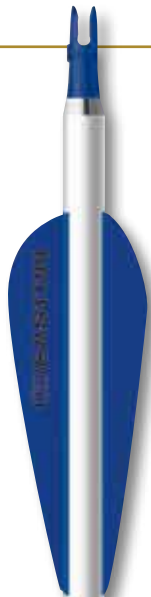


COMPONENTS



Adjustable
Bullet Point
(100 grains)



Adjustable Point System
Weight Module
(10, 20, 50 grains)

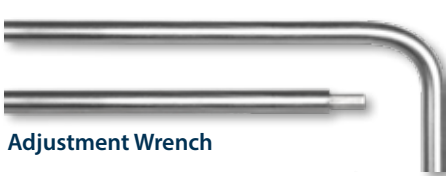

Adjustment Wrench



6.5MM Super
UNI Bushing®
(19 grains)



6.5MM Microlite™
Super Nock™
(8 grains)



Super 3D Nock™
(13 grains)

| Spine | Shaft Weight GPI | Shaft O.D. Inches | Minimum Stock Length Inches | Point Fitment | Bushing Fitment |
|--------|---------------------|----------------------|--------------------------------|---------------|-----------------|
| 23-420 | 10.4 | .365 | 33.75 | 2315 | 2315 |
| 22-475 | 9.7 | .348 | 33.50 | 2214 | 2214 |
| 21-525 | 9.3 | .328 | 32.50 | 2114 | 2114 |

X23™/X27™

7178-T9 AEROSPACE ALLOY 2-TONE FINISH

- Straightness: ± .001"
- Components—sold separately
- X23—2313, 2314, 2315 World Archery compliant
- Black point end for better target contrast
- Components—sold separately




COMPONENTS



Adjustable
Bullet Point
(90 grains)



Adjustable Point System
Weight Module
(10, 20, 50 grains)

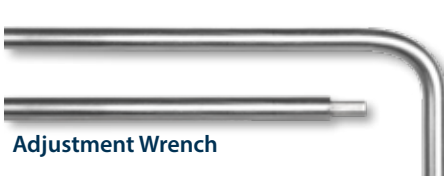

Adjustment Wrench



6.5MM Super UNI
Bushings®
(19 grains)



6.5MM Microlite™
Super Nock™
(8 grains)



6.5MM Super 3D Nock™
(13 grains)

X23

| Size | Spine | Shaft Weight GPI | Shaft O.D. Inches | Minimum Stock Length Inches | 6.5 Bushing Weight (grains) |
|------|-------|---------------------|----------------------|--------------------------------|--------------------------------|
| 2312 | .429 | 9.5 | .363 | 31.75 | 11 |
| 2314 | .397 | 10.8 | .357 | 32.25 | 10 |
| 2315 | .348 | 11.8 | .365 | 32.60 | 11 |
| 2318 | .304 | 13.7 | .365 | 34.75 | 11 |

X27

| Size | Spine | Shaft Weight GPI | Shaft O.D. Inches | Minimum Stock Length Inches | 6.5 Bushing Weight (grains) |
|------|-------|---------------------|----------------------|--------------------------------|--------------------------------|
| 2712 | .267 | 11.3 | .420 | 33.00 | 19 |

X7 ECLIPSE™

7178-T9 ALUMINUM ALLOY

- Hard-anodized black finish
- Straightness: ± .001"
- G-UNI/Super UNI bushing® installed
- Sizes 1514 through 2214 are World Archery compliant
- Components—sold separately



COMPONENTS



Bullet Point



RPS Insert



4MM G-UNI Bushing®
(for sizes 1914 and smaller)



6.5MM Super UNI Bushing®
(19 grains)



4MM G Nock™
(for sizes 1914 and smaller)
(7 grains)



6.5MM Super 3D Nock™
(13 grains)



4MM Microlite™ Nock
(6 grains)



6.5MM Microlite™ Super Nock™
(8 grains)

| Size | Spine | Shaft Weight GPI | Shaft O.D. Inches | Minimum Stock Length Inches | 4MM Bushing Weight (Grains) | 6.5MM Bushing Weight (Grains) | Bullet Point Weight (grains) | Insert Weight (grains) | Screw-In Point Size |
|------|-------|---------------------|----------------------|-----------------------------------|--------------------------------|----------------------------------|---------------------------------|---------------------------|------------------------|
| 2413 | .372 | 10.5 | .372 | 34.00 | NA | 12 | 100 | 40 | 11/32 |
| 2214 | .431 | 10.4 | .348 | 33.38 | NA | 9 | 100 | NA | NA |
| 2213 | .464 | 9.9 | .344 | 33.50 | NA | 9 | 90 | 30 | 11/32 |
| 2114 | .511 | 9.9 | .328 | 32.50 | NA | 7 | 90 | 25 | 5/16 |
| 2014 | .584 | 9.6 | .314 | 31.63 | NA | 5 | 90 | NA | NA |
| 1914 | .663 | 9.3 | .300 | 30.88 | 9 | NA | 90 | NA | NA |
| 1814 | .804 | 8.6 | .284 | 29.88 | 8 | NA | 65 | NA | NA |
| 1714 | .967 | 8.1 | .268 | 29.38 | 7 | NA | 60 | NA | NA |
| 1614 | 1.157 | 7.7 | .251 | 28.25 | 5 | NA | 50 | NA | NA |
| 1514 | 1.384 | 6.8 | .244 | 26.50 | 5 | NA | 50 | NA | NA |

XX75 PLATINUM PLUS™

7075-T9 ALUMINUM ALLOY

- Hard-anodized finish
- Straightness: ± .002"
- Super or G UNI bushings®—installed
- Components—sold separately



COMPONENTS



Bullet Point



RPS Insert



6.5MM Super UNI Bushing®
(19 grains)



4MM G-UNI Bushing®
(for sizes 1914 and smaller)



6.5MM Super 3D Nock™
(13 grains)



Microlite™ Super Nock® 6.5MM
(8 grains)



4MM Micro Nock
(6 grains)



4MM G Nock™
(7 grains) (for sizes 1914 and smaller)

| Size | Spine | Shaft Weight GPI | Shaft O.D. Inches | Minimum Stock Length Inches | Bushing Weight 4MM (Grains) | Bushing Weight 6.5MM (Grains) | Bullet Point Weight (grains) | Insert Weight (grains) | Screw-In Point Size |
|------|-------|---------------------|----------------------|-----------------------------------|--------------------------------|----------------------------------|---------------------------------|---------------------------|------------------------|
| 2213 | .464 | 9.8 | .344 | 30.50 | NA | 15 | 90 | 52 | 11/32 |
| 2114 | .513 | 9.9 | .328 | 30.00 | NA | 15 | 90 | 52 | 11/32 |
| 2016 | .537 | 10.6 | .312 | 31.00 | 17 | 12 | 90 | 40 | 11/32 |
| 2013 | .616 | 9.0 | .313 | 32.00 | 14 | 9 | 90 | NA | NA |
| 1916 | .627 | 10.0 | .297 | 30.00 | 13 | 9 | 90 | 30 | 11/32 |
| 1913 | .738 | 8.3 | .298 | 31.00 | 14 | 9 | 90 | 30 | 11/32 |
| 1816 | .759 | 9.3 | .281 | 29.00 | 11 | 7 | 75 | 25 | 5/16 |
| 1716 | .882 | 9.0 | .266 | 29.00 | 9 | NA | 65 | NA | NA |
| 1616 | 1.082 | 8.4 | .250 | 27.50 | 7 | NA | 60 | NA | NA |
| 1516 | 1.405 | 7.3 | .234 | 26.75 | 5 | NA | 50 | NA | NA |
| 1416 | 1.685 | 7.2 | .219 | 26.25 | 5 | NA | 50 | NA | NA |

XX75 JAZZ™

7075 AEROSPACE ALLOY

- Hard-anodized finish
- Straightness: ± .005"
- Bushing installed
- Made In USA



COMPONENTS SOLD SEPARATELY



Bullet Point



RPS™ Insert



4MM G Nock™
(for sizes 1916 and smaller) (7 gr.)



4MM G-UNI Bushing®
(for sizes 1914 and smaller)

| Size | Spine | Shaft Weight GPI | Shaft O.D. Inches | Minimum Stock Length Inches | Nock Size | Bullet Point Weight (grains) | Insert Weight (grains) | Screw In Point Size |
|------|-------|------------------|-------------------|-----------------------------|----------------|------------------------------|------------------------|---------------------|
| 2016 | .567 | 10.6 | .312 | 32.00 | 6.5MM | 90 | 20 | 5/16 |
| 1916 | .627 | 10.0 | .297 | 31.00 | 4MM | 90 | 16 | 5/16 |
| 1816 | .759 | 9.3 | .281 | 30.00 | 4MM | 75 | 12 | 9/32 |
| 1716 | .882 | 9.0 | .266 | 29.00 | 4MM | 65 | 10 | 17/64 |
| 1616 | 1.082 | 8.4 | .250 | 28.50 | 4MM | 60 | NA | NA |
| 1516 | 1.405 | 7.3 | .234 | 27.50 | 4MM | 50 | NA | NA |
| 1416 | 1.685 | 7.2 | .219 | 27.00 | 4MM | 50 | NA | NA |
| 1214 | 2.501 | 5.9 | .197 | 26.50 | 4MM DIRECT FIT | 45 | NA | NA |



GENESIS®

7075 AEROSPACE ALLOY

- Hard-anodized
- Straightness: ± .005"
- UNI bushing®, nock, and point—installed
- Black, NEW olive green, silver & teal
- Made In USA



National Archery in the Schools Program
The ONLY arrow approved for all NASP® tournaments and events.

INSTALLED



Genesis™ Point



UNI Bushing®
(18 gr.)



4MM N Nock™
(7 gr.)



| Size | Spine | Shaft Weight GPI | Shaft O.D. Inches | Minimum Stock Length Inches |
|------|-------|------------------|-------------------|-----------------------------|
| 1820 | 0.595 | 12.2 | .282 | 30.00 |

Genesis is a trademark of Genesis Archery.

BEGINNER ARCHERY

SCOUT 2™

DURABLE FIBERGLASS CONSTRUCTION

Over Nock – installed
Sleeve Point – installed
26" length

RECURVE BOW

The Easton® beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron™ string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and arm guard

Kit colors: Black and Realtree® Xtra



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.
Dacron is a trade mark of Dupont.

EZ FLETCH™

(A) SMALL DIAMETER MULTI-KIT

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"



(B) SMALL DIAMETER 2" MINI HELICAL TOOL

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"



(C) LARGE DIAMETER MULTI-KIT

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"



(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"



NOCKS



NEW

4MM Microlite™ Nock (6 grains)
Throat: 0.112
Dozen Pack and 100-count Bulk

- Bright Green ● Orange ● Red
● Smoke ○ White ● Yellow



4MM G Nock™ (6 grains)
Throat: Small: 0.088, Large: 0.098
Dozen Pack and 100-count Bulk

- Blue ○ White ● Green ● Orange ● Red
● Lemon Lime ● Pink ● Smoke ● Black



5MM X Nock™ (9 grains)
Throat: 0.111
Dozen Pack and 100-count Bulk

- Bright Green ● Smoke ● Orange
○ White ● Red ● Yellow



6MM H Nock™ (9 grains)
Throat: 0.111
Dozen Pack and 100-count Bulk

- Bright Green ● Orange ● Red
● Smoke ○ White ● Yellow



6.5MM MicroLite™ Super Nock™ (8 grains)
Throat: 0.108
Dozen Pack and 100-count Bulk

- Bright Green ● Orange ● Red
● Smoke ○ White ● Yellow



6.5MM 3D Super Nock™ (13 grains)
Throat: 0.103
Dozen Pack and 100-count Bulk

- Blue ○ White ● Green ● Orange ● Red
● Lemon Lime ● Pink ● Smoke ● Black



Pin Nock (2 grains)
Throat: 0.108
Dozen Pack and 100-count Bulk
● Blue ○ White ● Green ● Orange ● Red
● Lemon Lime ● Pink ● Smoke ● Black



G Pin™ Nock (4 grains)
Throat: 0.108
Dozen Pack and 100-count Bulk
● Blue ○ White ● Green ● Orange ● Red
● Lemon Lime ● Pink ● Smoke ● Black

VANES

All weights are within ±0.5 grain

3" DIAMOND™ HD VANES BY BOHNING®



Size 300 Length 3" Height 0.5" Weight 10 grains Packaging 100 Count ● Bright Green ● Yellow ● Red ○ White ● Orange

DIAMOND™ VANES BY AAE®



● Bright Green ● Blue ● Yellow ● Fire Orange ○ White ● Black ● Hot Pink

| Size | Length | Height | Weight | Packaging | Size | Length | Height | Weight | Packaging |
|------|--------|--------|----------|-----------|------|--------|--------|----------|-----------|
| 175 | 1.75" | 0.375" | 3 grains | 100 Count | 280 | 2.875" | 0.5" | 6 grains | 100 Count |
| 235 | 2.35" | 0.375" | 4 greins | 100 Count | 235 | 3.875" | 0.5" | 8greins | 100 Count |

TITE FLIGHT™ VANES BY AAE® Special rib adds stiffness to cut in-flight flutter and noise



Size 200 Length 2" Height 0.33" Weight 4 grains Packaging 100 Count ● Hot Pink ○ White ● Yellow ● Bright Green ● Black ● Fire Orange ● Blue

SPIN WING™ VANES 1.75-inch vanes available in right wing • Packaging - 50-count bag



Colors ● Black ○ White ● Blue ● Red ● Yellow

3" BTV™ VANES BY AAE™



Size 300 Length 3" Height 0.5" Weight 10 grains Packaging 100 Count ● Yellow ● Red ● Orange ● Bright Green ○ White

2" BULLY™ VANES BY BOHNING® Ultra-stiff design for high speed stability.



Size 200 Length 2" Height 0.568" Weight 6.5 grains Packaging 100 Count ● Fire Orange ● Bright Green ● Red ● Yellow ○ White

Diamond is a trademark of the Bohning Company Ltd. • AAE is a trademark of Arizona Archery Enterprises Inc. • Spin Wing is a trademark of Range-O-Matic Archery Company.

STABILIZERS



HALCYON™

- Very low resonance for faster damping and a steadier hold
- Unmatched wind drag resistance
- Class-leading 14MM ultra-high modulus graphite fiber construction
- Windcutter 360 design
- Weights not included

| | Main Stabilizers | | | Side Rods | | |
|--------|------------------|-------------|-------------|-------------|-------------|-------------|
| Size | 27 in-69 cm | 30 in-76 cm | 33 in-84 cm | 10 in-25 cm | 12 in-30 cm | 15 in-76 cm |
| Ounces | 4.4 | 4.7 | 5 | 2.9 | 3 | 3.4 |
| Grams | 125.5 | 133 | 140 | 83.1 | 88.3 | 96.6 |



Halcyon stabilizers come with a reusable protective sleeve



CONTOUR CS™

- Complex unidirectional and cross weave high modulus carbon and ultra high modulus graphite construction for extreme stiffness, fast damping rate and a steadier hold for both compound and recurve
- Proven in both compound and recurve top level competition worldwide
- Extremely light weight, greater stiffness to weight ratio than any stabilizer currently available
- Drag reducing Windcutter 360 design
- Weights not included

Includes reusable protective sleeve and 1/4-20 to 5/16-24 adapter.

| | Main Stabilizers | | | Side Rods | | |
|--------|------------------|-------------|-------------|-------------|-------------|-------------|
| Size | 27 in-69 cm | 30 in-76 cm | 33 in-84 cm | 10 in-25 cm | 12 in-30 cm | 15 in-76 cm |
| Ounces | 4.0 | 4.3 | 4.5 | 2.5 | 2.6 | 2.85 |
| Grams | 115 | 122 | 128 | 71 | 74 | 81 |



Contour CS stabilizers come with a reusable protective sleeve

STABILIZERS



CONTOUR™

- Complex High Modulus Carbon, multi-diameter design
- Faster damping and a steadier hold with less wind drag
- Stiff and light self-damping design ideal for recurve performance
- Weights not included

| | Main Stabilizers | | | | Side Rods | | |
|--------|------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Size | 24 in-61 cm | 27 in-69 cm | 30 in-76 cm | 33 in-84 cm | 10 in-25 cm | 12 in-30 cm | 15 in-38 cm |
| Ounces | 3.7 | 4.0 | 4.3 | 4.6 | 2.5 | 2.7 | 2.9 |
| Grams | 106 | 114 | 123 | 131 | 71 | 75 | 83 |



Z-FLEX™

- High stiffness ideal for top level compound and 3D competition
- High Modulus Carbon construction
- Built-in AVRS™ damping system
- Less aiming float and highly efficient
- Weights not included

| | Main Stabilizers | | | | Side Rods | | |
|--------|------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Size | 24 in-61 cm | 27 in-69 cm | 30 in-76 cm | 33 in-84 cm | 10 in-25 cm | 12 in-30 cm | 15 in-38 cm |
| Ounces | 5.8 | 6.2 | 6.5 | 6.9 | 3.2 | 3.5 | 3.9 |
| Grams | 164 | 175 | 186 | 196 | 92 | 99 | 111 |



- Ultra-stiff design for steady aiming
- AVRS™ damping for active-shock management
- Lowest mass and highest efficiency



Z-Flex stabilizers come with a reusable protective sleeve



Z COMP™

- Balanced feel with lower mass and smaller diameter
- High Modulus Carbon construction
- Weights not included

| | Main Stabilizers | | Side Rods | |
|--------|------------------|-------------|-------------|-------------|
| Size | 27 in-69 cm | 30 in-76 cm | 10 in-25 cm | 12 in-30 cm |
| Ounces | 6.2 | 6.5 | 3.2 | 3.5 |
| Grams | 175 | 186 | 92 | 99 |



- Ultra-stiff design for steady aiming
- Fast-damping high frequency response
- AVRS™ damping for active-shock management
- 100% high modulus carbon at a smaller 0.600" diameter

STABILIZER COMPONENTS

PRO-LINK™ EXTENDER

- Internal stainless steel reinforcement beam with high modulus carbon construction
- Stiffest extension ever made by Easton
- Engineered for extreme reliability

| | PROLINK Extender | | |
|--------|------------------|------------|------------|
| Size | 6 in-15 cm | 5 in-13 cm | 4 in-10 cm |
| Ounces | 4.6 | 4.3 | 4.0 |
| Grams | 131 | 122 | 113 |



Pro-link internal steel beam system

VARI-WEIGHTS™



| | Ounces | Grams |
|------------|--------|-------|
| Module | 1.5 | 43 |
| 1/2 Module | 0.75 | 21 |
| Cap | 1.5 | 43 |

FLAT VARI-WEIGHTS 5/16-24 THREAD

| | Ounces | Grams |
|----------------------|--------|-------|
| Halcyon/Contour Base | 2.0 | 57 |
| 1 Oz. | 1.0 | 28.5 |
| 2 Oz. | 2.0 | 57 |
| 4 Oz. | 4.0 | 114 |



ALSO AVAILABLE IN BLACK

MOUNTS

FIXED V-BAR WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt— included
- 35° flat 4.5 oz./128.6 grams
- 35° flat 35° X 17° 4.3 oz./122.6 grams



CONTOUR™ AND Z-FLEX™ V-BAR CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down



ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel eye bolt included
- 4.2 oz./119.0 grams



ADJUSTABLE V-BAR WITH BOLT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt included
- 8.1 oz./229.6 grams



ULTRALIGHT FIXED V-BAR WITH BOLT

- Compact design & minimal weight for improved bow balance
- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" connector bolt— included
- 35° flat 2.4 oz./70.0 grams
- 35° flat 35° X 17° 2.2 oz./64.8 grams



QUICK DISCONNECT MOUNT

- Stainless steel
- 7075 alloy
- Precision design
- Zero and 10 degree drop models available



ULTRALIGHT ADJUSTABLE SIDE ROD ADAPTER WITH QUICK DISCONNECT

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Connector bolt included
- 3.3 oz./93.5 grams



ULTRALIGHT ADJUSTABLE V-BAR WITH QUICK DISCONNECT

- Infinite adjustability
- Cup and cone joint for solid lock-down
- Suitable for compound or recurve bows
- Connector bolt included
- 6.1 oz./172.9 grams



TOOLS & SUPPLIES

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz.
- HIT approved



CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



BCY™ POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool



FASTSET™ VANE GEL

- Sizes: 3 gram



HIT™ EPOXY SINGLE USE

- Provides a permanent bond
- Flexible, non-brittle formulas



UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz.



QUICKBOND™ PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



FLETCH-TITE® PLATINUM

- Size: 22-gram tube



HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Also available in 10" shop stick



FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



WEDGE ARROW PULLER

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools



BCY is a trademark of BCY Bowstring.

Fletcher-Tite® is a registered trademark of Bohning Company LTD.

TOOLS & SUPPLIES

ELITE NOCK AND D-LOOP PLIERS

- Maximizes mechanical advantage for tightest possible D-loops
- Patented dual-jaw design
- Convenient and versatile archery tool
- Six tools in one



ARCHERY OMNI TOOL BY FIX-IT STICKS®- 17 PIECE

- Integrates 17 of the most popular Standard & Metric Hex, and Star bit sizes into the most compact archery tool ever produced
- Snaps together in a T-shape for leverage
- Includes the following bit sizes:
Standard Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050"
Metric Sizes: 1.5, 2.5, 3.0
Star Tip Sizes: T10, T15, T20



PRO HEX FOLD UP SET - STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



PRO HEX FOLD UP SET - METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and a 1/8" flat blade screwdriver



PRO HEX STUBBY 10 PIECE "L" WRENCH SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



PRO ARCHERY NEEDLE-NOSE PLIERS

- A must have for any serious bow mechanic
- Rubber-coated handle
- Needle-nose plier design with archery specific features for D-loop stretching and hot-melt point installation



Omni Tool is a trademark of Fix It Sticks.

TOOLS & SUPPLIES

BOW SQUARES

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up



9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to 27/64" diameters



ARCHERY ESSENTIALS™ TOOL KITS

- Kit items save 30% versus items sold separately
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors

12 AND 8-PIECE KITS INCLUDE:

- Extra large folding allen wrench set
- Nock installation & removal tool
- Wedge arrow puller
- Zippered case cube
- Bowstring wax
- Serving thread
- D-Loop rope
- Broadhead wrench

12-PIECE KIT ADDS:

- D-Loop pliers
- Bow-square-L model
- Small folding allen wrench set
- Arrow prep tool kit



8-PIECE VALUE PACK

12-PIECE PRO SHOP



SHOOTING ACCESSORIES



STAY SHARP™ BROADHEAD CASE

- Grippers ensure broadhead sharpness by supporting ferrules without contacting blades
- Hold six mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads
- Dimensions: approximately 5"W x 4"H x 2"D

DELUXE ARM GUARDS

- Progressive designs molded from durable polycarbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and "dog" bone shapes
- Colors: blue, red, yellow, and smoke



CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL, and XXL
- Color: black/white



COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: black



STIFF WRIST SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: black, camo, green, pink, blue, red, and orange



DELUXE PARACORD DIAMOND WRIST SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Colors: black, camo, green, pink, blue, red, and orange



NEOPRENE WRIST SLING


- Durable, lightweight neoprene construction
- Easy-adjust strap



COMPETITION QUIVERS

ELITE™ FIELD QUIVER WITH BELT

- European-inspired luxurious design
- Technical synthetic leather construction
- Infinitely adjustable and sturdy, Elite quiver belt uses secure T-style buckle
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet, customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included-release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white

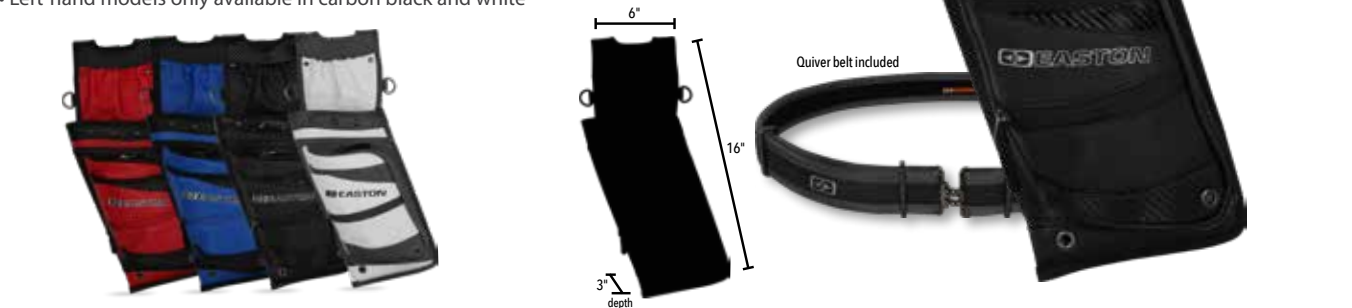

ELITE™ QUIVER BELT

- One size fits most
- T-style buckle
- Included with Elite quivers—also sold separately
- Colors: red, blue, grey, carbon black, and white



ELITE™ RELEASE POUCH



ELITE™ TAKEDOWN HIP QUIVER WITH BELT

- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, Elite quiver belt with T-style buckle for secure operation-included
- Allows quiver body tube to separate from belt loop for easy storage
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors: red, blue, carbon black, and white
- Left-hand models only available in carbon black and white



DELUXE FIELD QUIVER WITH BELT

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Adjustable, sturdy Deluxe Quiver belt with T-style buckle included
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch sold separately
- Colors: silver, red, blue, and black
- Left-hand models only available in black and silver



DELUXE QUIVER BELT

- One size fits most
- Innovative hook-and-loop adjustment
- Easy on/off T-buckle connection



DELUXE RELEASE POUCH



DELUXE TAKEDOWN HIP QUIVER WITH BELT

- Allows quiver body tube to separate from belt loop for easy storage
- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Adjustable Deluxe Quiver Belt with T-style buckle included
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory-attachment rings
- Colors: silver, red, blue, and black
- Left-hand models only available in black and silver



RECREATIONAL QUIVERS

FLIPSIDE™ 4-TUBE HIP QUIVER WITH BELT

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop pocket for right/left side wear
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: black, red, blue, Realtree Edge®, & ranger green



FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: black, red, blue, Realtree Edge® & ranger green



FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: black, red, blue, Realtree Edge® & ranger green

REPLACEMENT FLIPSIDE™ ARROW TUBE



REPLACEMENT BELT CLIP



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

TRAVEL BOWCASES

BOWTRUK™ GEN 2 4716, 4017 & 3616 TRAVEL BOWCASE

- Accommodates two bows up to 47 inch overall length
- Ballistic nylon shell with TPU coated exterior for durability
- Six interior & exterior accessory pockets for bow-sights, gear, and arrows
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Double seatbelt-style bow retaining straps
- Padded carry handle
- Compatible with Easton arrow totes & boxes
- Hybrid hard/soft shell perimeter protection
- Dark grey

SPECIFICATIONS

4716—47" L X 16" W X 9" H 19 lbs.

4017—40" L X 17" W X 9" H 16 lbs.

3616—36" L X 16" W X 9" H 14 lbs.



BOWCASES

WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with Easton Deluxe Hip/Field quivers
- Dense 360° exterior/corner cam padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: black



BOWCASES

WORKHORSE MAX™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Ten interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Dense 360° exterior padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Shoulder strap included
- Colors: charcoal grey, tundra tan



WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- Eight interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable hook-and-loop bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: charcoal, Realtree Edge™



BOW-GO™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow mounted quivers and maximum inside storage
- Four interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: black, ranger green, Realtree Edge™, olive/grey



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

BOWCASES

MICRO FLATLINE™ 3618

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors: black/grey, tundra tan, Realtree Edge™



Realtree Edge is a trademark of Jordan Outdoor Enterprises, Ltd.

GENESIS™ 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: red, blue, black and pink
- 40" L x 14" H

Genesis is a trademark of Brennan Industries.



BOWSLICKER™ BY ALPINE INNOVATIONS

- Easy, secure carry with patented limb loop design
- Quick and quiet removal
- Keep cams and strings protected from brush
- Fits all compound bows, including parallel limbs, up to 36" axle-to-axle
- Color: olive green

Crossbow Slicker™ also available.



Officially Licensed Product
Protected by US Patents:
9,038,878 & 9,310,158


Bowslicker and Croosbow Slicker are trademarks of Alpine Innovations.



BOWCASE ACCESSORIES

CASE CUBES™ BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage

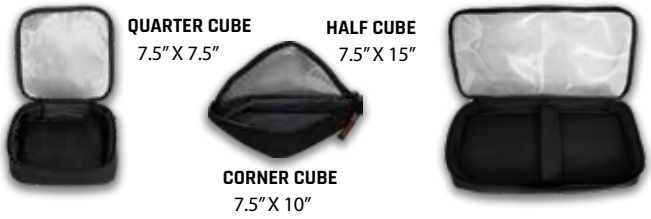

DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
 - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
 - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
 - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
 - Round Arrow Tote (12-arrow) - adjustable length



PACKS

CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with great features
- High-denier fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: grey, blue, red, and black



DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks



Download our App or scan to find correct arrow size

Easton Factory Provides Premier Arrows for the World's Best Archers

Shooters may not know as they draw an Easton arrow, the shaft on their rest came off the production line in Salt Lake City, Utah — the only dedicated arrow factory in the United States. Using their unique manufacturing position, the goal is to provide the highest quality, most precise arrows for all types of archery instilling maximum confidence when an archer draws his or her bow. Easton employs workers in its arrow manufacturing facilities in Utah and Indiana where they produce a complete line of arrows for the target and bowhunting markets.

ALLOY SHAFT & COMPONENT SPECIFICATIONS

| Size | Shaft Weight | | Spine @ 28" Span | Minimum ¹ Stock Length | | UNI System | | | Adjustable Points | NIBB Point | One-piece Bullet Point | RPS Insert Alum. | RPS Point Size |
|------------|-----------------|------|----------------------|-----------------------------------|-------|-------------|----------------|-------------------|-------------------|---------------------|------------------------|---------------------|----------------|
| | XX75 | X7 | | XX75 | X7 | UNI Bushing | X Nock Bushing | Super UNI Bushing | | | | | |
| | Grains per Inch | | Deflection in Inches | Inches | | Grains | Grains | Grains | Grains | Grains ² | Grains | Grains ² | Grains |
| 1214 | 5.9 | — | 2.501 | 25.50 | — | — | — | — | — | — | 45 | — | — |
| 1416 | 7.2 | — | 1.684 | 26.25 | — | 2 | — | — | — | 46 | 50 | — | — |
| 1514 | — | 6.8 | 1.384 | — | 25.00 | 5 | — | — | — | 61 ⁹ | 50 | — | — |
| 1516 | 7.3 | — | 1.405 | 26.75 | — | 3 | — | — | — | 48 | 50 | — | — |
| 1614 | — | 7.7 | 1.157 | — | 26.75 | 5 | — | — | — | 51 | 50 | — | — |
| 1616 | 8.4 | — | 1.082 | 27.50 | — | 5 | — | — | — | 56 | 60 | — | — |
| 1714 | — | 8.1 | 0.967 | — | 27.75 | 7 | — | — | — | 56 | 60 | — | — |
| 1716 | 9.0 | — | 0.882 | 29.00 | — | 7 | — | — | — | 60 | 65 | 10 | 17/64 |
| 1814 | — | 8.6 | 0.804 | — | 29.50 | 8 | — | — | — | 60 | 65 | — | — |
| 1816 | 9.3 | — | 0.759 | 29.00 | — | 8 | 4 | — | — | 63 | 75 | 12 | 9/32 |
| 1820 | 12.2 | — | 0.595 | 29.00 | — | — | — | — | — | — | 59 | — | — |
| 1913 | 8.3 | — | 0.738 | 31.00 | — | 9 | — | — | — | 64 | 90 | 18 | 5/16 |
| 1914 | — | 9.3 | 0.663 | — | 29.50 | 9 | — | — | — | 64 | 90 | — | — |
| 1916 | 10.0 | — | 0.627 | 30.00 | — | 9 | 7 | — | — | 72 | 90 | 16 | 5/16 |
| 2013 | 9.0 | — | 0.616 | 32.00 | — | — | — | 5 | — | 68 | 90 | 21 | 5/16 |
| 2014 | — | 9.6 | 0.584 | — | 31.50 | — | — | 5 | 100 | 71 | 90 | — | — |
| 2016 (500) | 10.6 | — | 0.537 | 31.00 | — | — | — | 4 | — | — | 90 | 20 | 5/16 |
| 2018 | 12.3 | — | 0.468 | 30.50 | — | — | — | 4 | — | — | 90 | 19 | 5/16 |
| 2114 | 9.9 | 9.9 | 0.513 | 30.00 | 31.00 | — | — | 7 | — | 78 | 90 | 25 | 5/16 |
| 2117 (400) | 12.0 | — | 0.413 | 31.50 | — | — | — | 7 | — | — | 100 | 25 | 5/16 |
| 2213 | 9.8 | 9.9 | 0.464 | 30.50 | 32.00 | — | — | 9 | — | 88 | 90 | 30 | 11/32 |
| 2214 | — | 10.4 | 0.431 | — | 31.90 | — | — | 9 | 100 | 103 | 100 | — | — |
| 2215 | 10.7 | 9.5 | 0.425 | 31.50 | — | — | — | 9 | — | — | 100 | 30 | 11/32 |
| 2216 | 12.0 | — | 0.382 | 32.00 | — | — | — | 9 | 100 | — | 100 | 29 | 11/32 |
| 2219 | 13.8 | — | 0.342 | 32.00 | — | — | — | 9 | — | — | 100 | 29 | 11/32 |
| 2312 | — | 9.5 | 0.429 | — | 31.75 | — | — | 11 | — | 99 | 100 | 37 | 11/32 |
| 2314 | 10.7 | 10.8 | 0.377 | 32.00 | 32.25 | — | — | 10 | 100 | — | 100 | 34 | 11/32 |
| 2315 (340) | 11.7 | 11.7 | 0.340 | 32.00 | 32.6 | — | — | 11 | 100 | — | 100 | 37 | 11/32 |
| 2317 | 13.3 | — | 0.303 | 32.00 | 32.75 | — | — | 11 | 100 | — | 100 | 37 | 11/32 |
| 2318 | — | 13.7 | 0.304 | — | 32.75 | — | — | 11 | — | — | 200 | — | — |
| 2413 | 10.4 | 10.5 | 0.372 | — | 34.00 | — | | 12 | — | 110 | 100 | 40 | 11/32 |
| 2512 | — | 10.3 | 0.329 | — | 33.00 | — | — | 15 | — | 108 | 100 | 52 | 11/32 |
| 2613 | — | 11.5 | 0.272 | — | 33.00 | — | — | 17 | — | — | 150 | 58 | 3/8 |
| 2712 | — | 11.3 | 0.267 | — | 33.00 | — | — | 19 | 200 | — | 150/300 | — | — |

— Indicates not available
1 Length is approximate stock shaft length for each size.
2 NIBB point grain weights are ±0.5 grain. All other components are ±1 grain

LIMITED WARRANTY
The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see www.eastonarchery.com.

 **WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE AT WWW.BSAFE.WS OR 877-INFO-ETP (877-463-6387).**

CHECK EVERY ARROW, EVERY SHOT

ARROW DAMAGE
Any arrow can be damaged, even when new. A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. Damage to an arrow shaft, or any of its components, may occur from improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. ***WARNING! NEVER SHOOT A DAMAGED ARROW.***

ARROW USE PRECAUTIONS
Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection information at www.eastonarchery.com/warning-use/). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, DISCARD THE ARROW. ***WARNING! NEVER SHOOT A DAMAGED ARROW.***

A loose or damaged nock may indicate a damaged arrow shaft or otherwise be dangerous. Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose or is damaged, DISCARD THE ARROW. ***WARNING! NEVER SHOOT AN ARROW WITH A LOOSE OR DAMAGED NOCK.***

BOW INSPECTION
Before shooting any arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at www.eastonarchery.com/shaft-selector/). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage. ***WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.***

ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:
1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel, look and listen for cracking (Figure 1). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged, DISCARD THE ARROW. ***WARNING! NEVER SHOOT A DAMAGED ARROW.***



2. While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (Figure 2). If the arrow “relaxes” or twists easily, the carbon has been damaged. DISCARD THE ARROW. ***WARNING! NEVER SHOOT A DAMAGED ARROW.*** A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW. ***WARNING! NEVER SHOOT A DAMAGED ARROW.***



CARBON ARROW CUTTING
Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

SOLVENTS
CAUTION: When removing fletchings, or for any other reason, do not soak any carbon arrow shaft in solvents. This can weaken the resin that bonds the carbon fibers. (For directions on arrow set up, refer to the Easton Tuning Guide.) ***WARNING! NEVER SHOOT A DAMAGED ARROW.***

To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.

 **WARNING:** Cancer and Reproductive Harm — www.P65Warnings.ca.gov

Some of the products listed in this Product Guide may be subject to California Proposition 65 warnings requirements. See product packaging or website for specific warning information. This Product Guide is intended for informational purposes only, not a solicitation for product sales.

EVERY MEDAL ONE ARROW



EASTONARCHERY.COM